



## Thermally-Enhanced High Power RF LDMOS FET 25 W, 50 V, 500 – 1400 MHz

### Description

The PTVA120251EA LDMOS FET is designed for use in power amplifier applications in the 500 MHz to 1400 MHz frequency band. Features include high gain and a thermally-enhanced package with bolt-down flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA120251EA  
Package H-36265-2

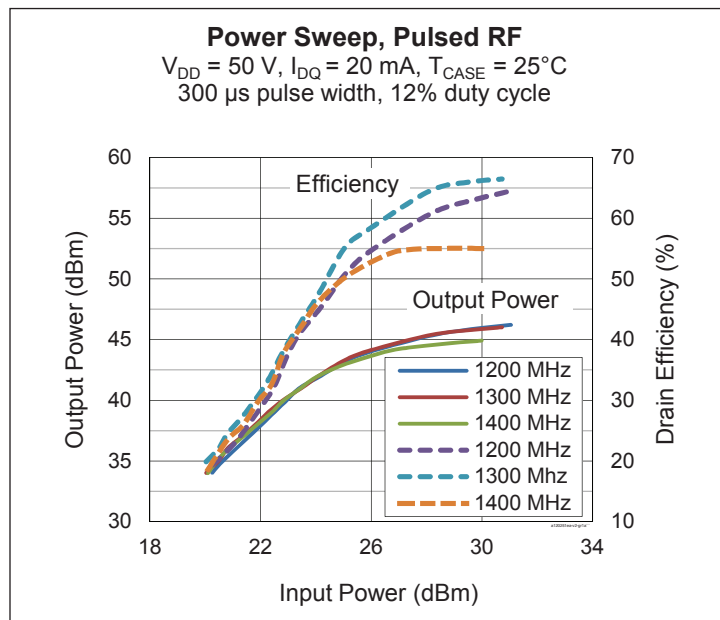

### Features

- Unmatched input and output
- High gain and efficiency
- Integrated ESD protection
- ESD HBM Class 2, per ANSI/ESDA/JEDEC JS-001
- Low thermal resistance
- Excellent ruggedness
- Pb-free and RoHS-compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at  $P_{OUT} = 25\text{ W}$ , under CW conditions

### RF Characteristics

**Typical RF Performance** (not subject to production test, verified by design/characterization in Infineon test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.02\text{ A}$ , Input signal ( $t_r = 5\text{ ns}$ ,  $t_f = 6.5\text{ ns}$ ), 300  $\mu\text{s}$  pulse width, 12% duty cycle, class AB test

Mode of operation	$f$ (MHz)	IRL (dB)	$P_{1dB}$			$P_{3dB}$			$P_{\text{droop(pulse)}}$ dB @ 30 W	$t_r$ (ns)	$t_f$ (ns)
			Gain (dB)	Eff (%)	$P_{OUT}$ (W)	Gain (dB)	Eff (%)	$P_{OUT}$ (W)			
Pulsed RF	1200	12	16.4	52	31	14.4	56	41	0.27	6	8
Pulsed RF	1300	11	16.0	56	32	14.0	59	40	0.20	6	8
Pulsed RF	1400	14	15.8	53	34	13.8	56	38	0.24	6	8

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics

**Pulsed RF Performance** (tested in Infineon test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.02\text{ A}$ ,  $P_{OUT} = 25\text{ W}$ ,  $f_1 = 1200\text{ MHz}$ ,  $f_2 = 1300\text{ MHz}$ ,  $f_3 = 1400\text{ MHz}$ , 300  $\mu\text{s}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	17	18	—	dB
Drain Efficiency	$\eta_D$	47	54	—	%
Return Loss	IRL	—	-13	-9	dB

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
	$V_{DS} = 105\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10.0	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	1.4	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 50\text{ V}$ , $I_{DQ} = 150\text{ mA}$	$V_{GS}$	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$





## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Junction Temperature	$T_J$	200	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}$ , $V_{DD} = 50\text{ V}$ , 25 W CW)	$R_{\theta JC}$	3.7	$^{\circ}\text{C/W}$





## Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PTVA120251EA V2	PTVA120251EAV2XWSA1	H-36265-2, ceramic open-cavity, single-ended, bolt-down	Tray
PTVA120251EA V2 R250	PTVA120251EAV2R250XTMA1	H-36265-2, ceramic open-cavity, single-ended, bolt-down	Tape & Reel, 250 pcs





**Typical RF Performance** (data taken in production test fixture)

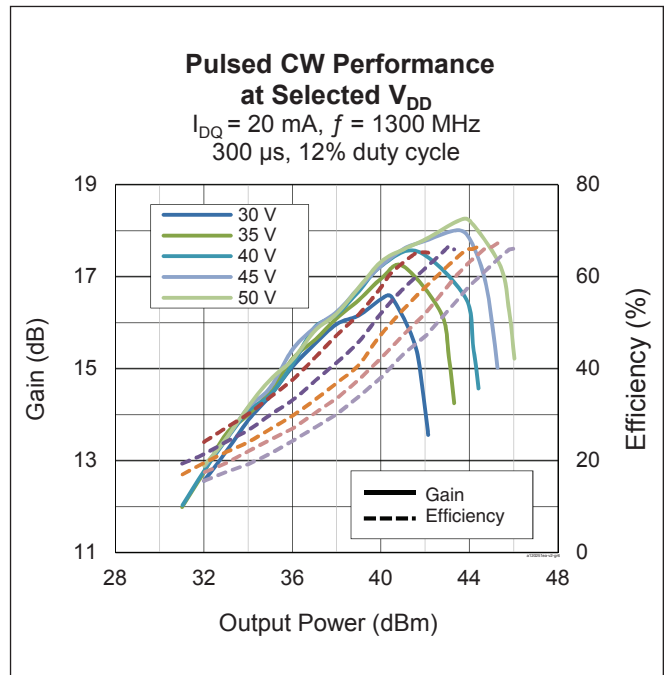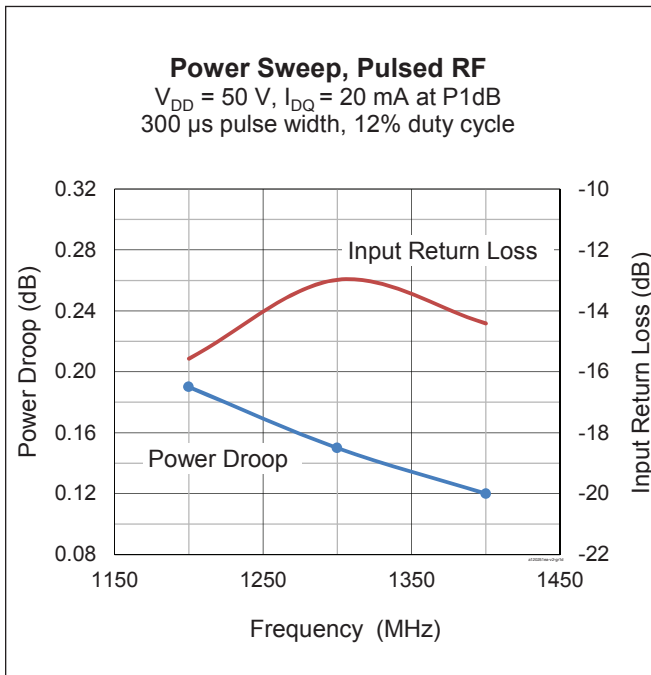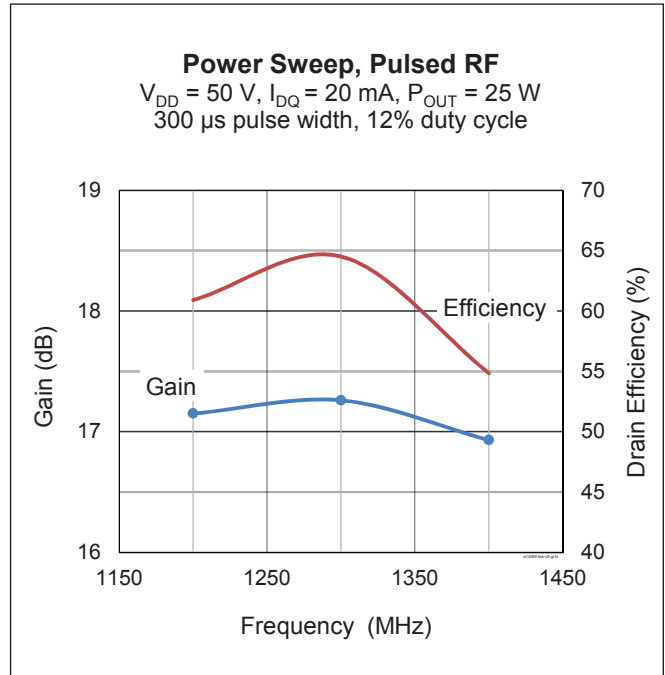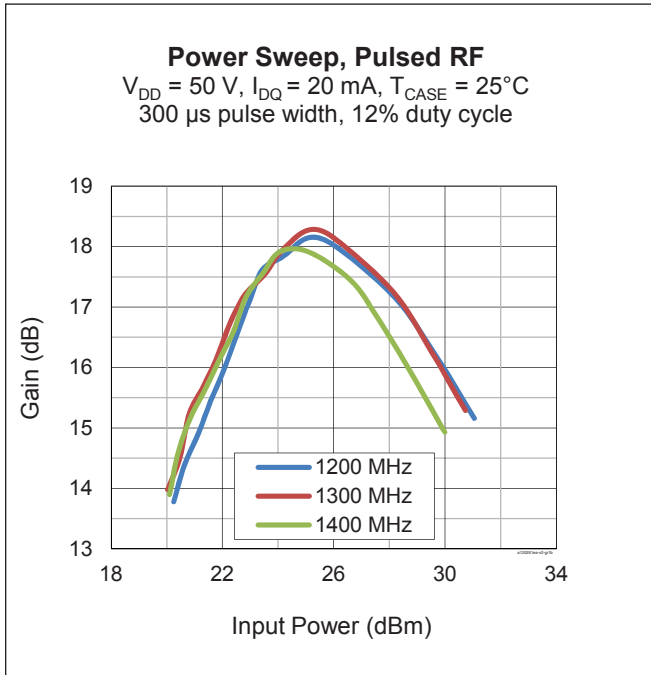





Typical RF Performance (cont.)

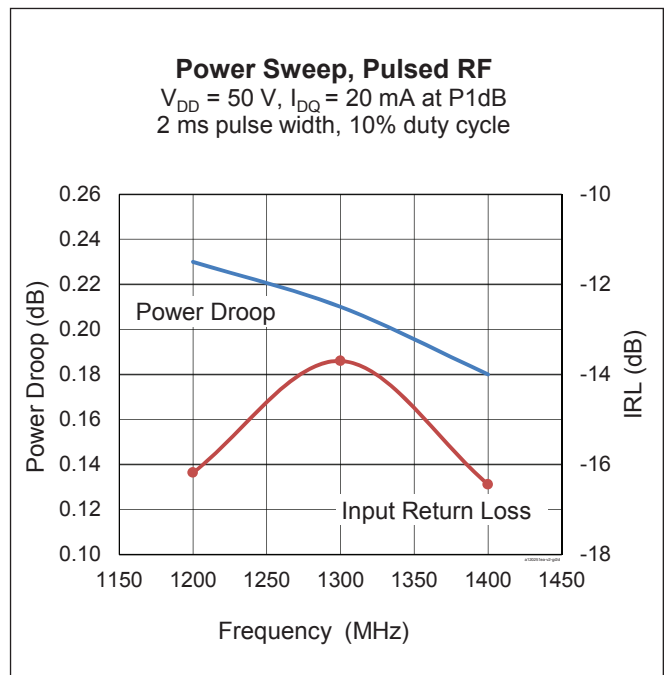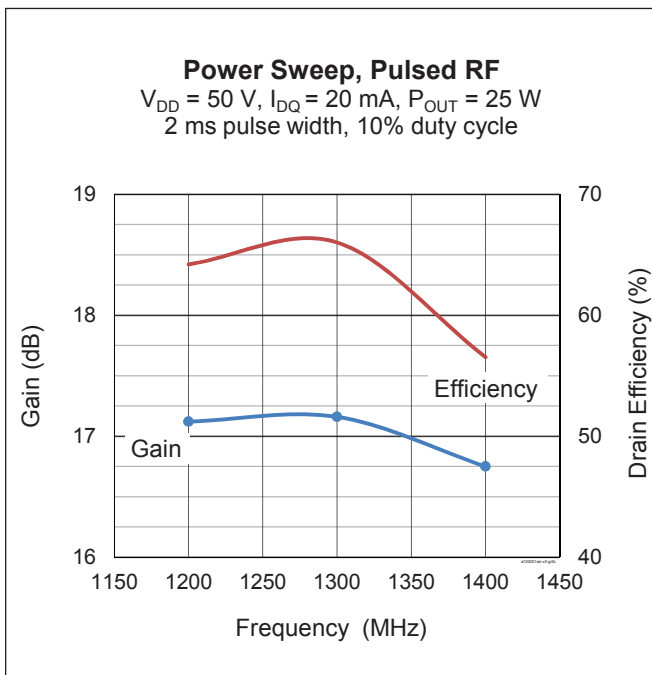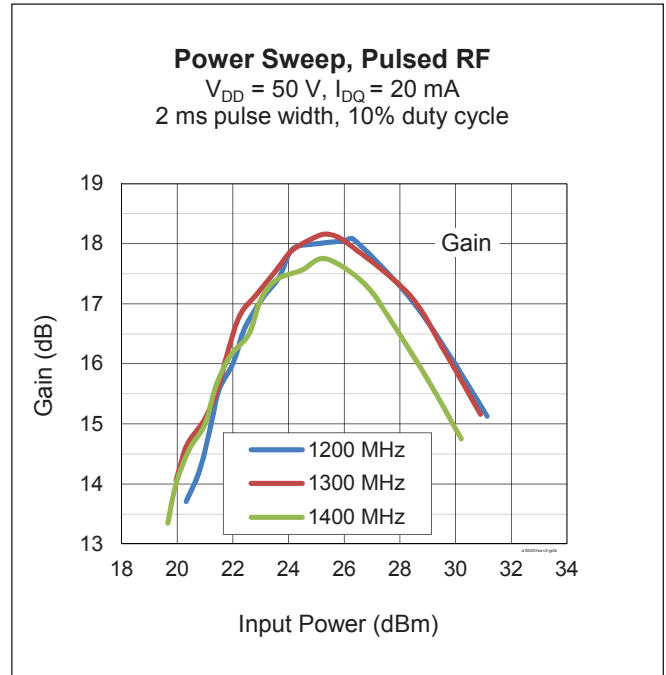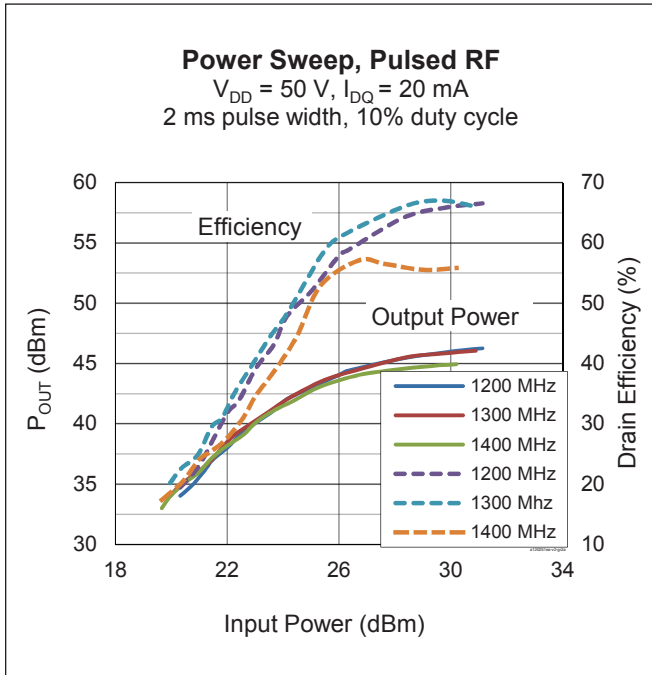



Typical RF Performance (cont.)

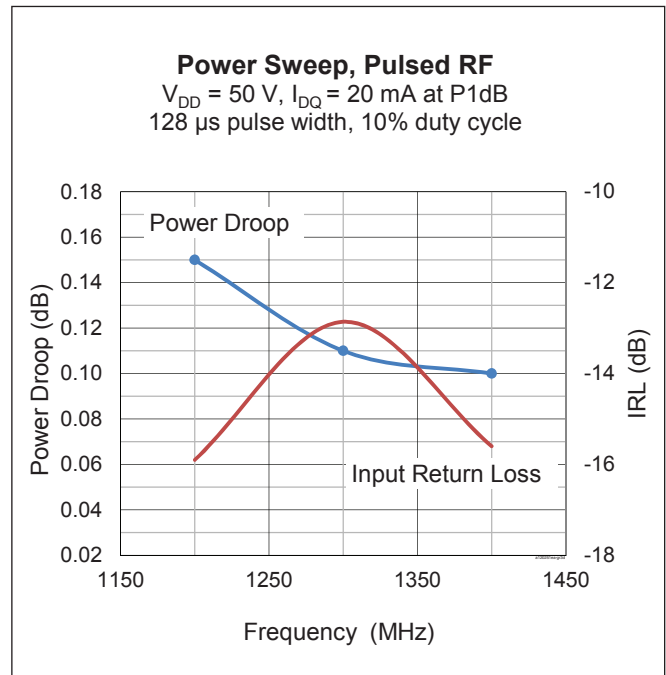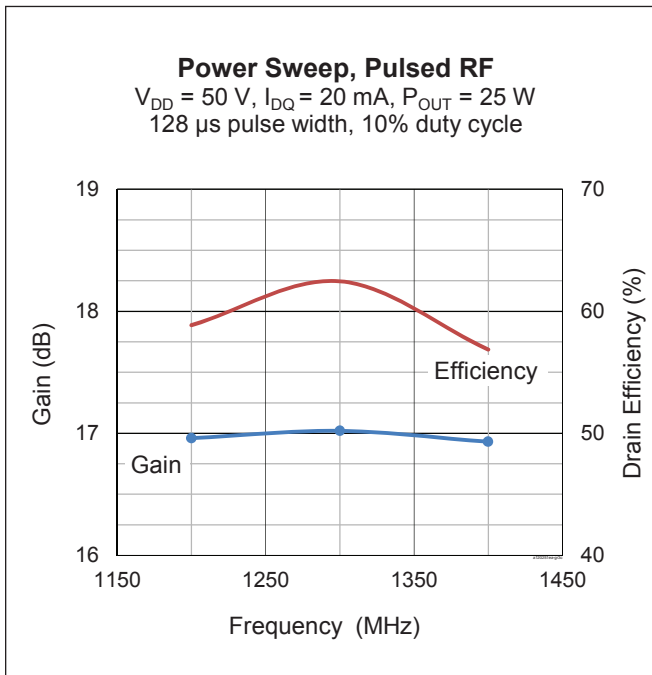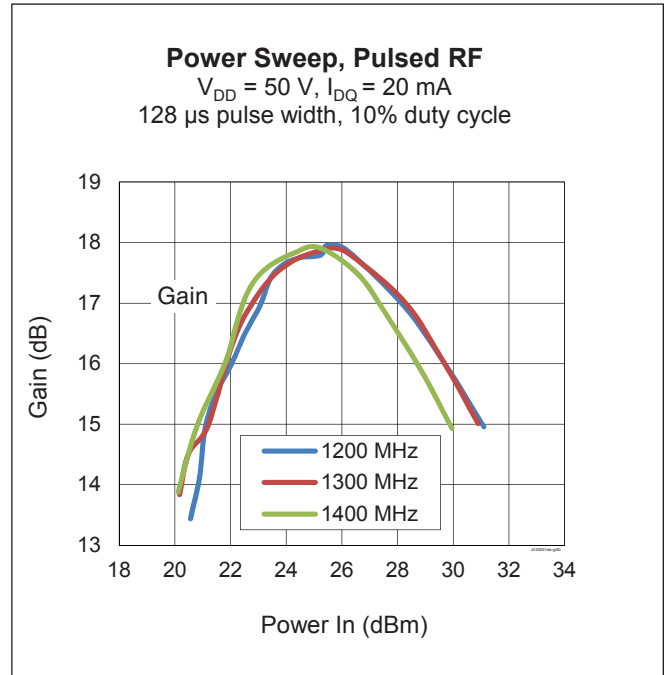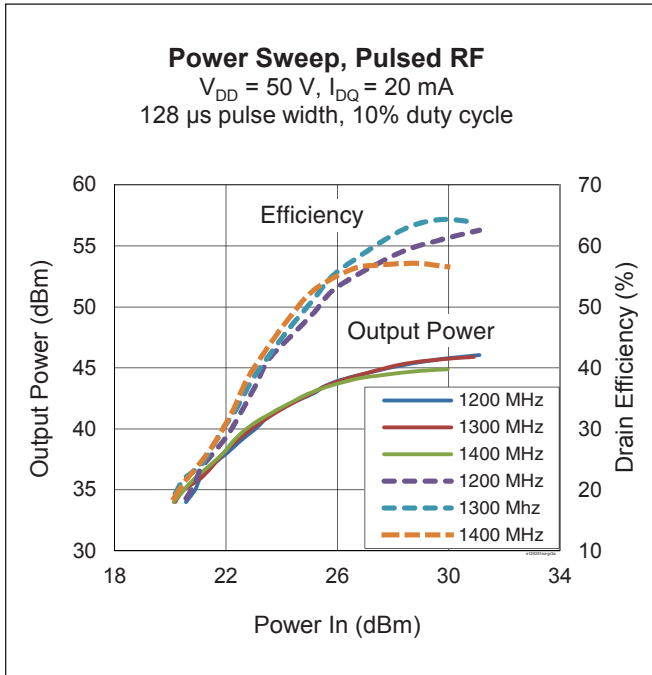

Typical RF Performance (cont.)

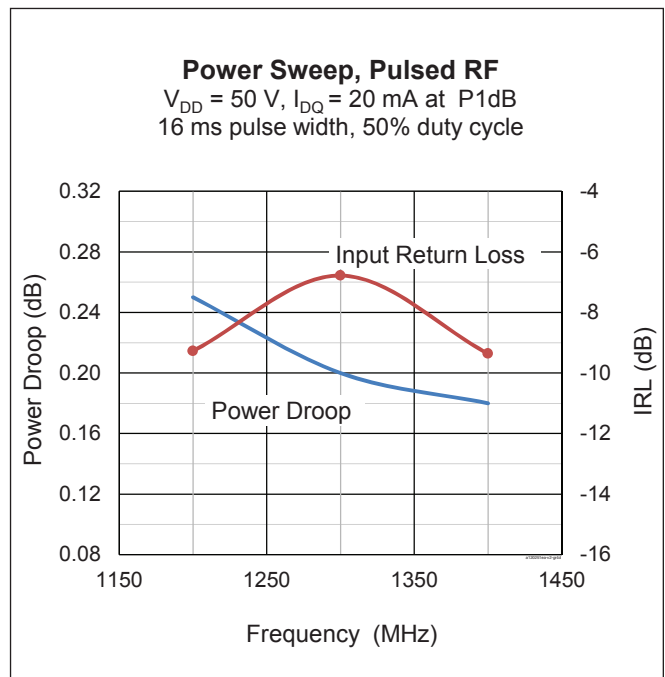
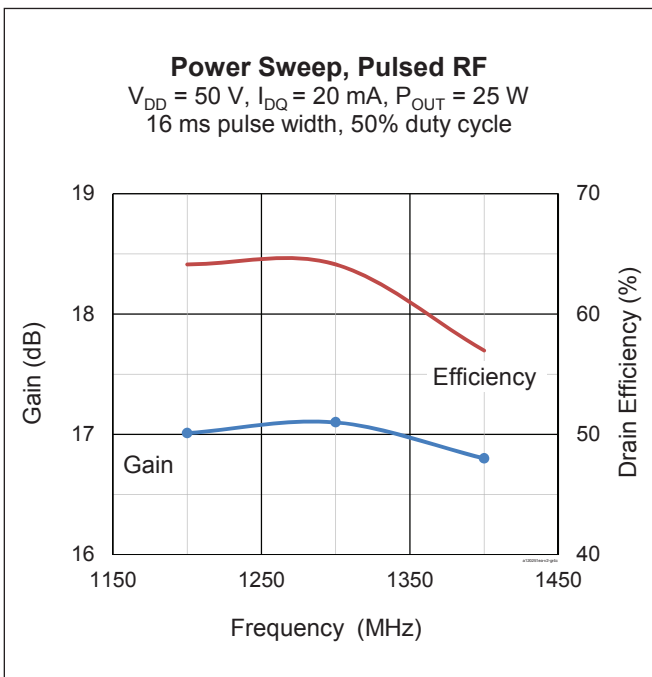
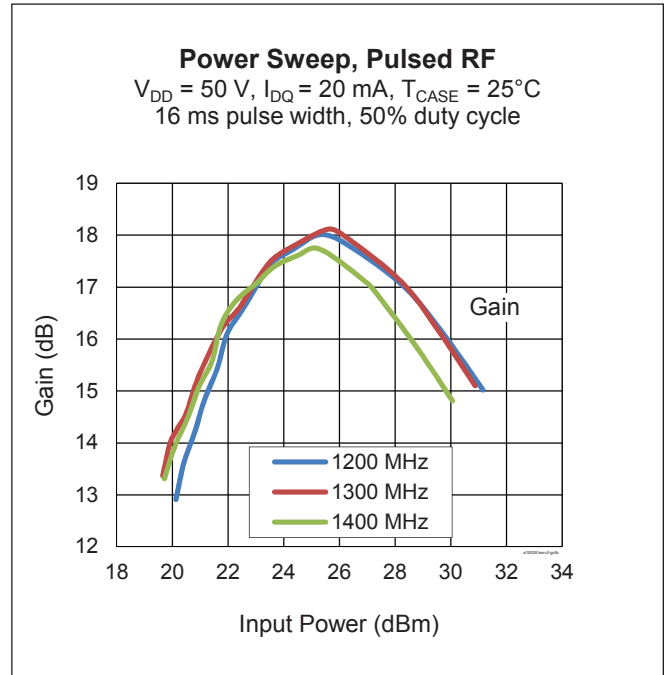
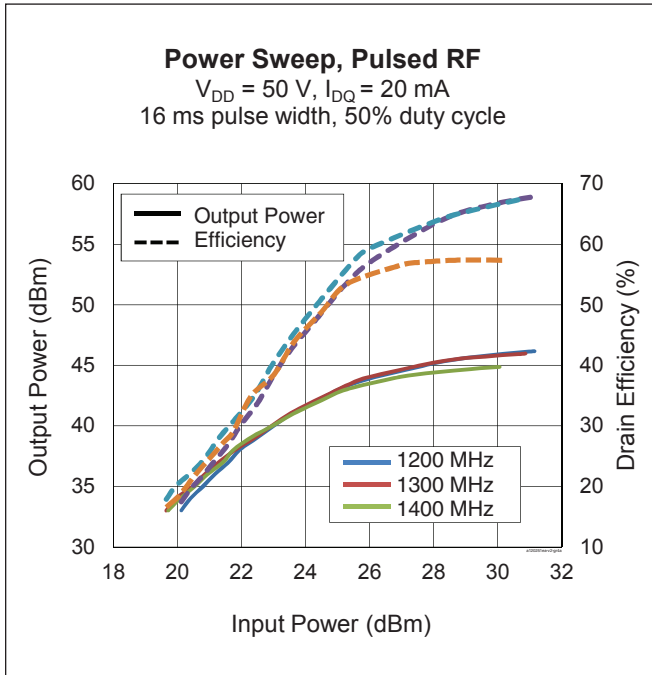


**Typical RF Performance** (tested with LTN/PTVA120251EA E4 test fixture, 960 MHz – 1215 MHz)

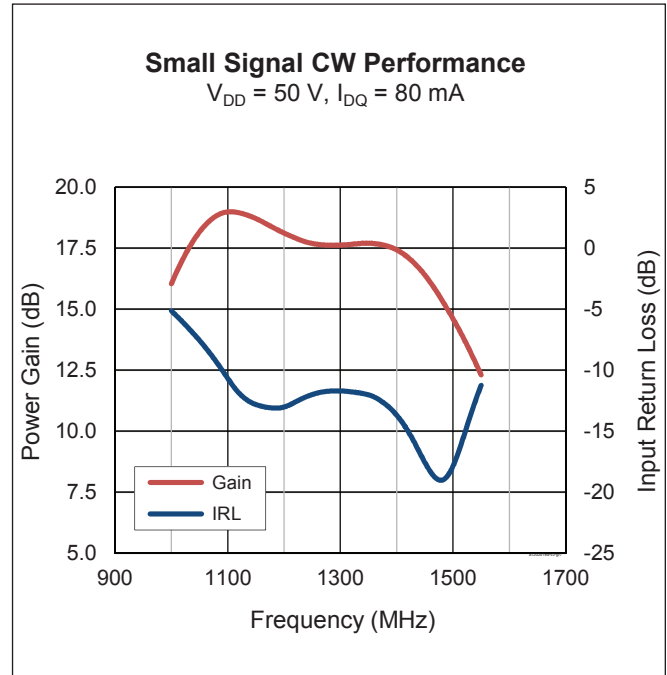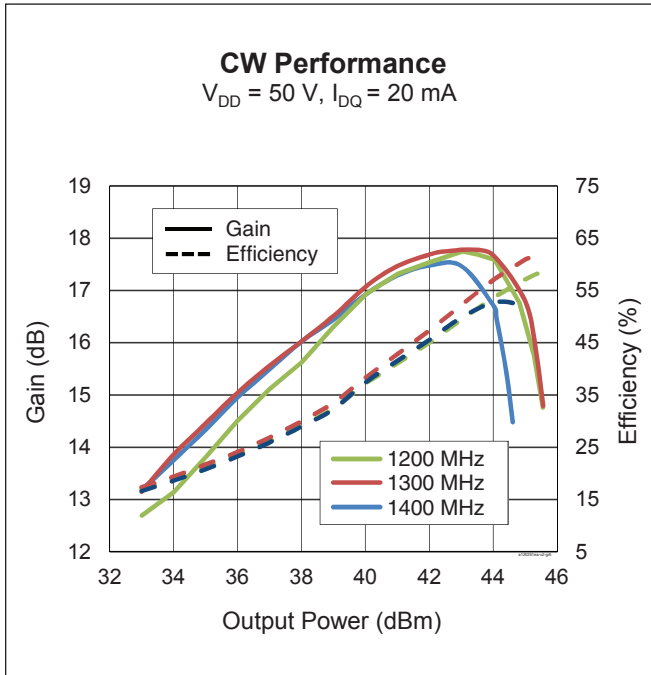

See next page for further performance characterization




**Typical RF Performance** (cont.) (tested with LTN/PTVA120251EA E4 test fixture, 960 MHz – 1215 MHz)

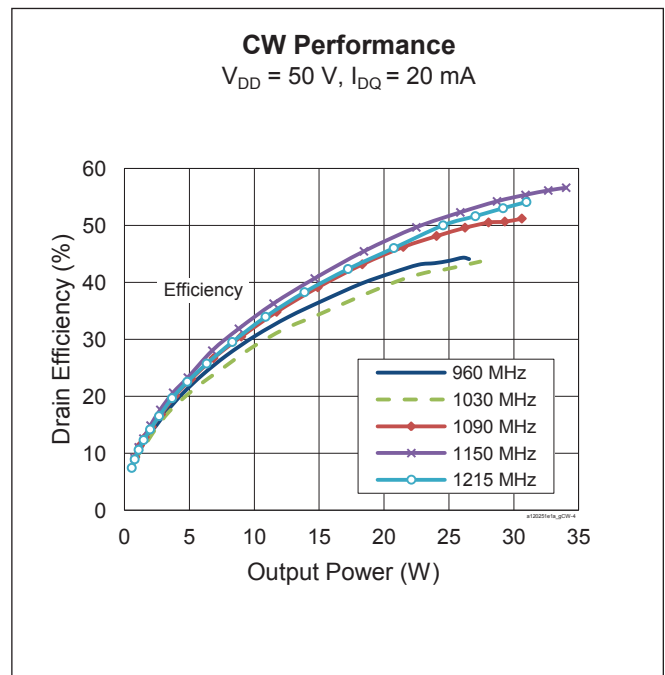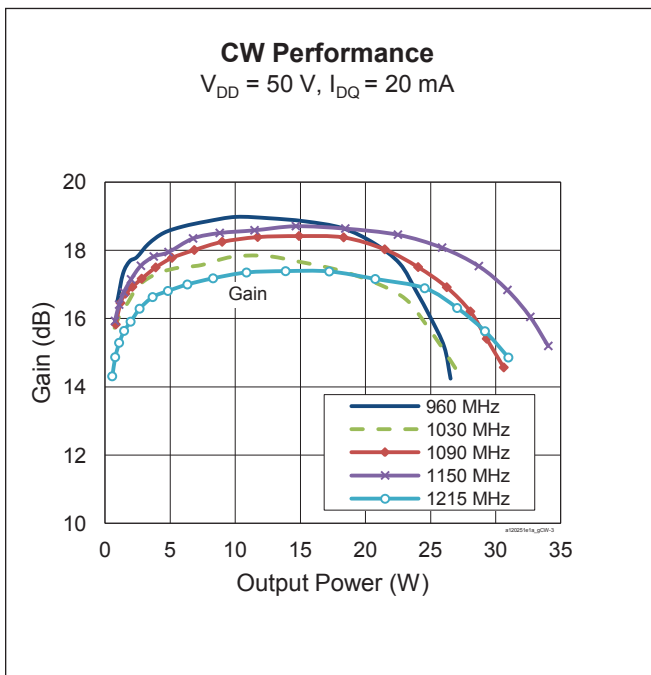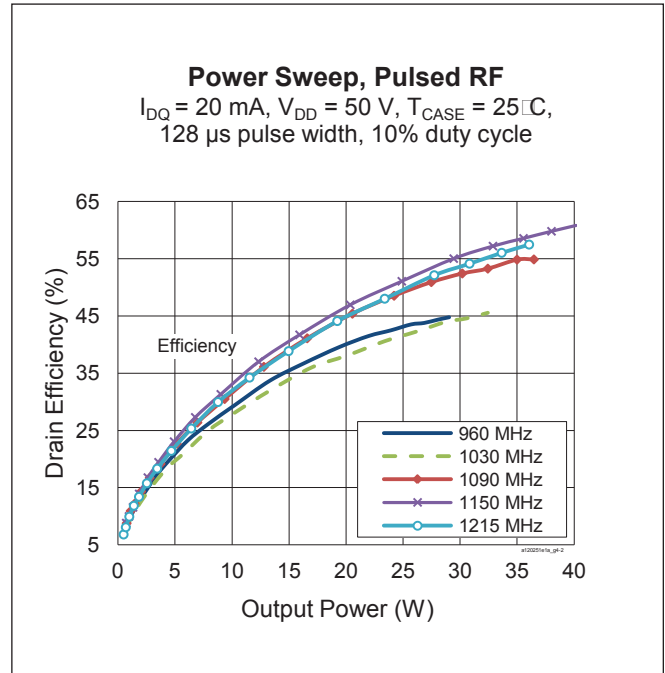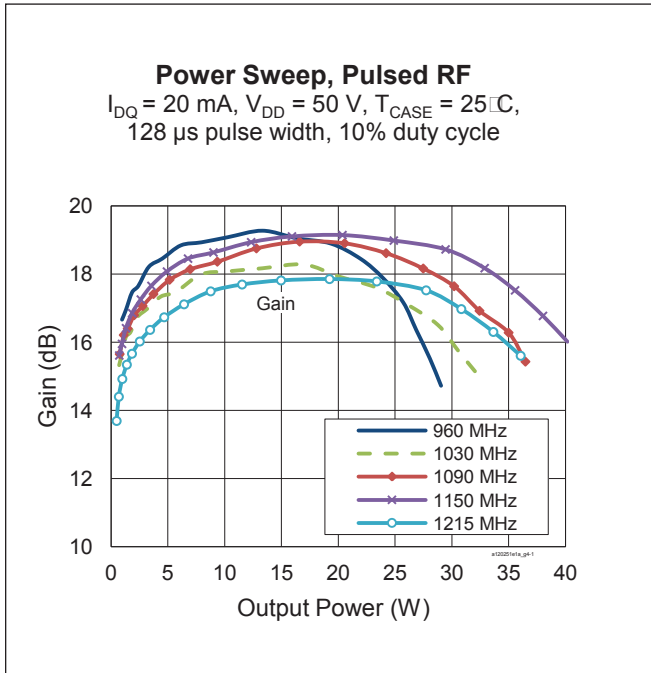




**Typical RF Performance** (cont.) (tested with LTN/PTVA120251EA E3 test fixture, 470 MHz – 860 MHz)

Test Conditions: DVB-T 8 MHz unclipped input signal, output PAR measured at 0.01% point of CCDF curve, ACPR measured over 200 KHz BW at 4.1 MHz offset from carrier center frequency.

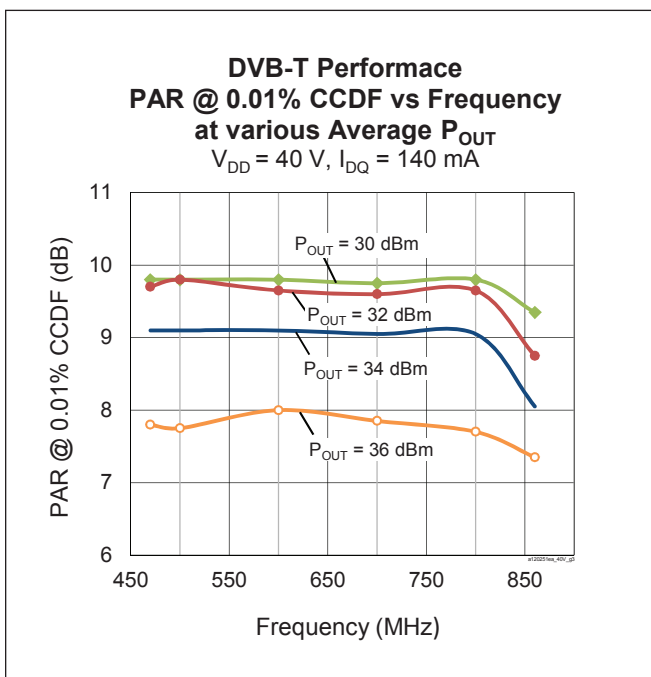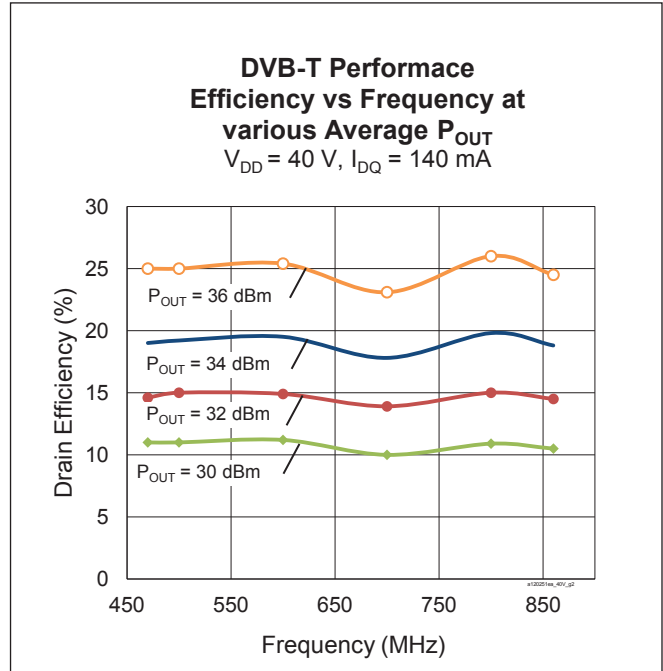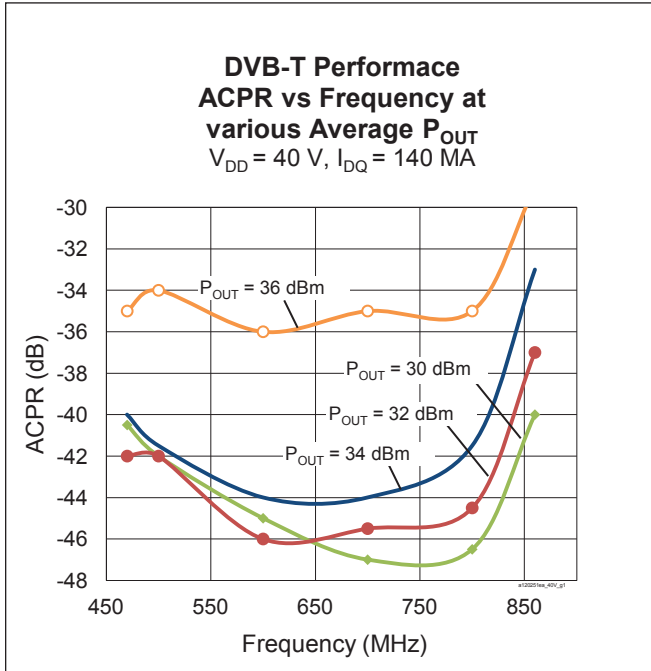

### Broadband Circuit Impedance



Freq [MHz]	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
1200	4.31	-0.22	6.46	7.63
1300	5.06	-0.79	6.29	7.27
1400	4.94	-1.96	6.14	8.72


See next page for reference circuit information

Reference Circuits

DUT	Test Fixture Part No.	PCB	Frequency (MHz)
PTVA120251EA	LTN/PTVA120251EA V2 *	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1200 – 1400
PTVA120251EA	LTN/PTVA120251EA E2 †	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1200 – 1400
PTVA120251EA	LTN/PTVA120251EA E3 †	Rogers 4350B, 0.762mm [.030"] thick, 2 oz. copper, $\epsilon_r = 3.48$	470 – 860
PTVA120251EA	LTN/PTVA120251EA E4 †	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	960 – 1215

\* See pages 11 – 12 for assembly information. Find Gerber files for this reference circuit on the Infineon Web site at [www.infineon.com/rfpower](http://www.infineon.com/rfpower)

† Gerber files for this reference circuit are available on request.

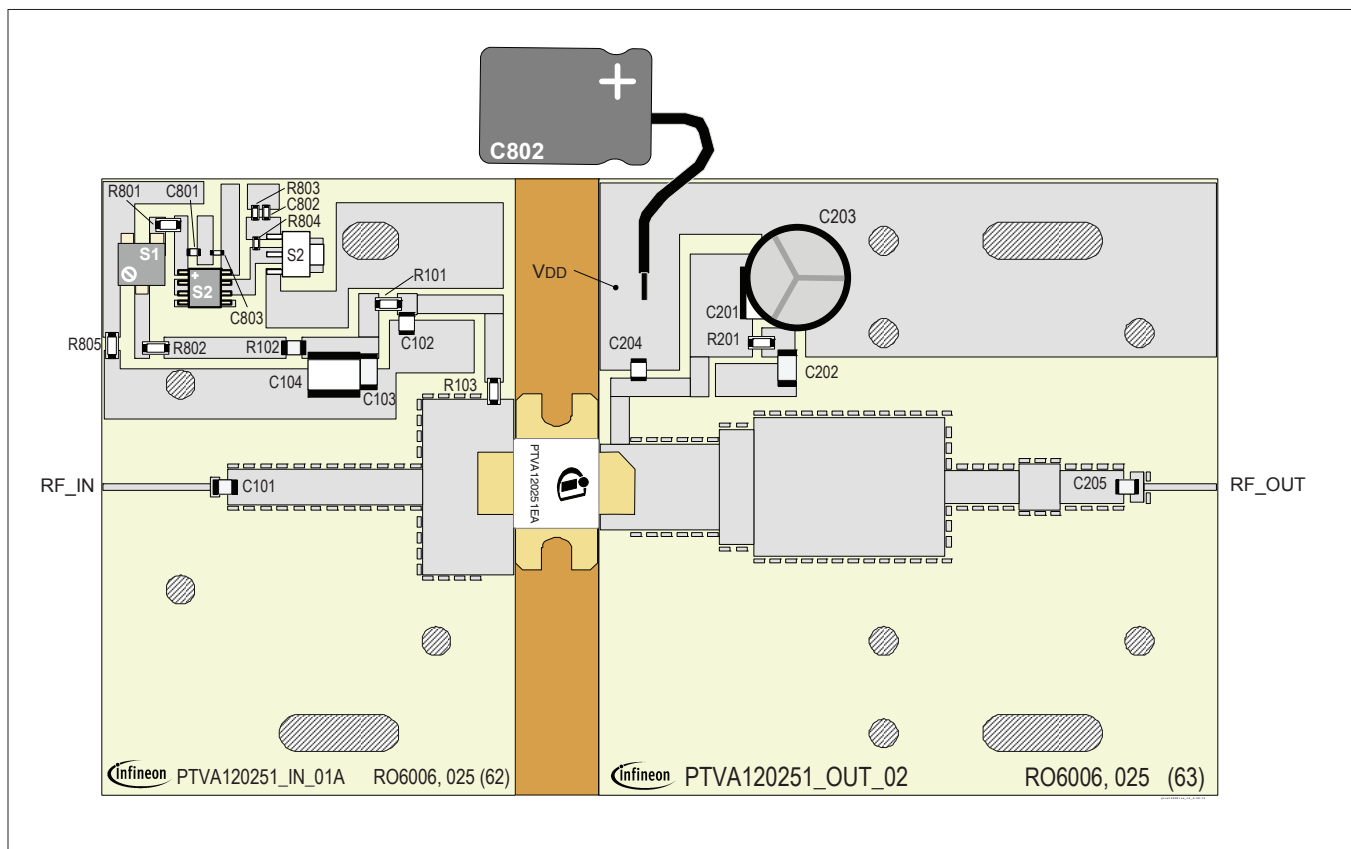


Assembly diagram for reference circuit LTN/PTVA120251EA V2, 1200 MHz to 1400 MHz (not to scale)

**Reference Circuit** (cont.)

**Components Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101, C102	Capacitor, 56 pF	ATC	ATC100B560JW500XB
C103	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C104	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C801, C802, C803	Capacitor, 1000 pF	Kemet	C1812C560KHGACTU
R101	Resistor, 5.6 ohms	Panasonic Electronic Components	ERJ-8RQJ5R6V
R102	Resistor, 0 ohms	Panasonic Electronic Components	ERJ-8RQJ5R6V
R103, R801	Resistor, 10 ohms	Panasonic – ECG	ERJ-3GEYJ100V
R802, R805	Resistor, 2K ohms	Panasonic Electronic Components	ERJ-8GEYJ202V
R803	Chip resistor, 1.3K ohms	Panasonic Electronic Components	ERJ-3GEYJ132V
R804	Chip resistor, 1.2K ohms	Panasonic Electronic Components	ERJ-3GEYJ122V
S1	Potentiometer 2K ohms	Bourns Inc.	3224W-1-202E
S2	Voltage regulator	Fairchild Semiconductor	LM7805
S3	Transistor	Fairchild Semiconductor	BCP56
<b>Output</b>			
C201	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C202	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C203	Capacitor, 100 $\mu$ F	Cornell Dubilier Electronics	SK101M100ST
C204, C205	Capacitor, 56 pF	ATC	ATC100B560JW500XB
C206	Capacitor, 6800 $\mu$ F	Panasonic Electronic Components	ECO-S2AP682EA
R101	Resistor, 5.6 ohms	Panasonic Electronic Components	ERJ-8GEYJ5R6V

## Package Outline Specifications

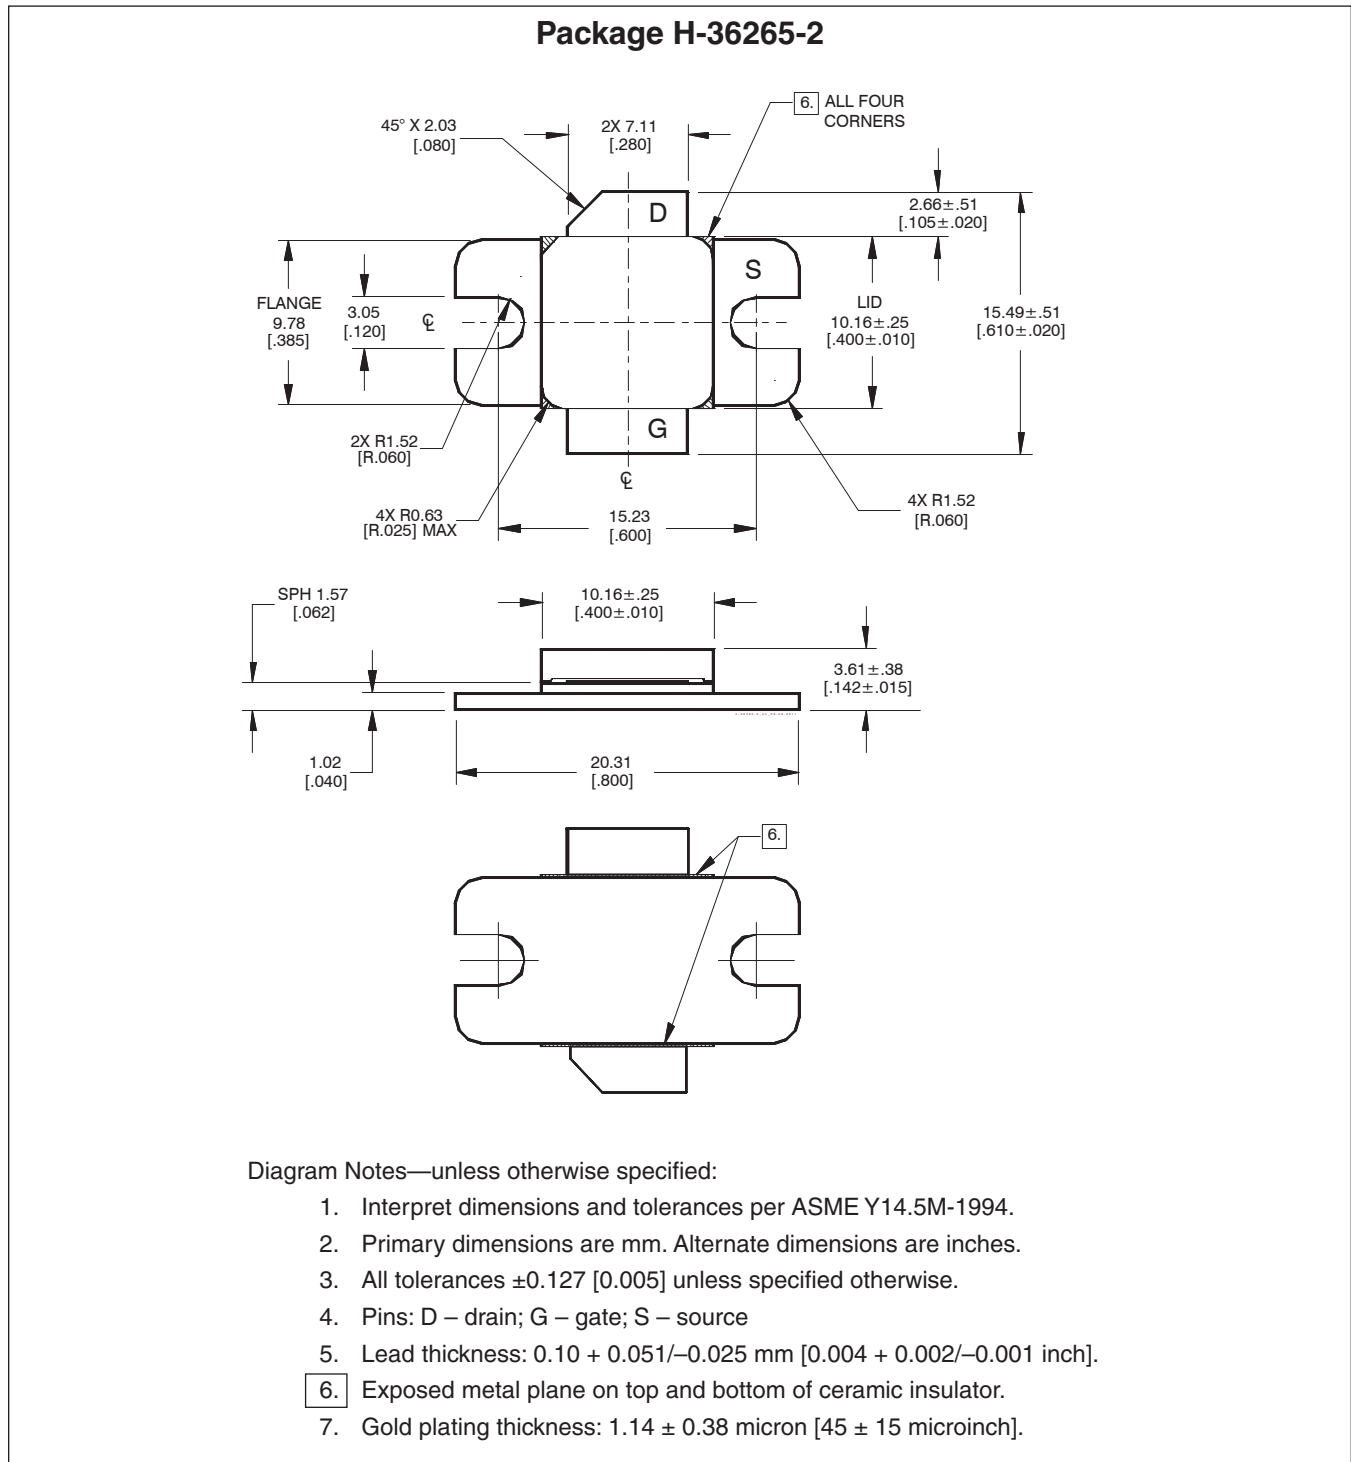

Find the latest and most complete information about products and packaging at the Infineon Internet page  
<http://www.infineon.com/rfpower>

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2012-06-04	Preliminary	All	First release of Data Sheet for pre-production product
02	2012-10-29	Preliminary	6	Add DVB-T performance graphs
03	2013-03-25	Production	All 1 – 2 3 – 8 9 – 11	Data Sheet reflects released product specifications and performance Update tables with current data Add further graphs Add load pull performance and reference circuit information
04	2014-10-03	Production	11 – 12 1, 3 – 7	New circuit design. Characterization in new circuit.
04.1	2015-06-15	Production	2	Updated max of IRL in pulsed RF performance table

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:

+1 877 465 3667 (1-877-GO-LDMOS) USA

or +1 408 776 0600 International



**Edition 2014-06-15**

**Published by**

**Infineon Technologies AG**

**85579 Neubiberg, Germany**

**© 2012 Infineon Technologies AG**

**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.