

AVO100-48S1V8

72 Watts

Eighth-brick Converter

Total Power: 72 Watts
Input Voltage: 36 to 75 Vdc
of Outputs: Single

Special Features

- Delivering up to 40A output
- Ultra-high efficiency 91.3% typ. at half load
- Wide input range: 36V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Intended for reflow or wave soldering
- RoHS 6 compliant
- Remote control function
- Remote output sense
- Trim function: 80% ~ 110%
- Input under voltage lockout
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Industry standard eighth-brick pin-out outline
- Pin length option: 3.8mm

Safety

IEC/EN/UL/ 60950-1
CE Mark
UL/TUV
GB4943



Product Descriptions

The AVO100-48S1V8 is a single output DC/DC converter with standard eighth-brick form factor and pin configuration. It delivers up to 40A output current with 1.8V output. Ultra-high 91.3% efficiency and excellent thermal performance makes it an ideal choice for use in datacom and telecommunication applications and can operate over an ambient temperature range of -40 °C ~ +85 °C.

Applications

Telecom/ Datacom

Model Numbers

| Standard | Output Voltage | Structure | Remote ON/OFF logic | RoHS Status |
|--------------------|----------------|------------|---------------------|-------------|
| AVO100-48S1V8-6L | 1.8Vdc | Open-frame | Negative | R6 |
| AVO100-48S1V8P-6L | 1.8Vdc | Open-frame | Positive | R6 |
| AVO100-48S1V8B-6L | 1.8Vdc | Baseplate | Negative | R6 |
| AVO100-48S1V8PB-6L | 1.8Vdc | Baseplate | Positive | R6 |

Ordering information

| | | | | | | | | | |
|--------|---|----|---|-----|---|---|---|---|---|
| AVO100 | - | 48 | S | 1V8 | P | B | - | 6 | L |
| ① | | ② | ③ | ④ | ⑤ | ⑥ | | ⑦ | ⑧ |

| | | |
|---|----------------------|--|
| ① | Model series | AVO: Standard eighth-brick series |
| ② | Input voltage | 48: 36V ~ 75V input range, rated input voltage 48V |
| ③ | Output number | S: single output |
| ④ | Rated output voltage | 1V8: 1.8V output |
| ⑤ | Remote ON/OFF logic | Default: negative logic; P: positive logic |
| ⑥ | Baseplate | B: with baseplate; default: open-frame |
| ⑦ | Pin length | 6: 3.8mm pin length |
| ⑧ | RoHS status | Y: Rohs, R5; L: RoHS, R6 |

Options

None

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

| Parameter | Model | Symbol | Min | Typ | Max | Unit |
|--------------------------------|-----------------------|--------------------|------|-----|------|------|
| Input Voltage | Operating -Continuous | All | - | - | 80 | Vdc |
| | Non-operating -100mS | All | - | - | 100 | Vdc |
| Maximum Output Power | All | $P_{O,max}$ | - | - | 72 | W |
| Isolation Voltage ¹ | Input to outputs | Open frame modules | - | - | 2250 | Vdc |
| | Input to baseplate | Baseplate modules | - | - | 1500 | Vdc |
| | Outputs to baseplate | Baseplate modules | - | - | 750 | Vdc |
| Ambient Operating Temperature | All | T_A | -40 | - | +85 | °C |
| Storage Temperature | All | T_{STG} | -55 | - | +125 | °C |
| Voltage at remote ON/OFF pin | All | | -0.7 | - | 12 | Vdc |
| Humidity (non-condensing) | Operating | All | - | - | 95 | % |
| | Non-operating | All | - | - | 95 | % |

Note 1 - 1mA for 60s, slew rate of 2000V/10s

Input Specifications

Table 2. Input Specifications:

| Parameter | Conditions ¹ | Symbol | Min | Typ | Max | Unit |
|--|---|-------------------|-----|----------------------|-------|------------------|
| Operating Input Voltage, DC | All | $V_{IN,DC}$ | 36 | 48 | 75 | Vdc |
| Turn-on Voltage Threshold | $I_O = I_{O,max}$ | $V_{IN,ON}$ | 31 | - | 36 | Vdc |
| Turn-off Voltage Threshold | $I_O = I_{O,max}$ | $V_{IN,OFF}$ | 30 | - | 35 | Vdc |
| Lockout Voltage Hysteresis | $I_O = I_{O,max}$ | | 1 | - | 3 | V |
| Maximum Input Current ($I_O = I_{O,max}$) | $V_{IN,DC} = 36V_{DC}$ | $I_{IN,max}$ | - | - | 3.5 | A |
| No Load Input Current (V_O On, $I_O = 0A$, $I_{VSB} = 0A$) | $V_{IN,DC} = 36V_{DC}$ | I_{IN,no_load} | - | 0.05 | - | A |
| Standby Input Current | $V_{IN,DC} = 36V_{DC}$ | $I_{IN,standby}$ | - | 0.005 | 0.015 | A |
| Inrush Current Transient Rating | | | - | - | 1 | A ² S |
| Recommended Input Fuse | Fast blow external fuse recommended | | - | - | 10 | A |
| Recommended External Input Capacitance | Low ESR capacitor recommended | C_{IN} | 100 | - | - | uF |
| Input Reflected Ripple Current | Through 12uH inductor | | - | - | 40 | mA |
| Operating Efficiency | $T_A = 25^\circ C$ $I_O = I_{O,max}$ $I_O = 50\% I_{O,max}$ $I_O = 20\% I_{O,max}$ | η | - | 88.5 91.3 88.5 | - | % % % |

Note 1 - $T_a = 25^\circ C$, airflow rate = 400 LFM, $V_{in} = 48V_{dc}$, nominal V_{out} unless otherwise noted.

Output Specifications

Table 3. Output Specifications:

| Parameter | Condition ¹ | Symbol | Min | Typ | Max | Unit | |
|--|---|---|---------------|------|-------|---------------------|----|
| Factory Set Voltage | $V_{IN,DC} = 48V_{DC}$ $I_O = I_{O,max}$ | V_O | 1.77 | 1.80 | 1.83 | Vdc | |
| Total Regulation | Inclusive of line, load temperature change, warm-up drift | V_O | 1.73 | 1.80 | 1.87 | Vdc | |
| Output Voltage Line Regulation | All | $\pm\%V_O$ | - | 0.1 | 0.2 | % | |
| Output Voltage Load Regulation | All | $\pm\%V_O$ | - | 0.1 | 0.5 | % | |
| Output Voltage Temperature Regulation | All | $\pm\%V_O$ | - | - | 0.02 | %/°C | |
| Output Voltage Trim Range | All | V_O | 1.44 | - | 1.98 | V | |
| Output Ripple, pk-pk | Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | 55 | - | mV _{PK-PK} | |
| Output Current | All | I_O | 0 | - | 40 | A | |
| Output DC current-limit inception ² | All | I_O | 42 | - | 55 | A | |
| V_O Load Capacitance ³ | All | C_O | 330 | - | 40000 | uF | |
| V_O Dynamic Response | Peak Deviation Settling Time | 25%~50%~25% 25% load change slew rate = 0.1A/us | $\pm V_O$ | - | 30 | - | mV |
| | | T_s | - | 80 | - | uSec | |
| Turn-on transient | Rise time | $I_O = I_{max}$ | T_{rise} | - | 5 | 50 | mS |
| | Turn-on delay time | $I_O = I_{max}$ | $T_{turn-on}$ | - | 62 | 200 | mS |
| | Output voltage overshoot | $I_O = 0$ | $\%V_O$ | - | 0 | - | % |
| Switching frequency | All | f_{SW} | - | 165 | - | KHz | |
| Remote ON/OFF control (Positive logic) | Off-state voltage | All | -0.7 | - | 1.2 | V | |
| | On-state voltage | All | 3.5 | - | 12 | V | |
| Remote ON/OFF control (Negative logic) | Off-state voltage | All | 3.5 | - | 12 | V | |
| | On-state voltage | All | -0.7 | - | 1.2 | V | |

Note 1 - $T_a = 25^\circ C$, airflow rate = 400 LFM, $V_{in} = 48V_{dc}$, nominal V_{out} unless otherwise noted.

Note 2 - Hiccup: auto-restart when over-current condition is removed.

Note 3 - High frequency and low ESR is recommended.

Output Specifications

Table 3. Output Specifications, con't:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit |
|---|---|--------|------|-----|------|-------------------|
| Output voltage remote sense range | All | V_O | - | - | 0.12 | V |
| Output over-voltage protection ⁴ | All | V_O | 2.15 | - | 3.1 | V |
| Output over-temperature protection ⁵ | | | | | | |
| With baseplate | All | T | - | 115 | - | °C |
| Without baseplate | All | T | - | 120 | - | °C |
| Over-temperature hysteresis | All | T | - | 5 | - | °C |
| MTBF | Telcordia SR-332-2006; 80% load, 300LFM, 40 °C T _A | | - | 1.5 | - | 10 ⁶ h |

Note 4 - Hiccup: auto-restart when over-voltage condition is removed.

Note 5 - Auto recovery. See Figure 10,11 test point.

AVO100-48S1V8 Performance Curves

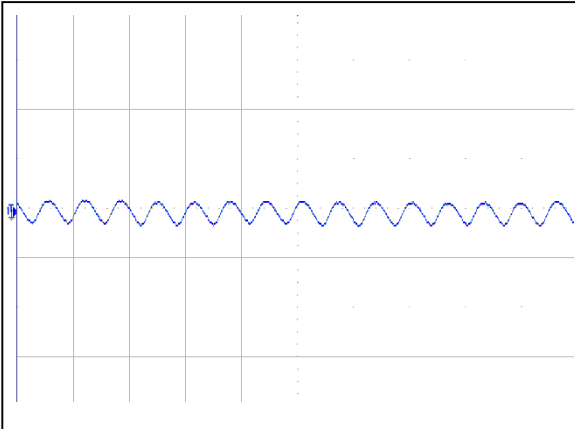


Figure 1: AVO100-48S1V8 Input Reflected Ripple Current Waveform
Ch 1: Iin (5 μ S/div, 10mA/div)

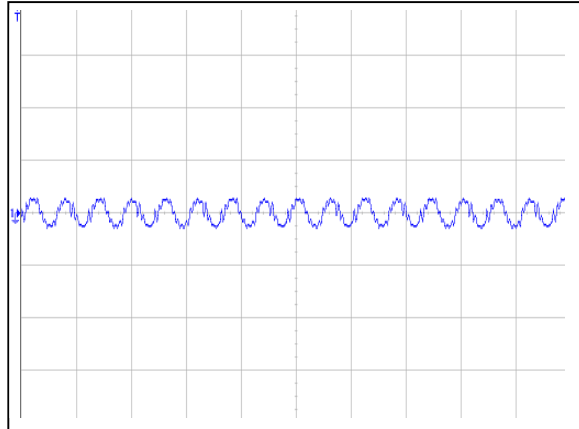


Figure 2: AVO100-48S1V8 Ripple and Noise Measurement
Ch 1: Vo (5 μ S/div, 50mV/div)

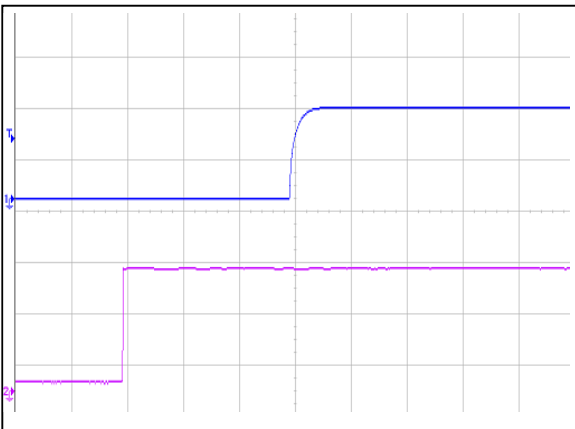


Figure 3: AVO100-48S1V8 Output Voltage Startup Characteristic (50mS/div)
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

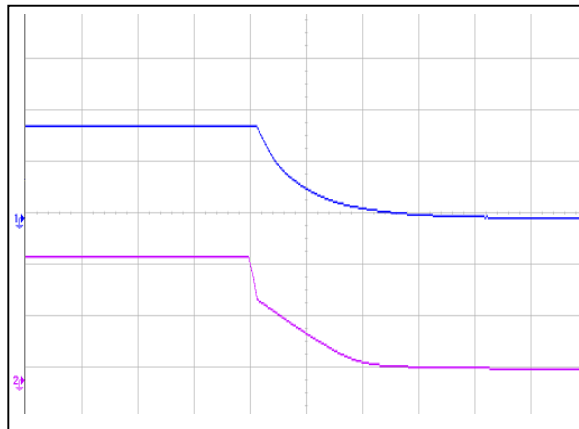


Figure 4: AVO100-48S1V8 Turn Off Characteristic (100mS/div)
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

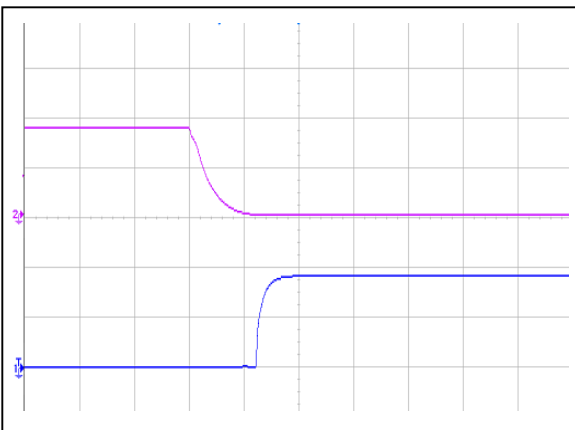


Figure 5: AVO100-48S1V8 Remote ON Waveform (20mS/div) Negative
Ch 1: Vo (1V/div) Ch 2: Remote ON (2V/div)

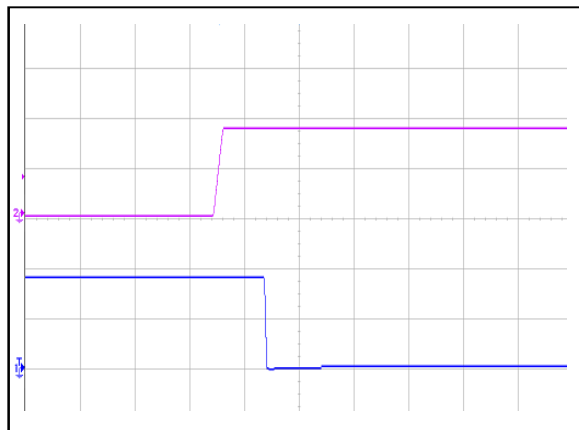


Figure 6: AVO100-48S1V8 Remote OFF Waveform (20mS/div) Negative
Ch 1: Vo (1V/div) CH3: Remote OFF (2V/div)

AVO100-48S1V8 Performance Curves

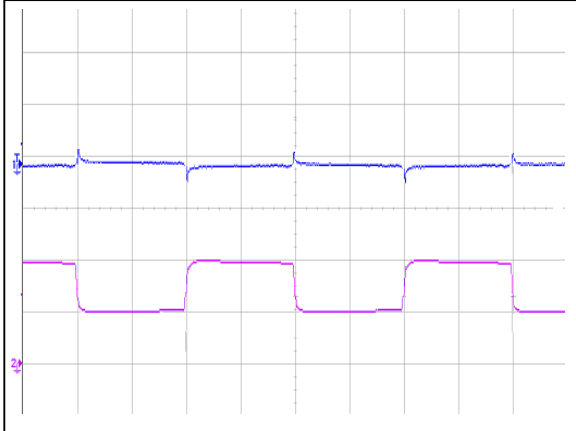


Figure 7: AVO100-48S1V8 Transient Response (2mS/div)
 25%~50%~25% load change, 0.1A/uS slew rate
 Ch 1: Vo (50mV/div) Ch 2: Io (10A/div)

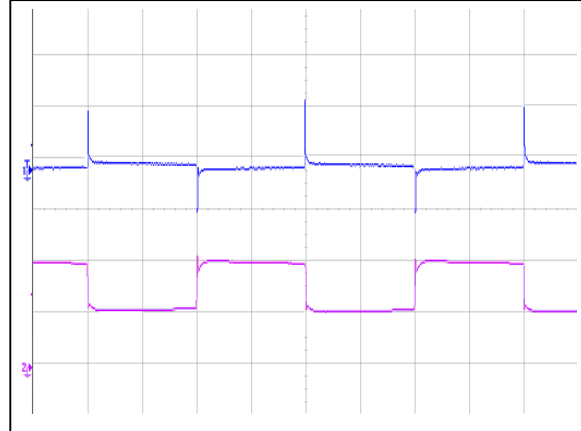


Figure 8: AVO100-48S1V8 Transient Response (2mS/div)
 25%~50%~25% load change, 1A/uS slew rate
 Ch 1: Vo (50mV/div) Ch 2: Io (10A/div)

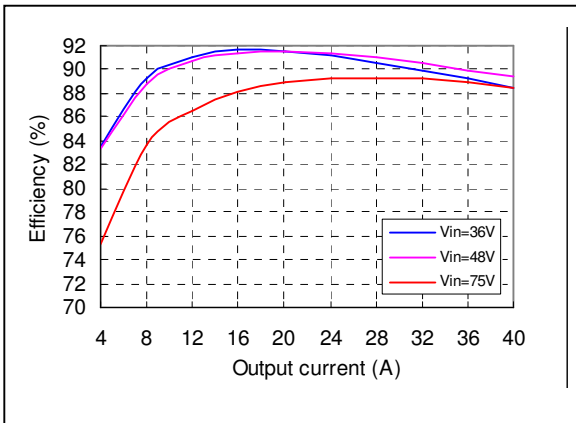


Figure 9: AVO100-48S1V8 Efficiency Curves @ 25 °C
 Loading: Io = 10% increment to 40A

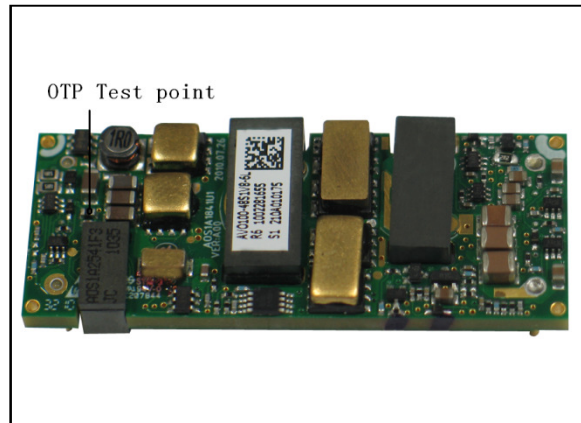


Figure 10: AVO100-48S1V8 OTP Test Point


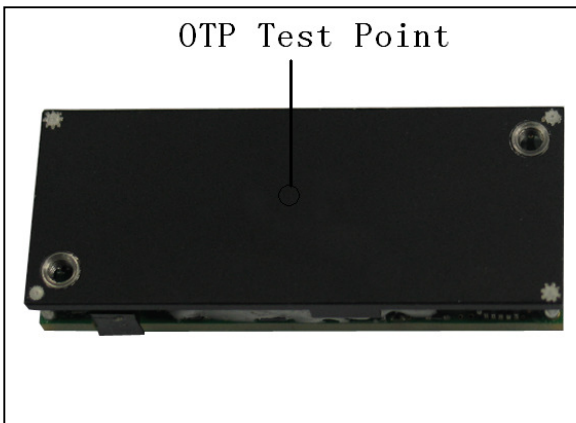


Figure 11: AVO100-48S1V8B OTP Test Point

Mechanical Specifications

Mechanical Outlines – Open-Frame Module

AVO100-48S1V8

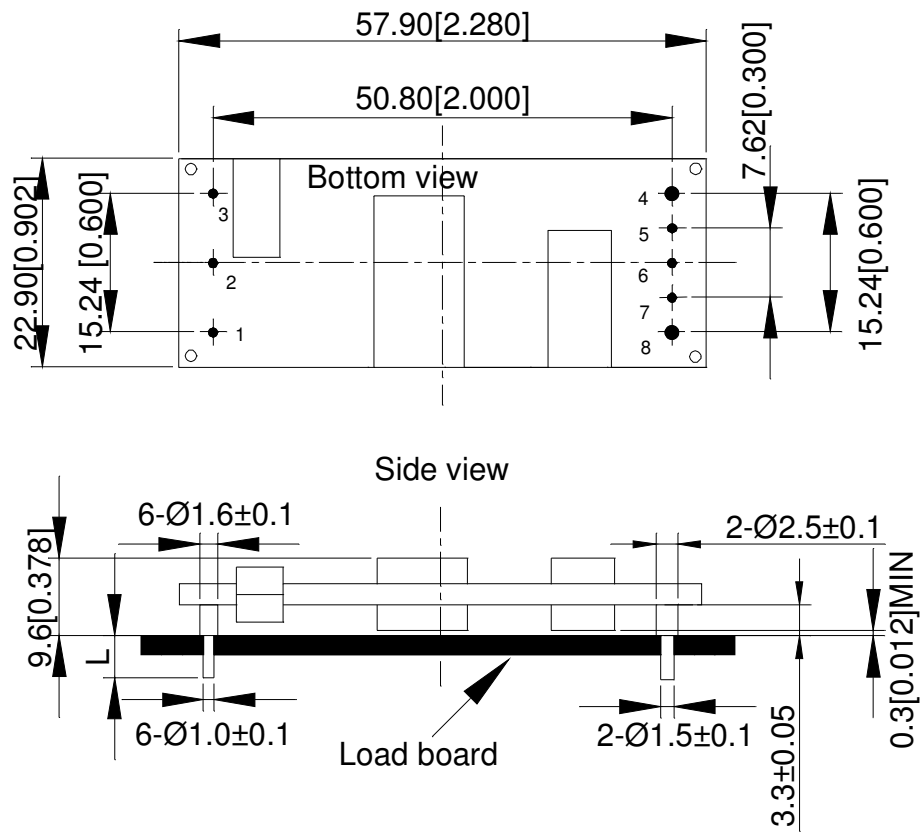

Unit: mm[inch]


Bottom view: pin on upside

Tolerance: X.Xmm \pm 0.5mm[X.X in. \pm 0.02in.]

X.XXmm \pm 0.25mm[X.XX in. \pm 0.01in.]

Mechanical Outlines – Baseplate Module

AVO100-48S1V8B

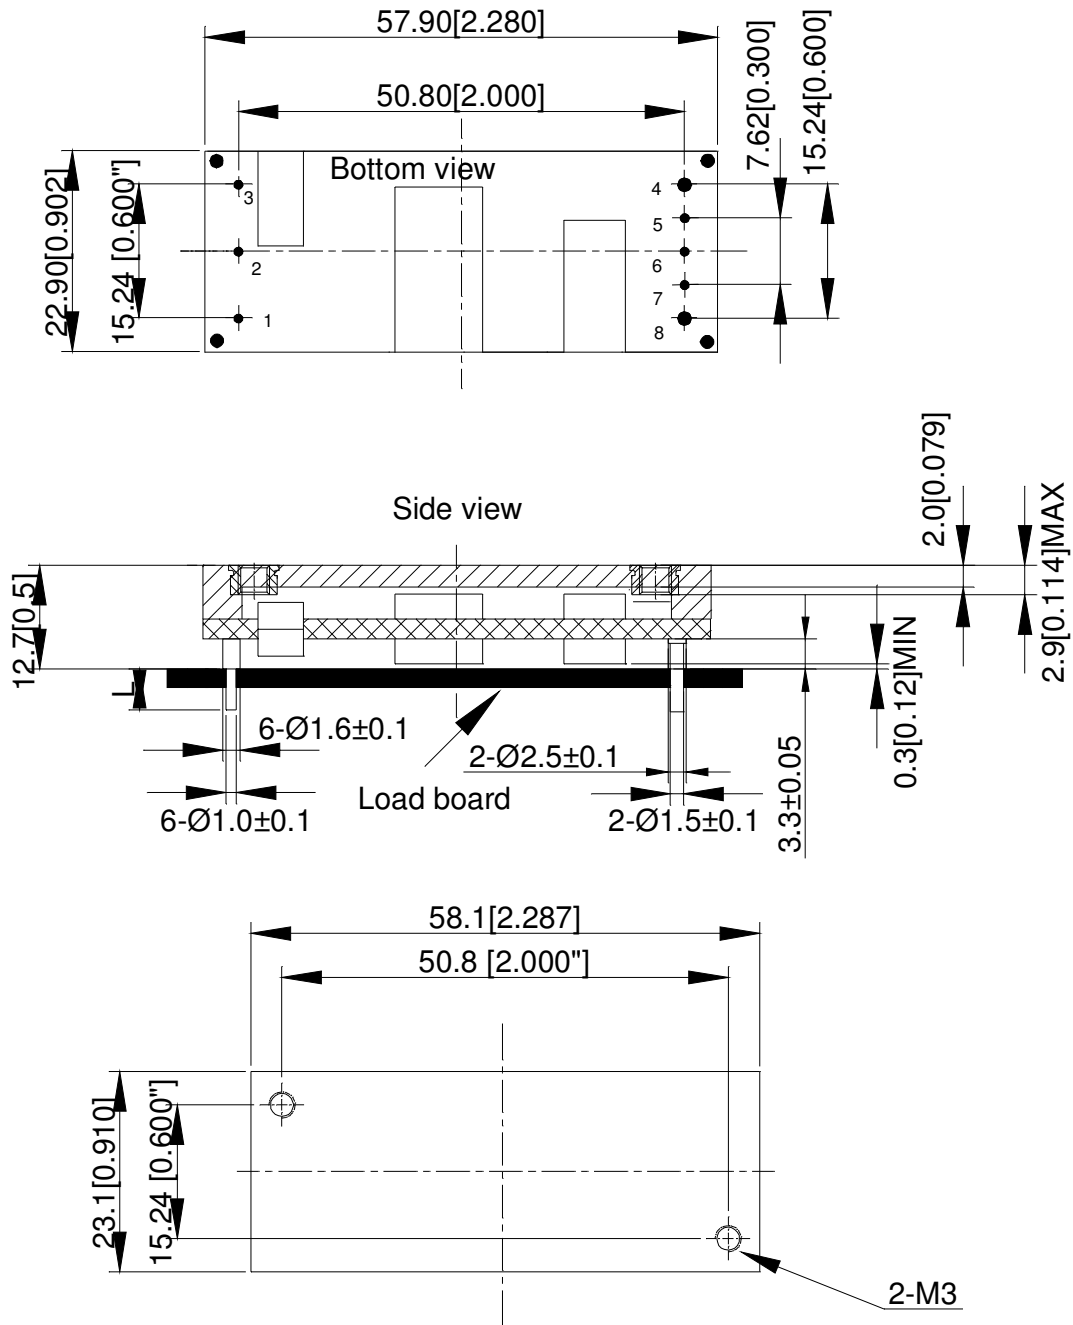

Unit: mm[inch]

Bottom view: pin on upside

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin Length Option

| Device code suffix | L |
|--------------------|-----------------|
| -4 | 4.8mm ± 0.25 mm |
| -6 | 3.8mm ± 0.25 mm |
| -8 | 2.8mm ± 0.25 mm |
| None | 5.8mm ± 0.25 mm |

Pin Designations

| Pin No | Name | Function |
|--------|---------------|-------------------------|
| 1 | Vin+ | Positive input voltage |
| 2 | Remote On/Off | Remote control |
| 3 | Vin- | Negative input voltage |
| 4 | Vo- | Negative output voltage |
| 5 | S- | Negative remote sense |
| 6 | Trim | Output voltage trim |
| 7 | S+ | Positive remote sense |
| 8 | Vo+ | Positive output voltage |

Environmental Specifications

EMC Immunity

AVO100-48S1V8 power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications:

| Document | Description | Criteria |
|---------------------------|---|----------|
| EN55022, Class A Limits | Conducted and Radiated EMI Limits | / |
| IEC/EN 61000-4-2, Level 3 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques - Electrostatic discharge immunity test. Enclosure Port | B |
| IEC/EN 61000-4-6, Level 2 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Continuous Conducted Interference. DC input port | A |
| IEC/EN 61000-4-4, Level3 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Electrical Fast Transient. DC input port. | B |
| IEC/EN 61000-4-5 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Immunity to surges - 600V common mode and 600V differential mode for DC ports | B |
| EN61000-4-29 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Voltage Dips and short interruptions and voltage variations. DC input port | B |

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

Recommend EMC Filter Configuration

See Figure 17

Safety Certifications

The AVO100-48S1V8 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVO100-48S1V8 power supply system

| Document | File # | Description |
|-----------------|---------------|----------------------------|
| UL/CSA 60950 | | US and Canada Requirements |
| EN60950 | | European Requirements |
| IEC60950 | | International Requirements |
| GB4943 | | China Requirements |
| CE | | CE Marking |

Operating Temperature

The AVO100 series power supplies will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C.

Thermal Considerations – Open-Frame module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points as shown in the Figure 12. The temperature at these test points should not exceed the maximum values in Table 6.

For a typical application, forced airflow direction is from Vin- to Vin+, Figure 13 shows the derating of output current vs. ambient air temperature at different air velocity.

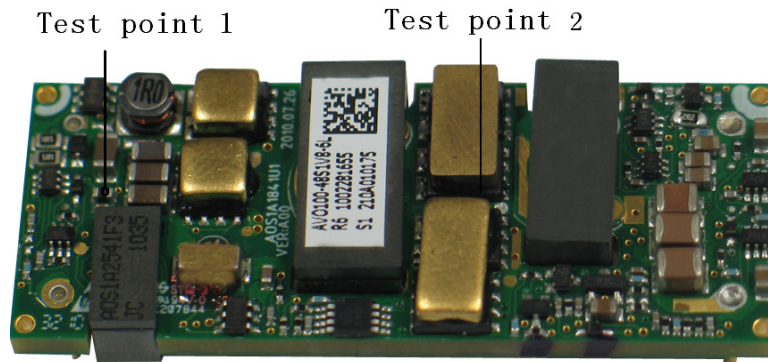


Figure 12 Temperature test point

Table 6. Temperature limit of the test point

| Test Point | Temperature Limit |
|--------------|-------------------|
| Test point 1 | 114 °C |
| Test point 2 | 130 °C |

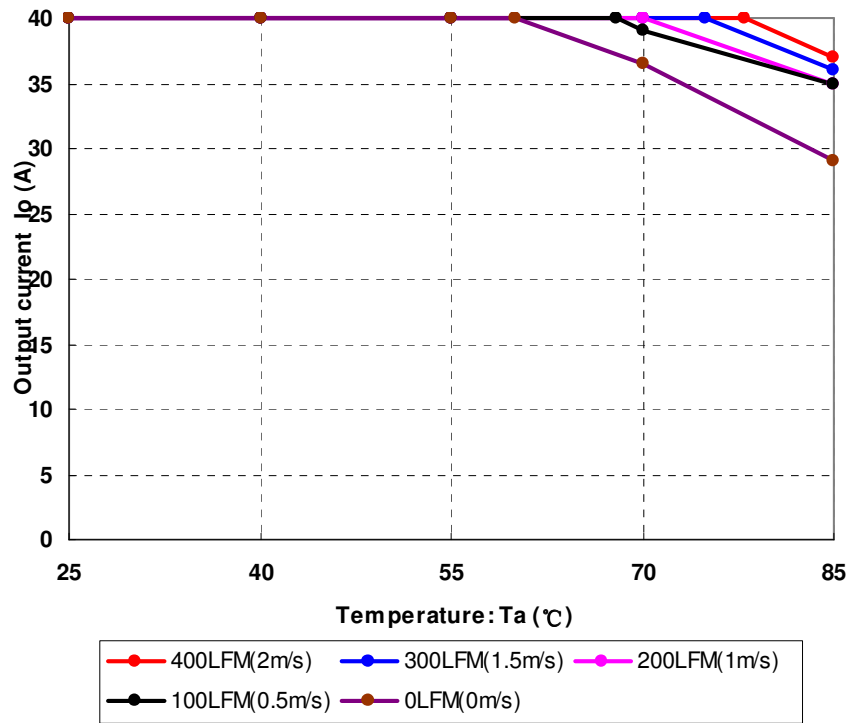


Figure 13 Output power derating, 48Vin, air flowing across the converter from Vin- and Vin+

Thermal Considerations –Baseplate module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points. The temperature at these points should not exceed the maximum values in Table 7.

For a typical application, forced airflow direction is from Vin- to Vin+, Figure 16 shows the derating of output current vs. ambient air temperature at different air velocity.

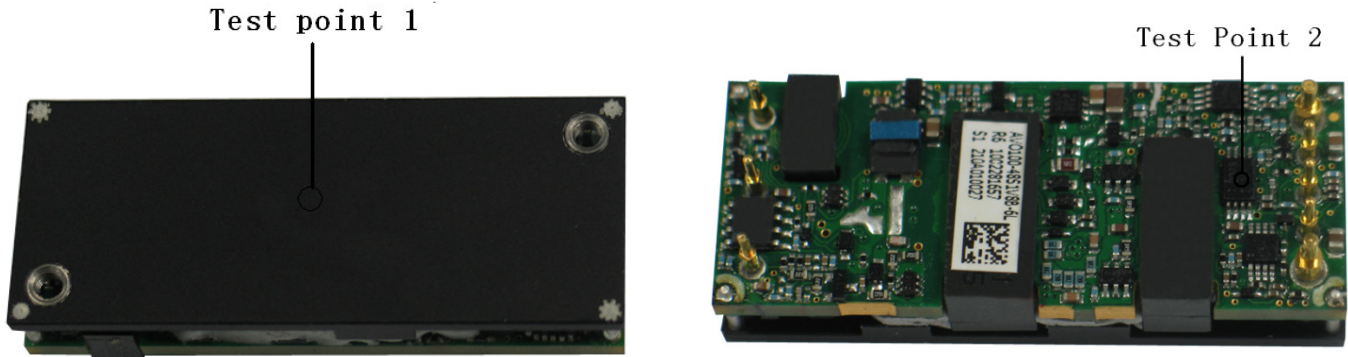


Figure 14 Temperature test point

Table 7. Temperature limit of the test point

| Test Point | Temperature Limit |
|--------------|-------------------|
| Test point 1 | 112 °C |
| Test point 2 | 114 °C |

The converter can also operate with a smaller heatsink and sufficient airflow. The heatsink is shown in Figure 15.

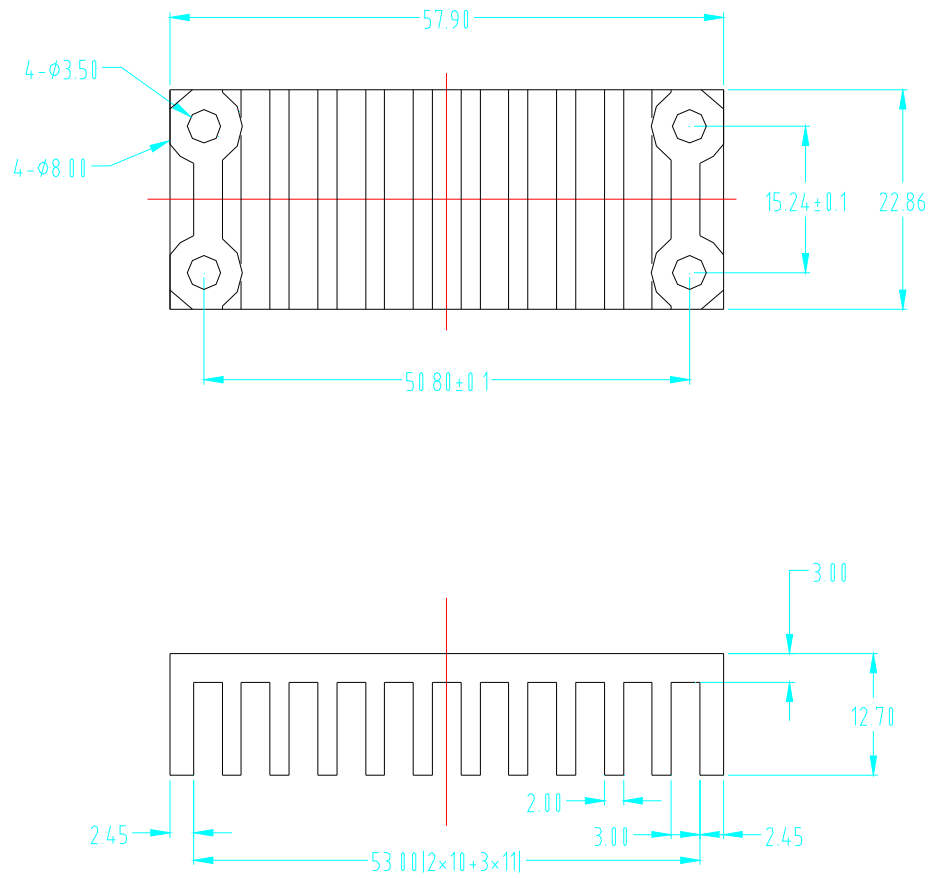


Figure 15 Heatsink (Unit:mm)

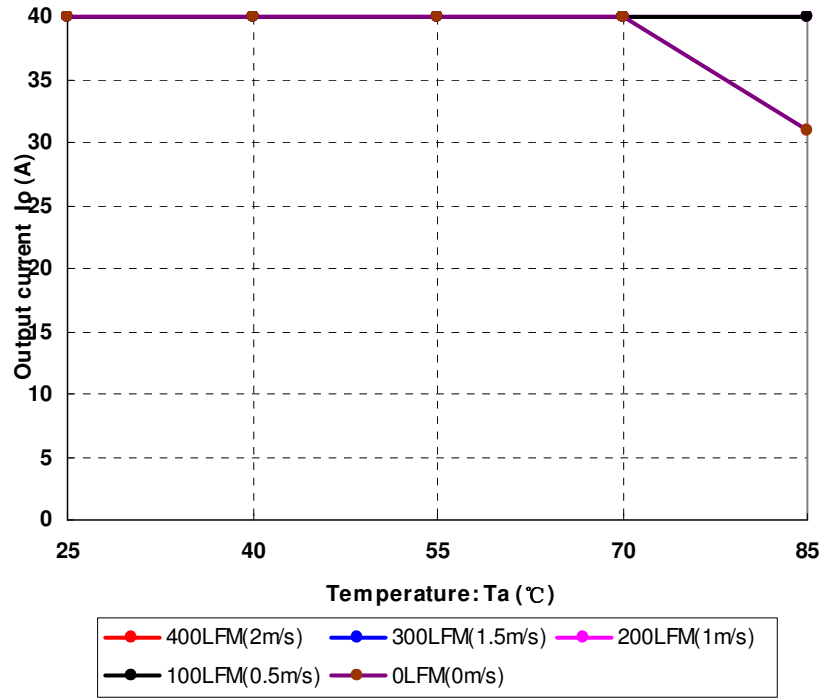


Figure 16 Output power derating, 48Vin, air flowing across the converter from Vin- and Vin+

Assembly

The maximum length of the screw driven into heat-sink is 3.3mm.

Qualification Testing

| Parameter | Unit (pcs) | Test condition |
|------------------|------------|--|
| Halt test | 4-5 | $T_{a,min} - 10\text{ }^{\circ}\text{C}$ to $T_{a,max} + 10\text{ }^{\circ}\text{C}$, $5\text{ }^{\circ}\text{C}$ step, $V_{in} = \text{min to max}$, $0 \sim 105\%$ load |
| Vibration | 3 | Frequency range: $5\text{Hz} \sim 20\text{Hz}$, $20\text{Hz} \sim 200\text{Hz}$, A.S.D: $1.0\text{m}^2/\text{s}^3$, -3db/oct , axes of vibration: X/Y/Z. Time: 30min/axis |
| Mechanical Shock | 3 | 30g , 6ms , 3axes , 6directions , 3time/direction |
| Thermal Shock | 3 | $-40\text{ }^{\circ}\text{C}$ to $100\text{ }^{\circ}\text{C}$, unit temperature 20cycles |
| Thermal Cycling | 3 | $-40\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$, temperature change rate: $1\text{ }^{\circ}\text{C/min}$, cycles: 2cycles |
| Humidity | 3 | $40\text{ }^{\circ}\text{C}$, $95\%\text{RH}$, 48h |
| Solder Ability | 15 | IPC J-STD-002C-2007 |

Application Notes

Typical Application

Below is the typical application of the AVO100-48S1V8 series power supply.

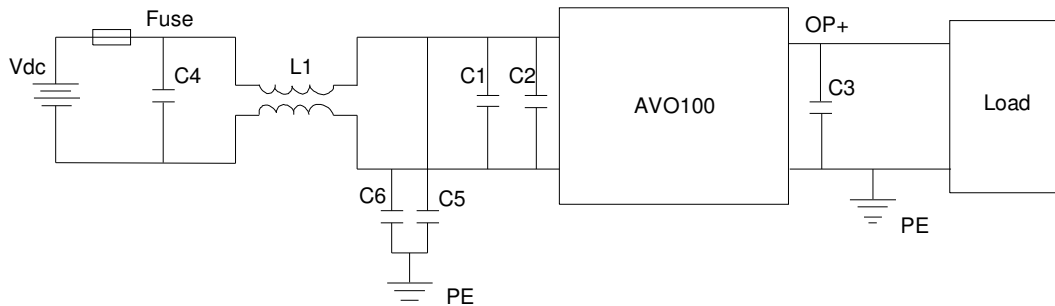


Figure 17 Typical application

Recommended input fuse: LITTLEFUSE 216010.P 10A

C4: SMD ceramic-100V-1000nF-X7R-1210

C1: SMD ceramic-100V-100nF-±10%-X7R-1206

C2: 100µF/100V electrolytic capacitor, high frequency and low ESR

C3: 1000µF/10V electrolytic capacitor, high frequency and low ESR

C5, C6: SMD ceramic-47nF/1000V/X7R-1210

L1: 1320uH-±25%-4A-R5K-21×21×12.5mm

Remote ON/OFF

Either positive or negative remote ON/OFF logic is available in AVO100-48S1V8. The logic is CMOS and TTL compatible. The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in Table 3 to ensure proper operation. The external Remote ON/OFF circuit in AVO100-48S1V8 is highly recommended as shown in Figure 18.

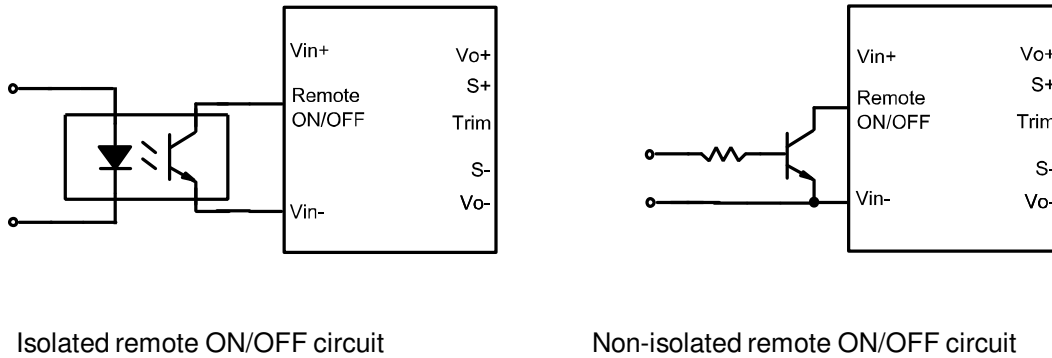


Figure 18 External Remote ON/OFF circuit

Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj_down} = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

$$R_{adj_up} = \left(\frac{5.11 V_{out} (100 + \Delta\%)}{V_{ref} \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

R_{adj_down}

Value of external adjustment resistor which shall be connected between Trim and S- for trimming down

R_{adj_up}

Value of external adjustment resistor which shall be connected between Trim and S+ for trimming up.

$\Delta\%$

Output voltage change rate against nominal output voltage.

V_{out} : Nominal output voltage.

$V_{ref} = 1.225V$

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power as shown in below figure.

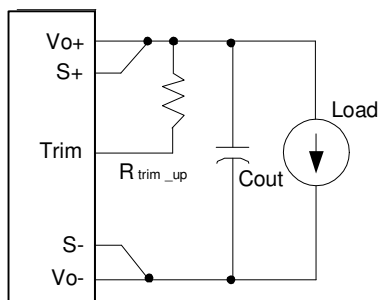


Figure 19 Trim up

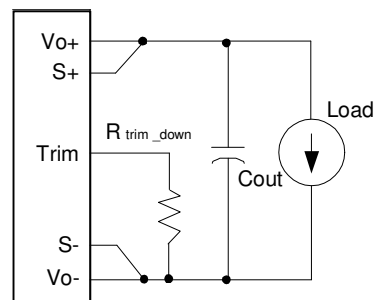


Figure 20 Trim down

Input Ripple & Inrush Current and Output Ripple & Noise Test Configuration

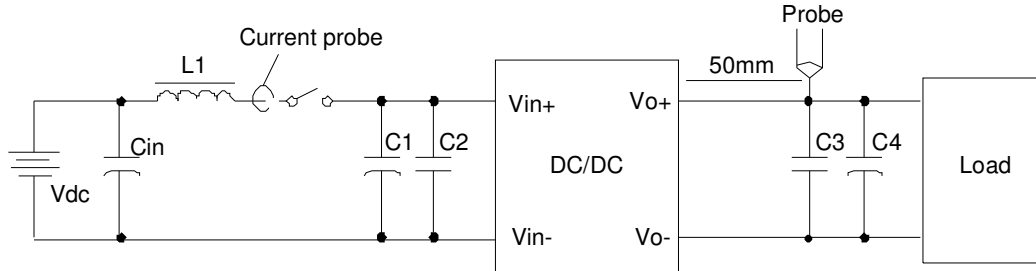


Figure 21 Input ripple & inrush current ,output ripple & noise test configuration

Vdc: DC power supply

L1: 12uH

Cin: 220uF/100V typical

C1: SMD ceramic-100V-100nF-±10%-X7R-1206

C2: 100µF/100V electrolytic capacitor, high frequency and low ESR

C3: SMD ceramic-10V-1µF-±10%-X7R-1206

C4: 1000µF/10V electrolytic capacitor, high frequency and low ESR

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended

Sense Characteristics

If the load is far from the unit, connect S+ and S- to the terminal of the load respectively to compensate the voltage drop on the transmission line.

If the sense compensate function is not necessary, connect S+ to Vo+ and S- to Vo- directly.

Soldering

√R6 Wave Soldering

The product is intended for standard manual, or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

| | Product requirement | Remark | Product Name |
|----|---------------------|--------|----------------|
| R6 | Wave soldering | 1.8V | AVO200-48S1V8B |

√R6 Reflow/Wave Soldering

The product is intended for standard manual, reflow or wave soldering.

When reflow soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 10s.

When wave soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

| | Product requirement | Remark | Product Name |
|----|---------------------|--------|---------------|
| R6 | Wave soldering | 1.8V | AVO200-48S1V8 |

Hazardous Substances Announcement (RoHS of China R6)

| Parts | Hazardous Substances | | | | | |
|----------------|----------------------|----|----|------------------|-----|------|
| | Pb | Hg | Cd | Cr ⁶⁺ | PBB | PBDE |
| AVO100-48S1V8 | x | x | x | x | x | x |
| AVO100-48S1V8B | x | x | x | x | x | x |

x: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006

√: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006

Artesyn Embedded Technologies has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution:

1. Solders (including high-temperature solder in parts) contain plumbum.
2. Glass of electric parts contains plumbum.
3. Copper alloy of pins contains plumbum

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2014 All rights reserved.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com