

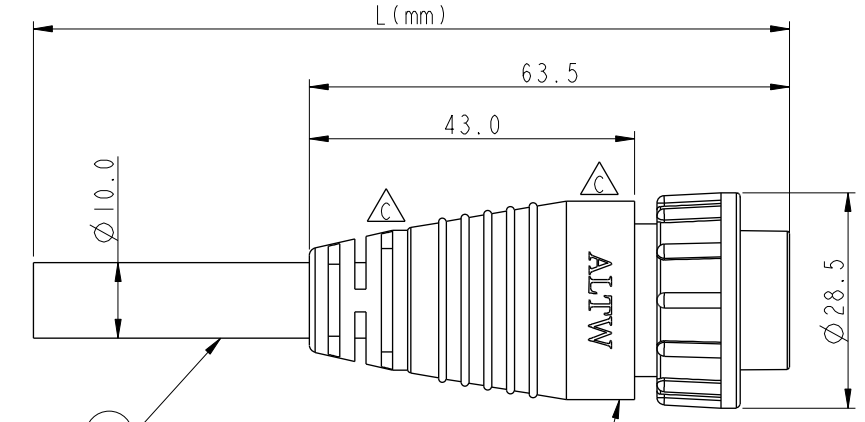



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1340046	2013-04-10	Kevin Wang	Modify Conn. of View
C	LEN1380143-146	2013-08-08	Ruru	Modify the SR & Tolerance & Change Logo




Cable (2)
Color: Black

DCU-08AFEM-LL7000 (1)
Color: Black

DCU-08AFEM-LL7BXX
 XX : 01~99Meter
 01 : 01Meter
 02 : 02Meters

 99 : 99Meters
 Cable Length(L):01~99Meters

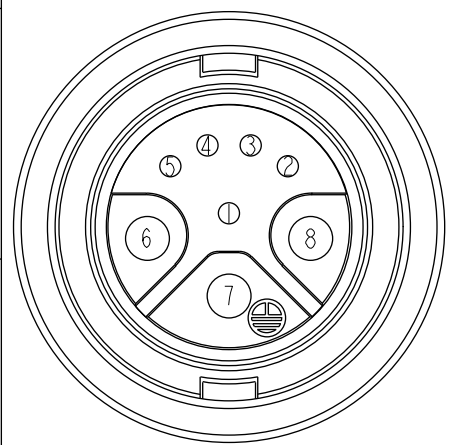

Conn.
Pin Assignments
Front View

8	Brown	16AWG	棕	Twist
7	Green/Yellow	16AWG	綠/黃	
6	Blue	16AWG	藍	Twist
5	Red	24AWG	紅	
4	Green	24AWG	綠	Twist
3	White	24AWG	白	
2	Blue	24AWG	藍	Twist
1	Drain		地線	
Conn.	Wire Color			Pin Out

Note:
 * (C) Important Dimension To Check
 * Waterproof Rate: IP67
 * Connector: Nylon+GF, Black
 * Pin: Copper Alloy, Gold Plated
 * O-Ring: Silicone, Gray
 * Lock Nut: Nylon+GF, Black
 * Cable: UL2586 (24#*1P+A)*2C+16#*3C+Drain+Al/Mylar, PVC Jacket, UV Resistant, OD=10.0mm, Black
 * Cable Length Tolerance : 01M±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm TOLERANCE ± 0.5 mm	TITLE Large Size, Lock Type FConn. 3Mpin(20A)+5FPin(2A)			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
	SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DCU-08AFEM-LL7BXX	CHECKED BY Rita	DATE 2013-08-20
	REV. C	WC-REV. C.2	(C) Inspection item		CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-08-20

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.