

NOTES:


1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
4. METAL BRACKET: STEEL; min. 320µm TIN over 80µm NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. FIXING PLATE: PBT GF UL 94 V-0, BLACK
7. PCB-HOLE: $\varnothing 3,1 \pm 0,1$ mm; PCB-THICKNESS: 1,6mm
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 163A15259X CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

| | |
|---|--------|
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |
| CUSTOMER APPROVAL DATE: | |
| NAME: | TITLE: |
| COMPANY NAME: | |
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |

| | | | | | | | | |
|--|-------------|------|------|-----------|------------|----------------|--------------|--|
| THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND | | | | tolerance | | dim. in mm | | |
| | | | | date | | | name | |
| | | | | drawn | 28.10.2008 | | Sonnenberg | |
| | | | | appd. | 28.10.2008 | | Mickenbecker | |
| | | | | norm | | | | |
| | | | | d-old | | | | |
| a | Origin | | | | | | | |
| rev. | description | date | name | | | | | |

| | |
|---|-------------|
| scale: 2:1 | |
| material: SEE NOTES | |
| title: D-SUB DUAL PORT 15,88mm 25pos. Male / 25pos. Female with threaded insert | |
| dwg no: | Inventor 10 |
| 16K1A2385 | |
| part no: | 163A15259X |
| DIN-A3 | sh: 1 |

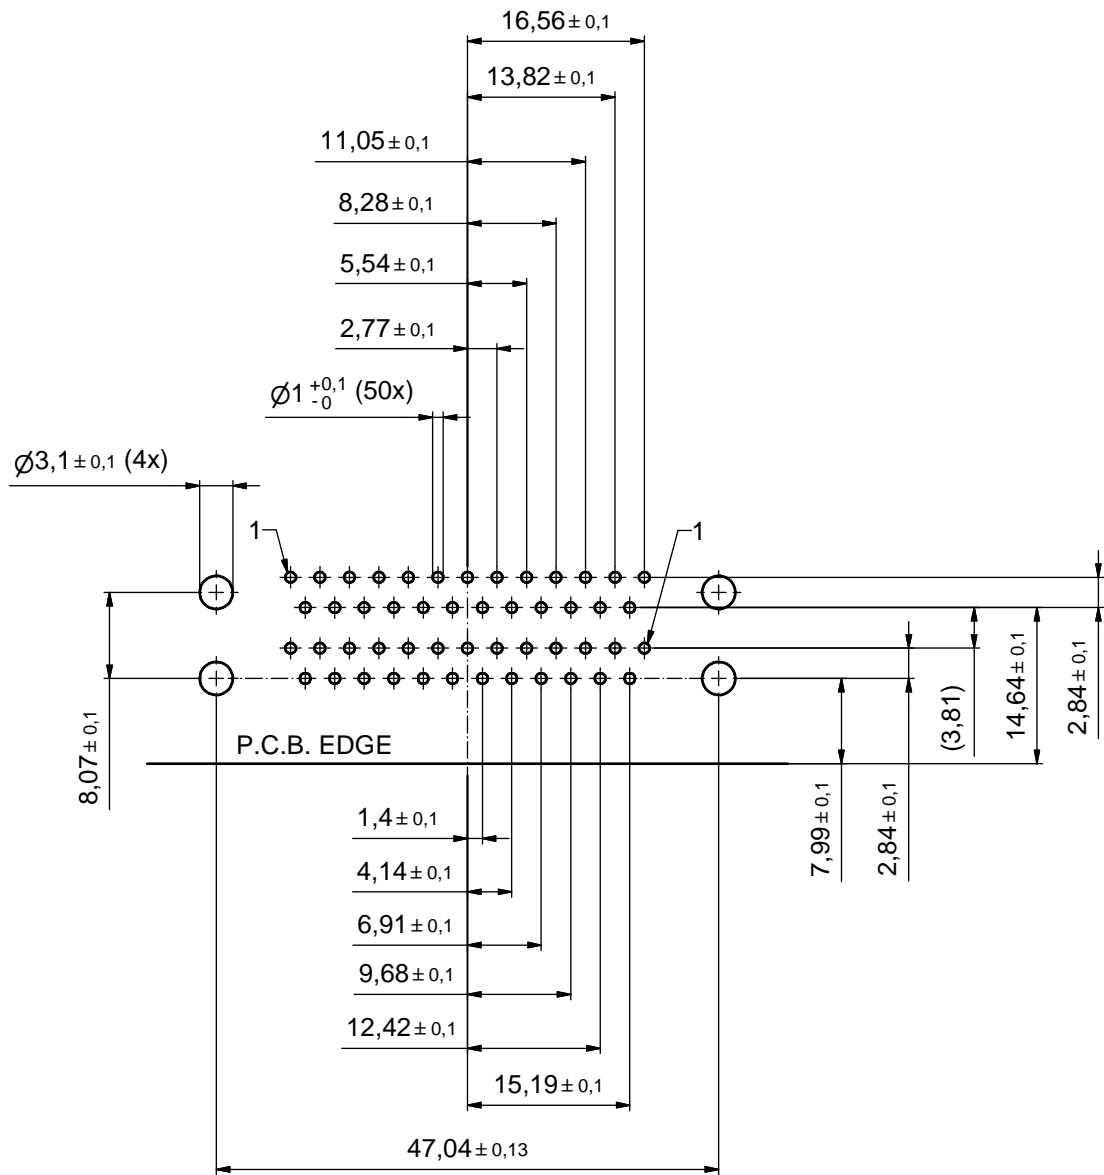

| | |
|---|--------|
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |
| CUSTOMER APPROVAL DATE: | |
| NAME: | TITLE: |
| COMPANY NAME: | |
| APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL | |

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|------|-------------|------|------|
| a | Origin | | |

| tolerance | | dim. in mm |
|-----------|------------|--------------|
| date | name | |
| drawn | 28.10.2008 | Sonnenberg |
| appd. | 28.10.2008 | Mickenbecker |
| norm | | |
| d-old | | |

CONEC

| | | |
|-----------|--|--------|
| scale: | 2:1 | |
| material: | SEE SHEET 1 | |
| title: | P.C.B. HOLE DRILLINGS DUAL PORT 15,88mm MALE / FEMALE with threaded insert | |
| dwg no: | Inventor 10 | DIN-A3 |
| | 16K1A2385 | sh: 2 |
| part no: | SEE SHEET 1 | |