


5324 Series T-1 Right Angle 4 Wide LED Assembly

Description and Features

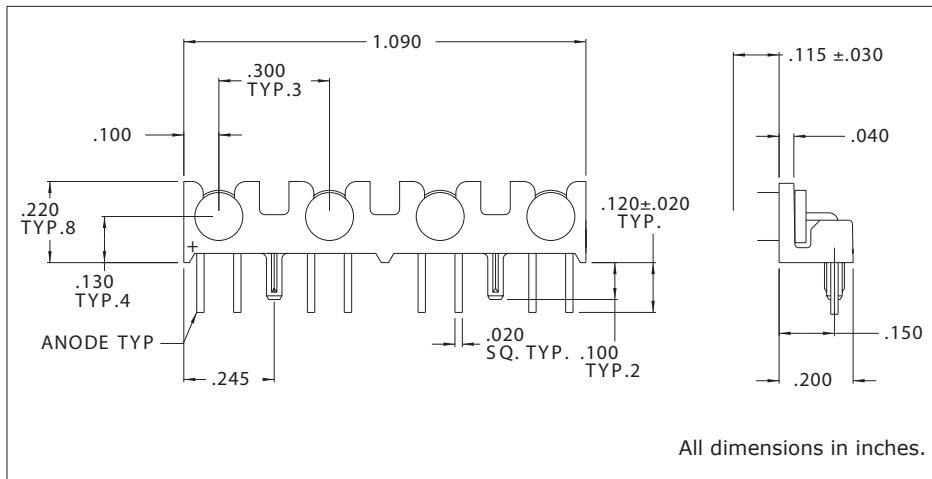

Features

- Perfect height and center spacing with 4 T-1 LEDs.
- Labor-saving single-block installation.
- Standoffs prevent flux entrapment.
- Press-in pins hold part through soldering.

Housing: Black thermoplastic polyester, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Refer to "Mounting Hole Pattern 1.pdf"

Electro-Optical Characteristics and Ratings

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
5324F1	Red	10	10	30	2.0	3.0	5	650
5324F3	Amber	7	10	30	2.2	3.0	5	603
5324F5	Green	16	10	30	2.2	3.0	5	562
5324F7	Yellow	6.3	10	30	2.1	3.0	5	585