



CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	OFF	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 (VA) Max. @20V AC or DC
5. FIXED TERM. & MOVING CONTACT: Copper alloy w/Gold plate  
Over Nickel Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to 85°C

E-SWITCH MARKING  
DN OTHER SIDE

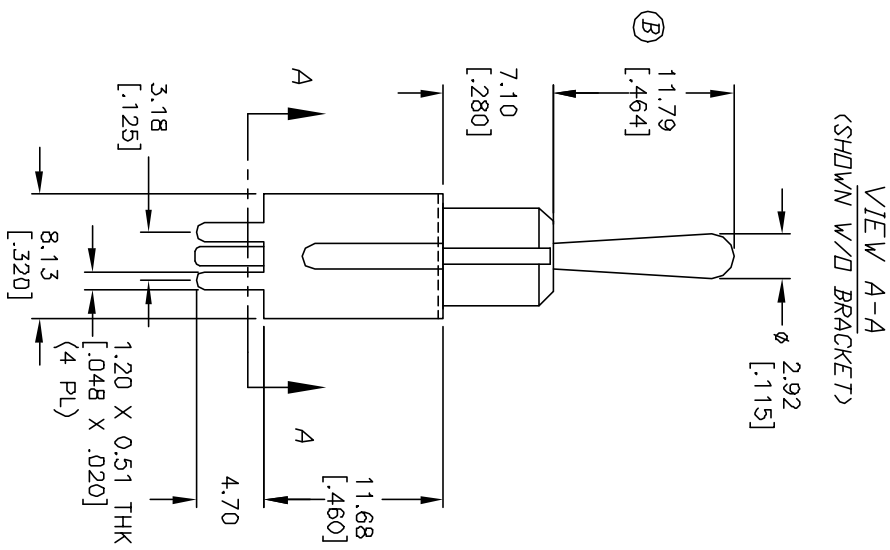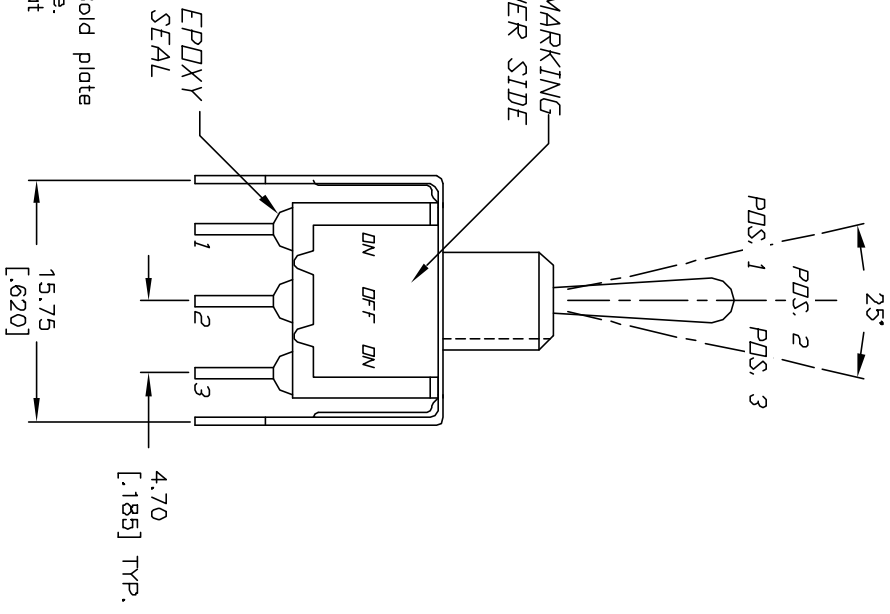

**E-SWITCH®**

REV.	ECN No.	REVISION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
B	11547	REVISED ACTUATOR	6/29/01	CJB	2:1	5/14/01	CJB	T113041	B
TITLE					100 SP-3 T1 B4 V22 R E				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED									