





| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| POS. 1 | POS. 1 | POS. 1 |
| | | |
| (ON) | OFF | (ON) |
| 2-3 | OPEN | 2-1 |

(ON)=MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
- ▲5. RATING: 0.4 (VA) Max. @20V Max.
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
- ▲12. HARDWARE TO BE SUPPLIED BULK:
 - T100011-LOCK WASHER QTY-1
 - T100015-LOCK RING QTY-1
 - T100000-HEX NUT QTY-2

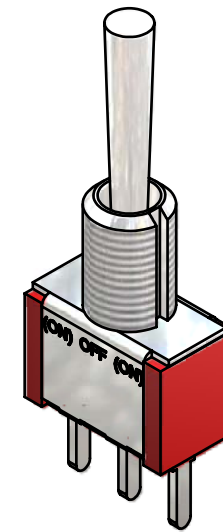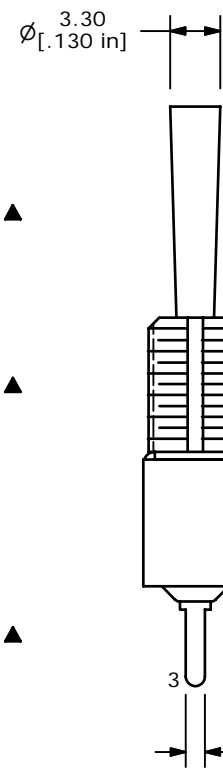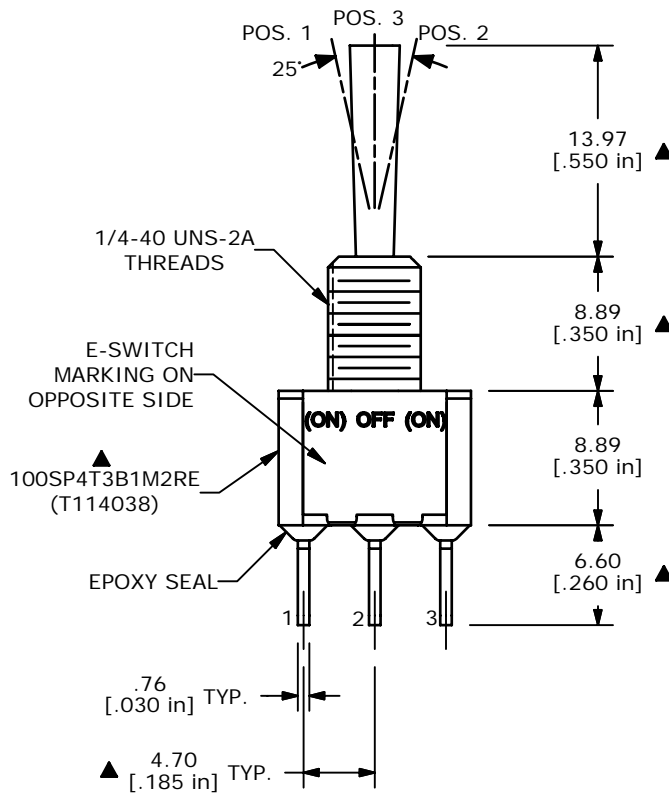

ISOMETRIC



TITLE 100SP4T3B1M2REH

| | | | | |
|-----|--------|-------------------------|--------|----|
| A | 17253 | RELEASED FOR PRODUCTION | 5/3/07 | TN |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| | | | | |
|-------|----------|----|----------|-----|
| SCALE | DATE | DR | DWG | REV |
| 2:1 | 5/3/2007 | TN | ST114038 | A |