



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	A		ECR-12-005726	27MAR12	RK	MY

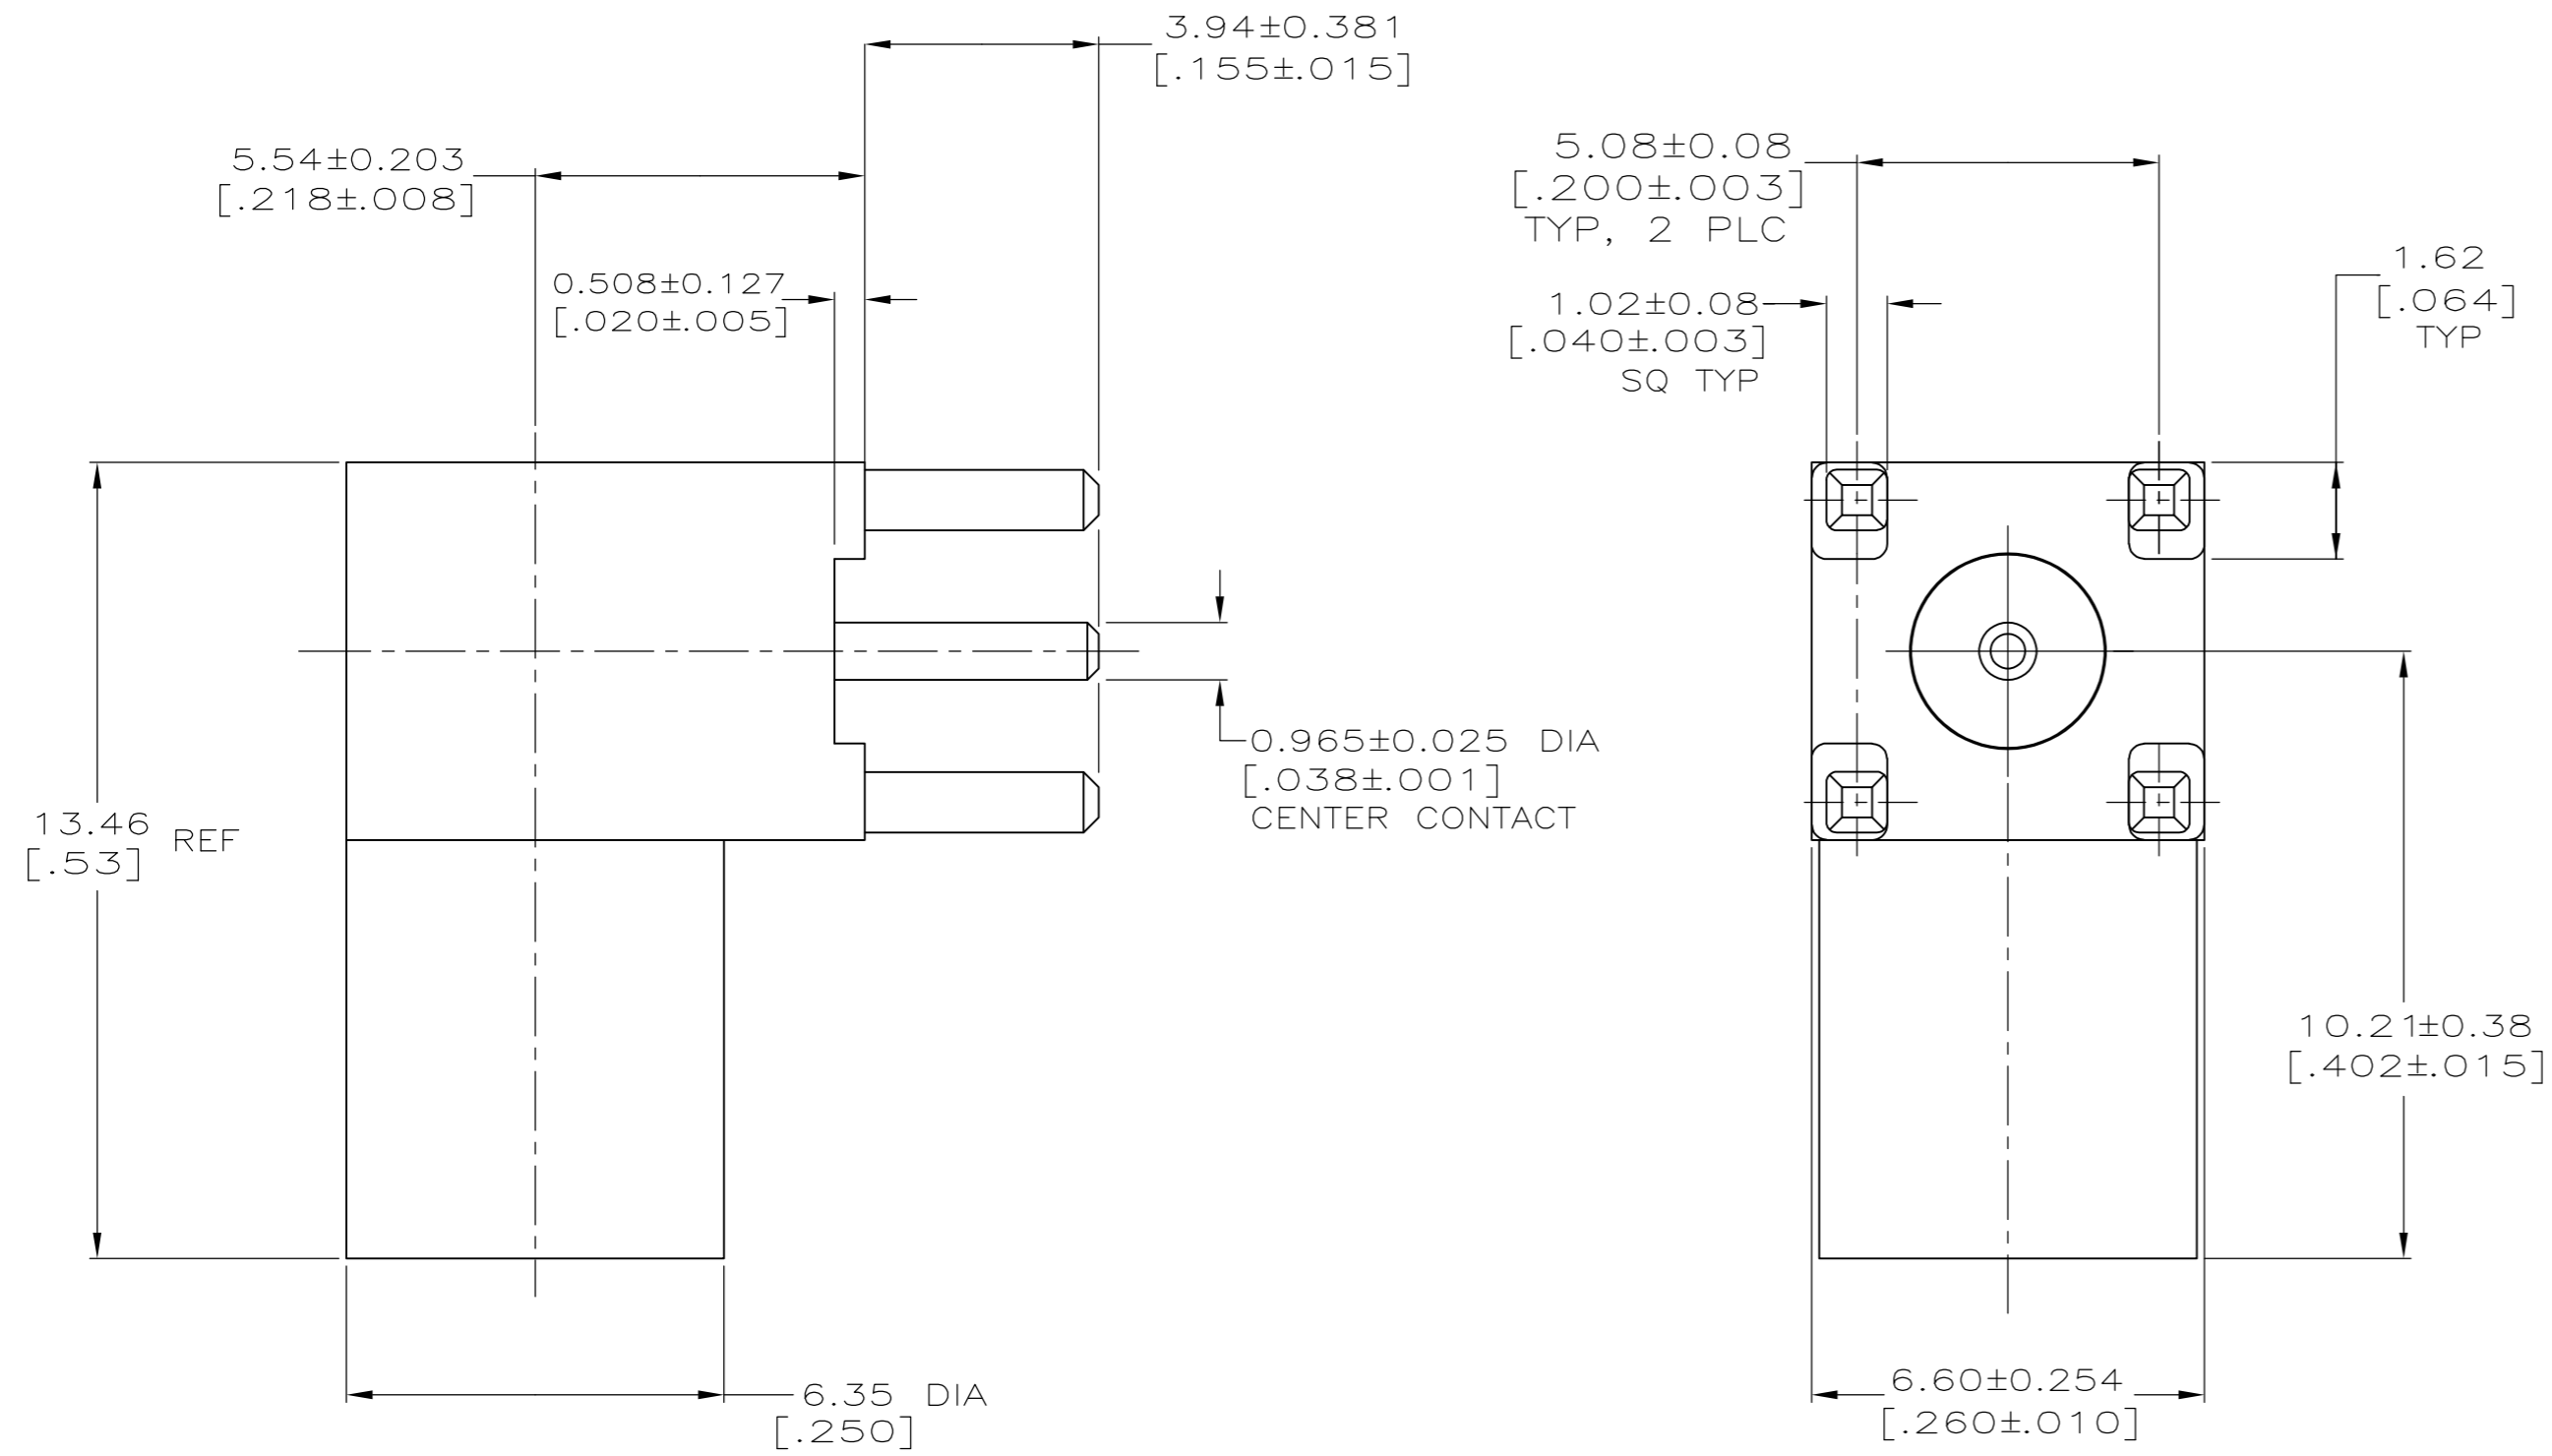

- 1 MATERIALS:
 BODY (LEG): ZINC ALLOY (ZAMAK 3)
 BODY (FRONT): BRASS PER QQ-B-626
 CENTER CONTACT: BRASS PER QQ-B-626
 INSULATORS: PTFE PER ASTM-D-1710
 END CAP: BRASS PER QQ-B-626
- 2 FINISH:
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204
 BODY (LEG): TIN PLATE PER ASTM-B-545
 BODY (FRONT): ELECTROLESS NICKEL
 PL PER MIL-C-26074
 END CAP: NICKEL PLATE PER QQ-N-290
3. INTERFACE PER MIL-C-39012

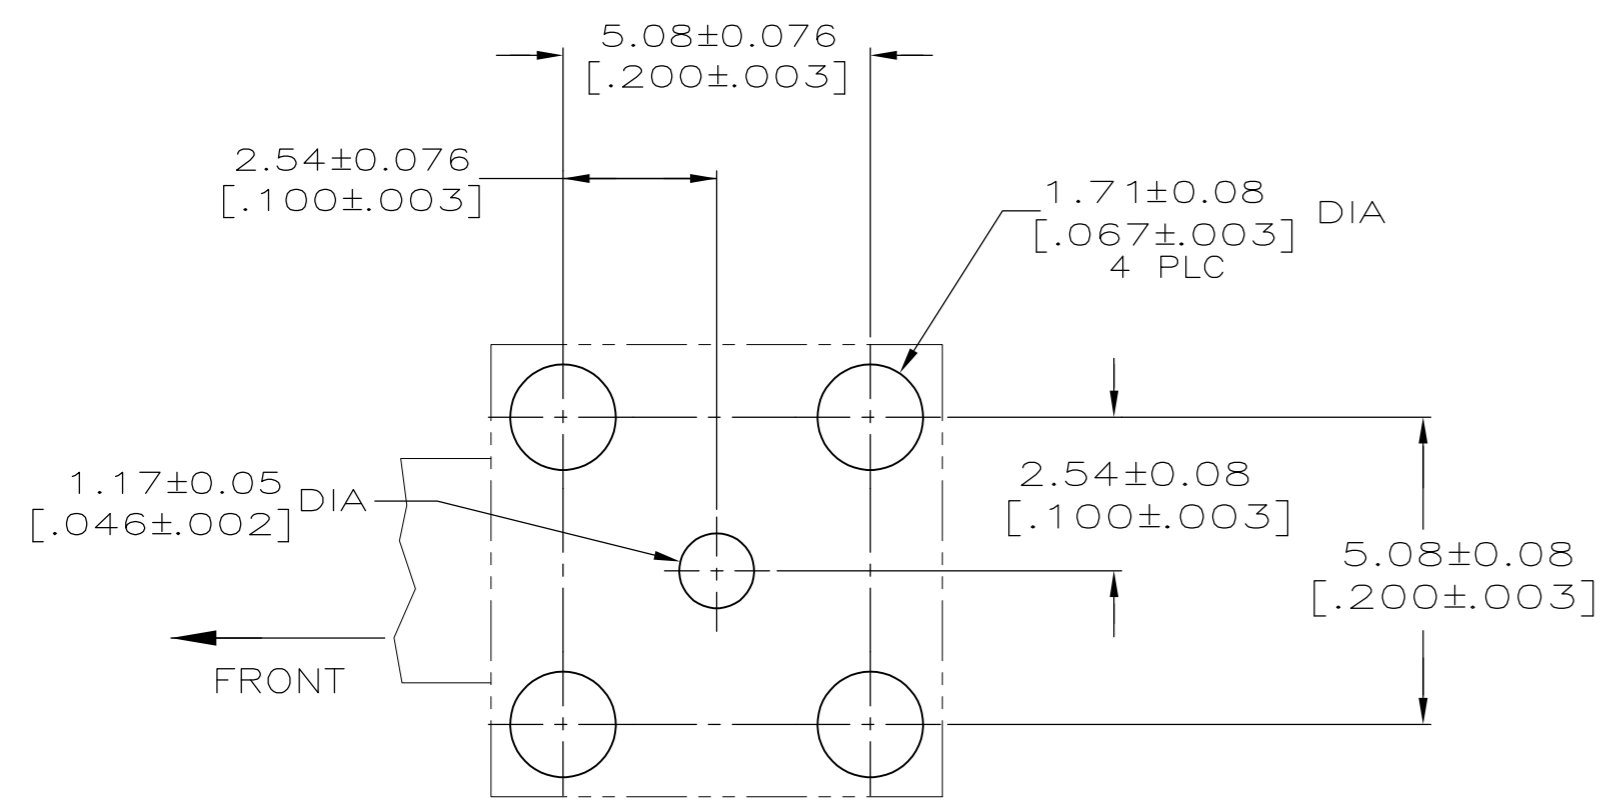

RECOMMENDED PCB CONFIGURATION

5414338

5414338-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - DOCK5 01FEB2005	TE Connectivity	
DIMENSIONS: INCHES		CHK J. HAVENER 01FEB2005	NAME PLUG, RTANG, SMB/PCB WITH KEYING LEG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. HAVENER 01FEB2005	SIZE A2	CAGE CODE 00779
0 PLC ± - 1 PLC ± - 2 PLC ± .25 [.010] 3 PLC ± .13 [.005] 4 PLC ± - ANGLES ± -		PRODUCT SPEC APPLICATION SPEC	DRAWING NO 5414338	RESTRICTED TO -
MATERIAL 1	FINISH 2	WEIGHT -	SCALE 8:1	SHEET 1 of 1
CUSTOMER DRAWING			REV A	