

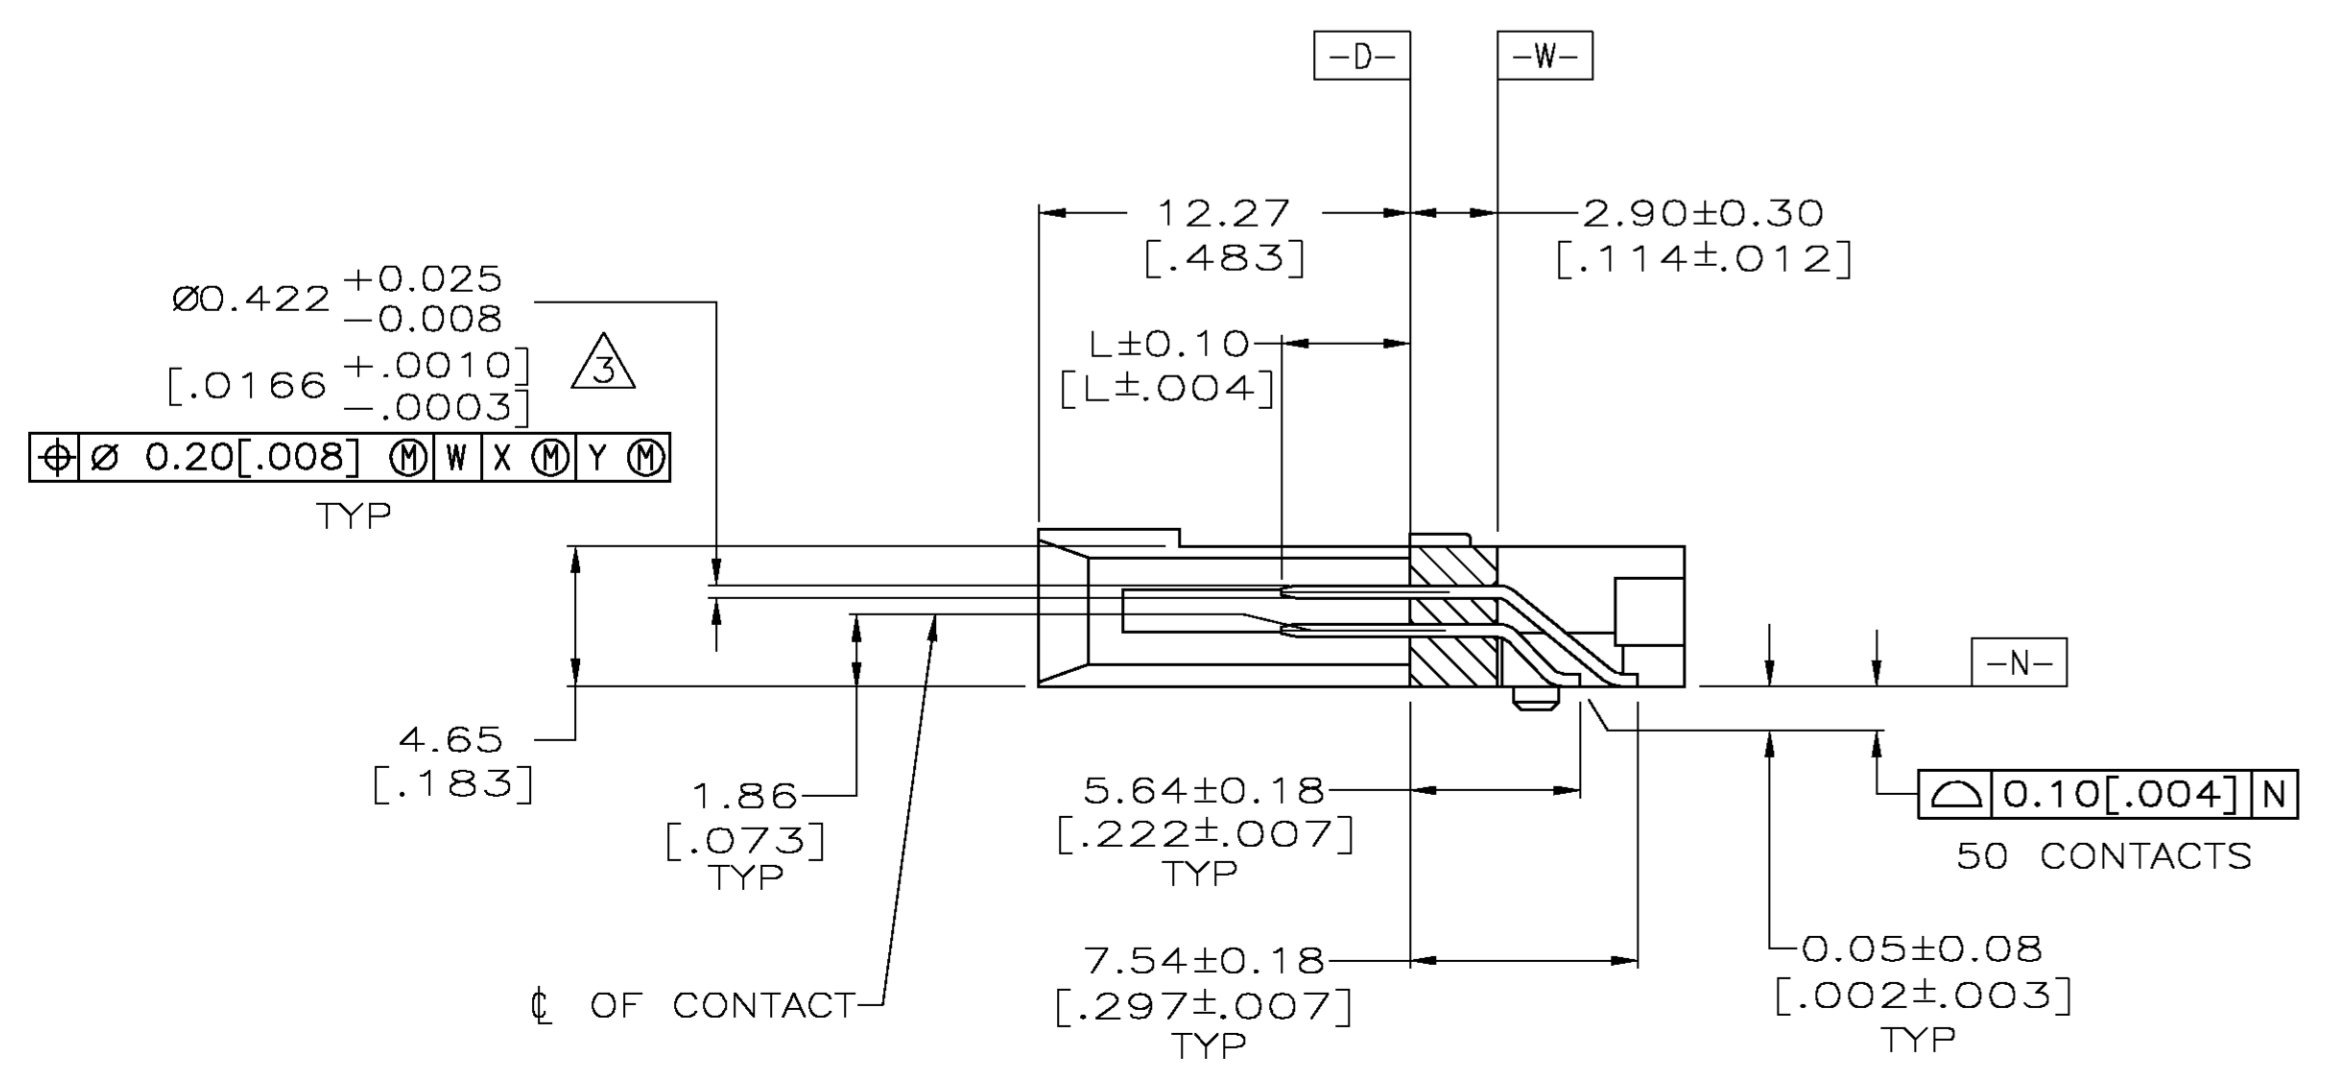
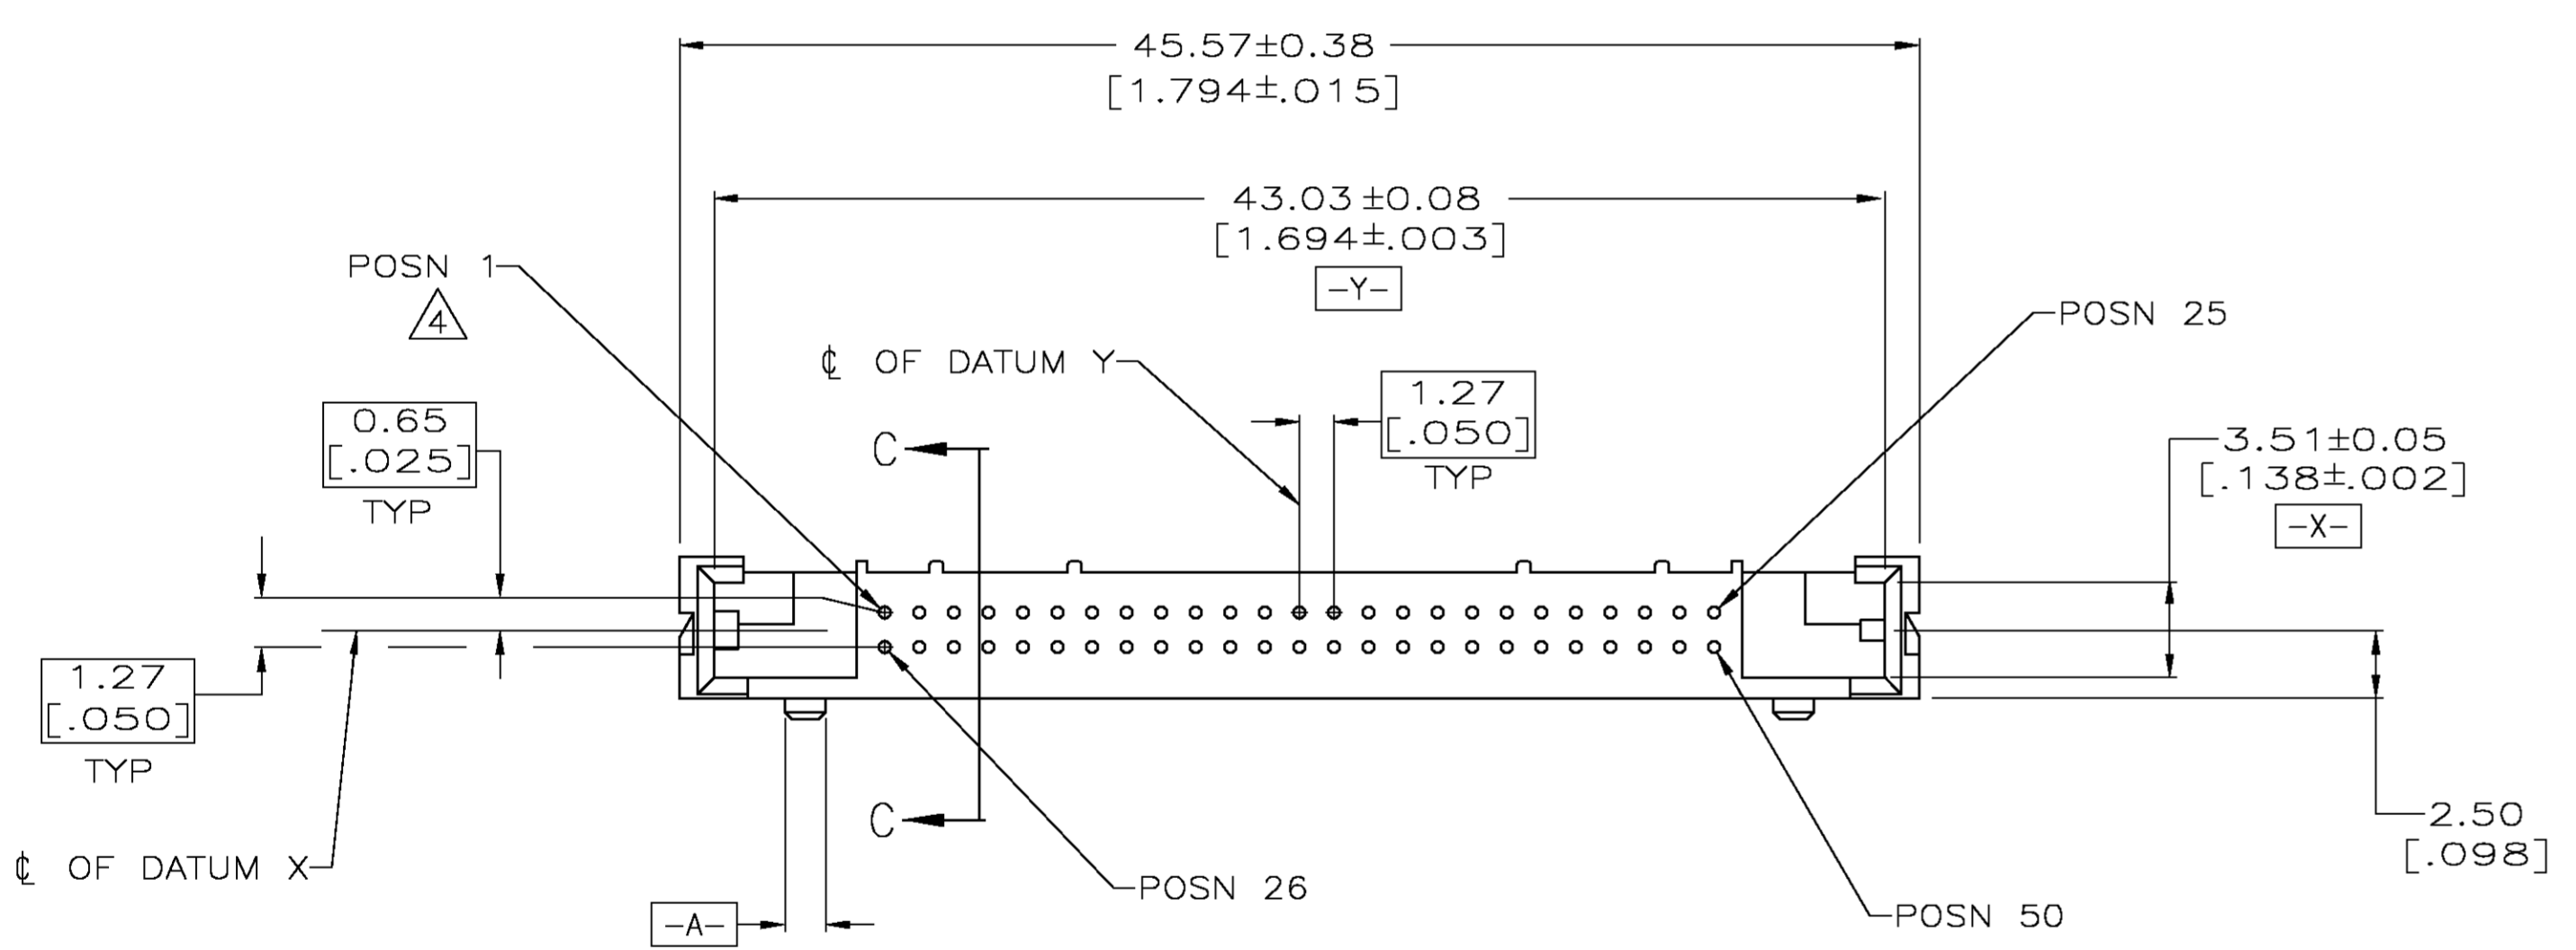


LOC		DIST		REVISIONS			
P	LR	DESCRIPTION	DATE	BY	APPD		
A		REVISED PER OS11-0091-03	12SEPT03	JB	KK		

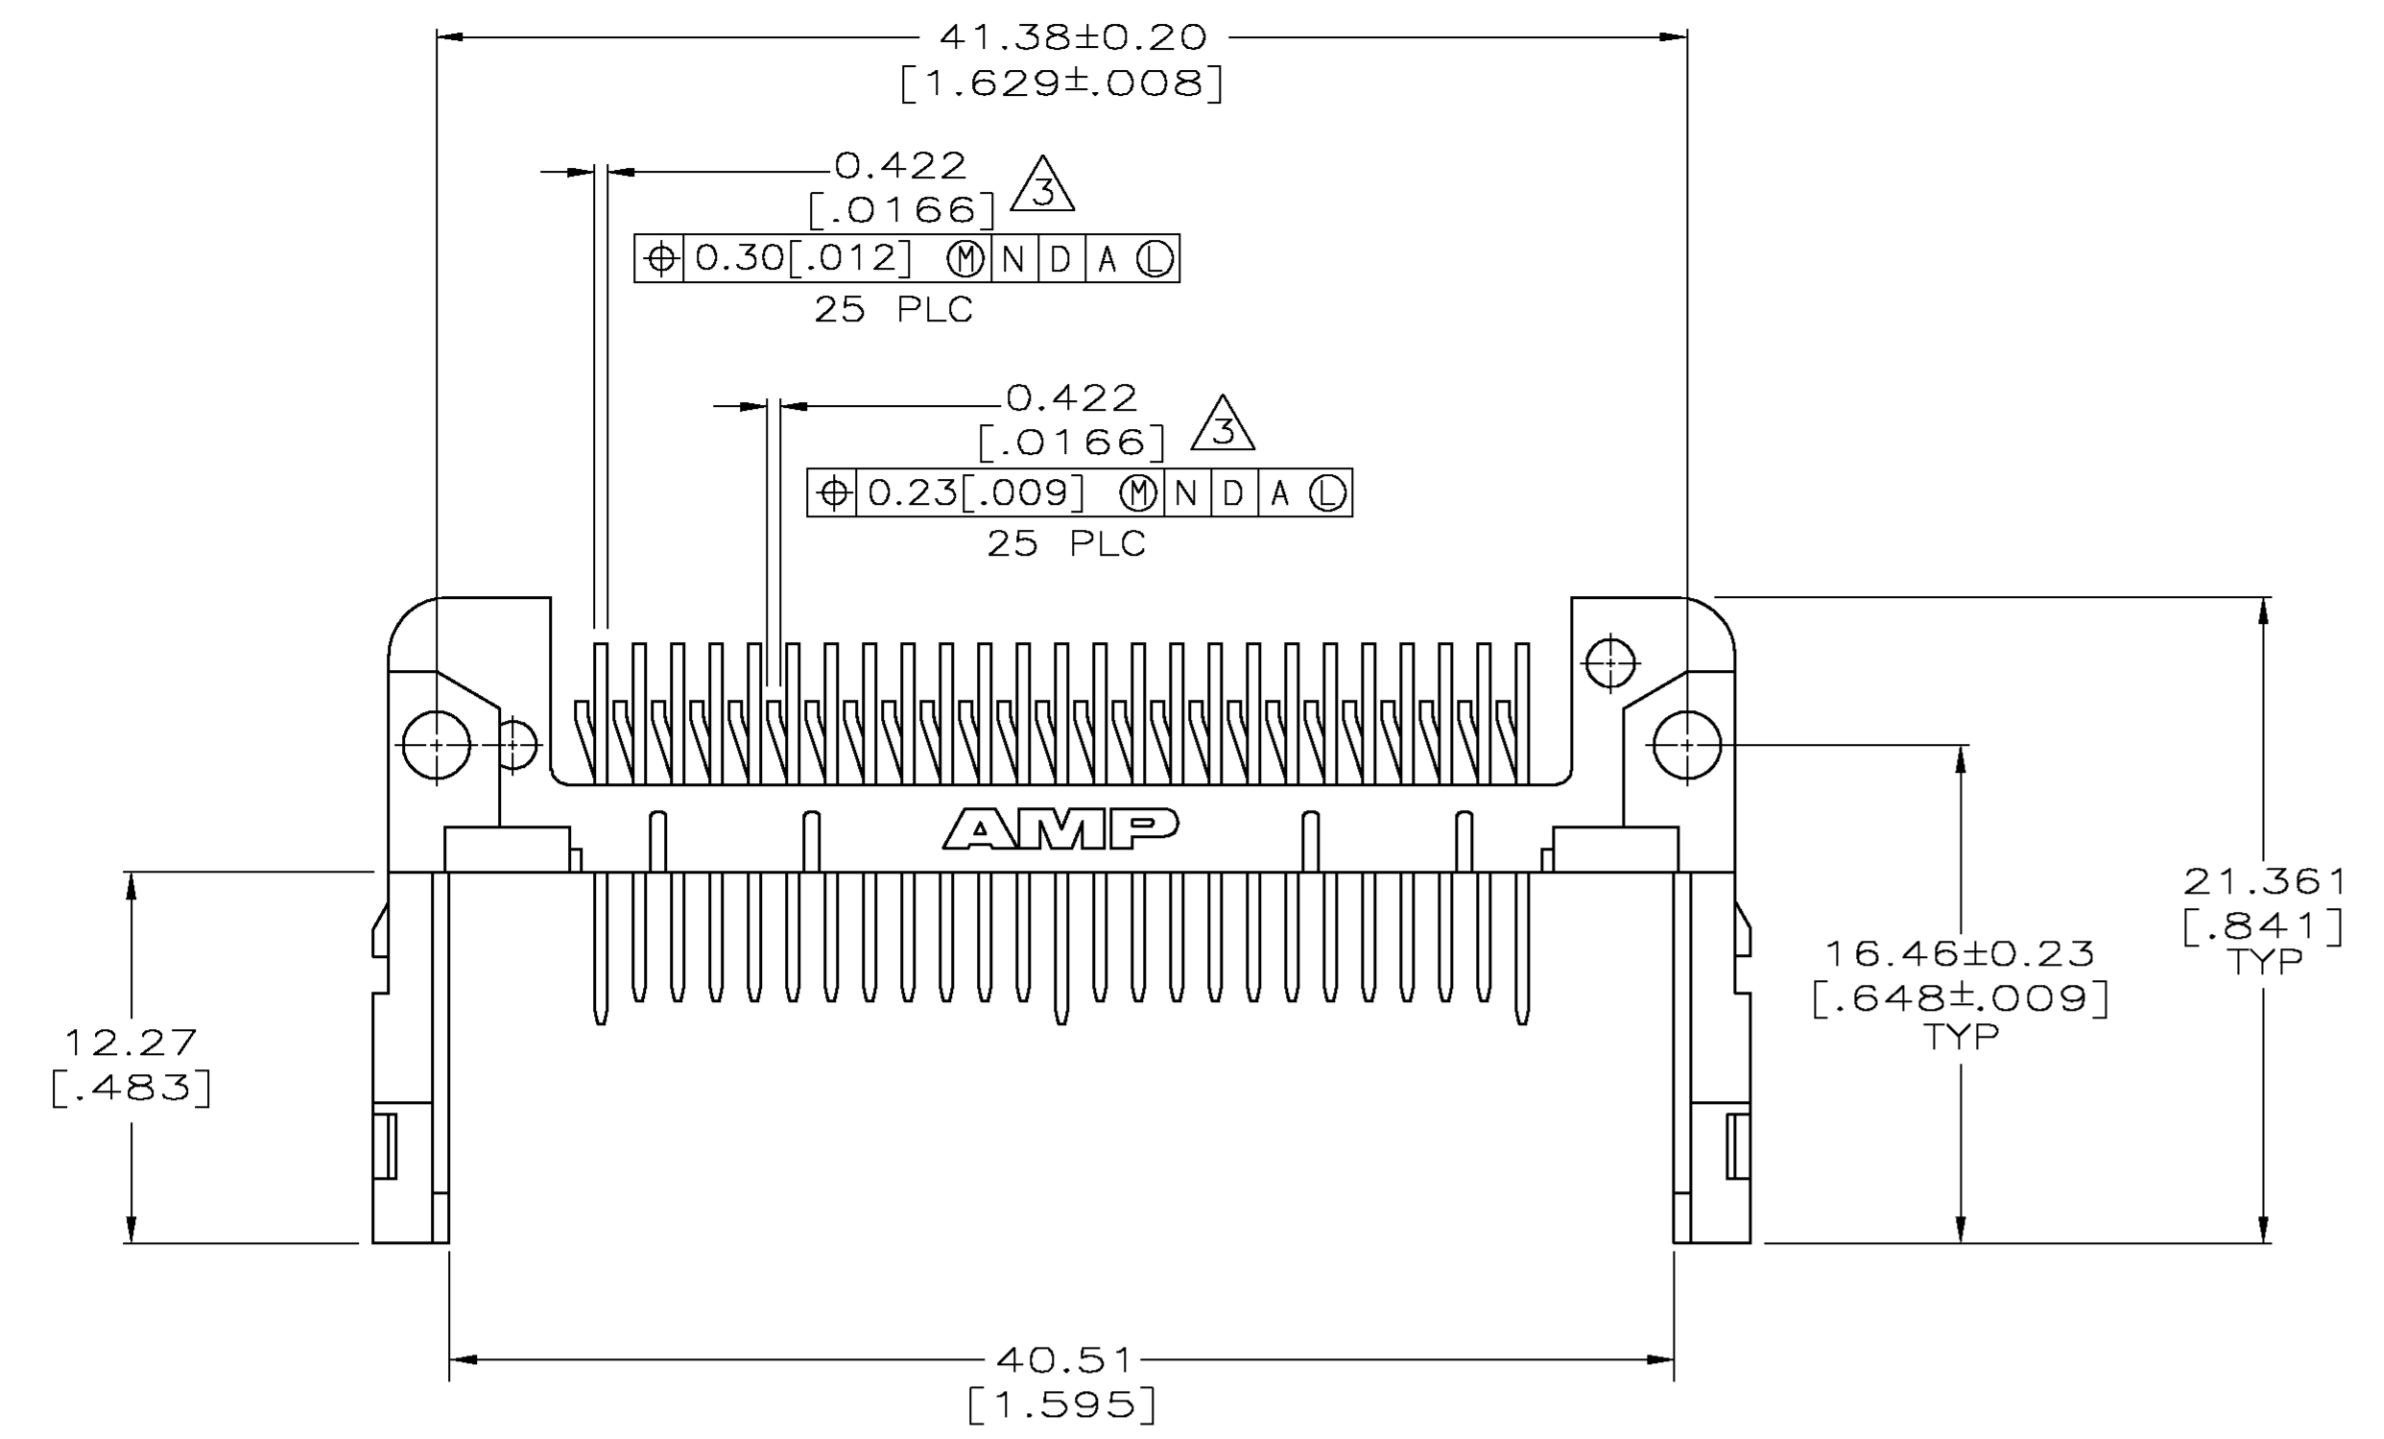

- △ HOUSING: POLYESTER LIQUID CRYSTAL, BLACK; CONTACTS: BRASS.
- △ CONTACTS: 0.76 μm [.00030] MINIMUM GOLD FOR A LENGTH OF 3.50 [.138] MIN FROM MATING END, 3.81 μm [.000150] MIN TIN-LEAD ON SOLDER TAILS, ALL OVER 1.27 μm [.000050] MINIMUM NICKEL
- △ POSITION TOLERANCE APPLIES AT CONTACT TIP.
- △ POSITION NUMBERS SHOWH FOR REFERENCE ONLY.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6. CUSTOMER TO PROVIDE CARD GUIDANCE SYSTEM
- 7. CONNECTOR REQUIRES USE OF 2 - SIZE 2M SCREWS FOR FASTENING TO PRINTED CIRCUIT BOARD

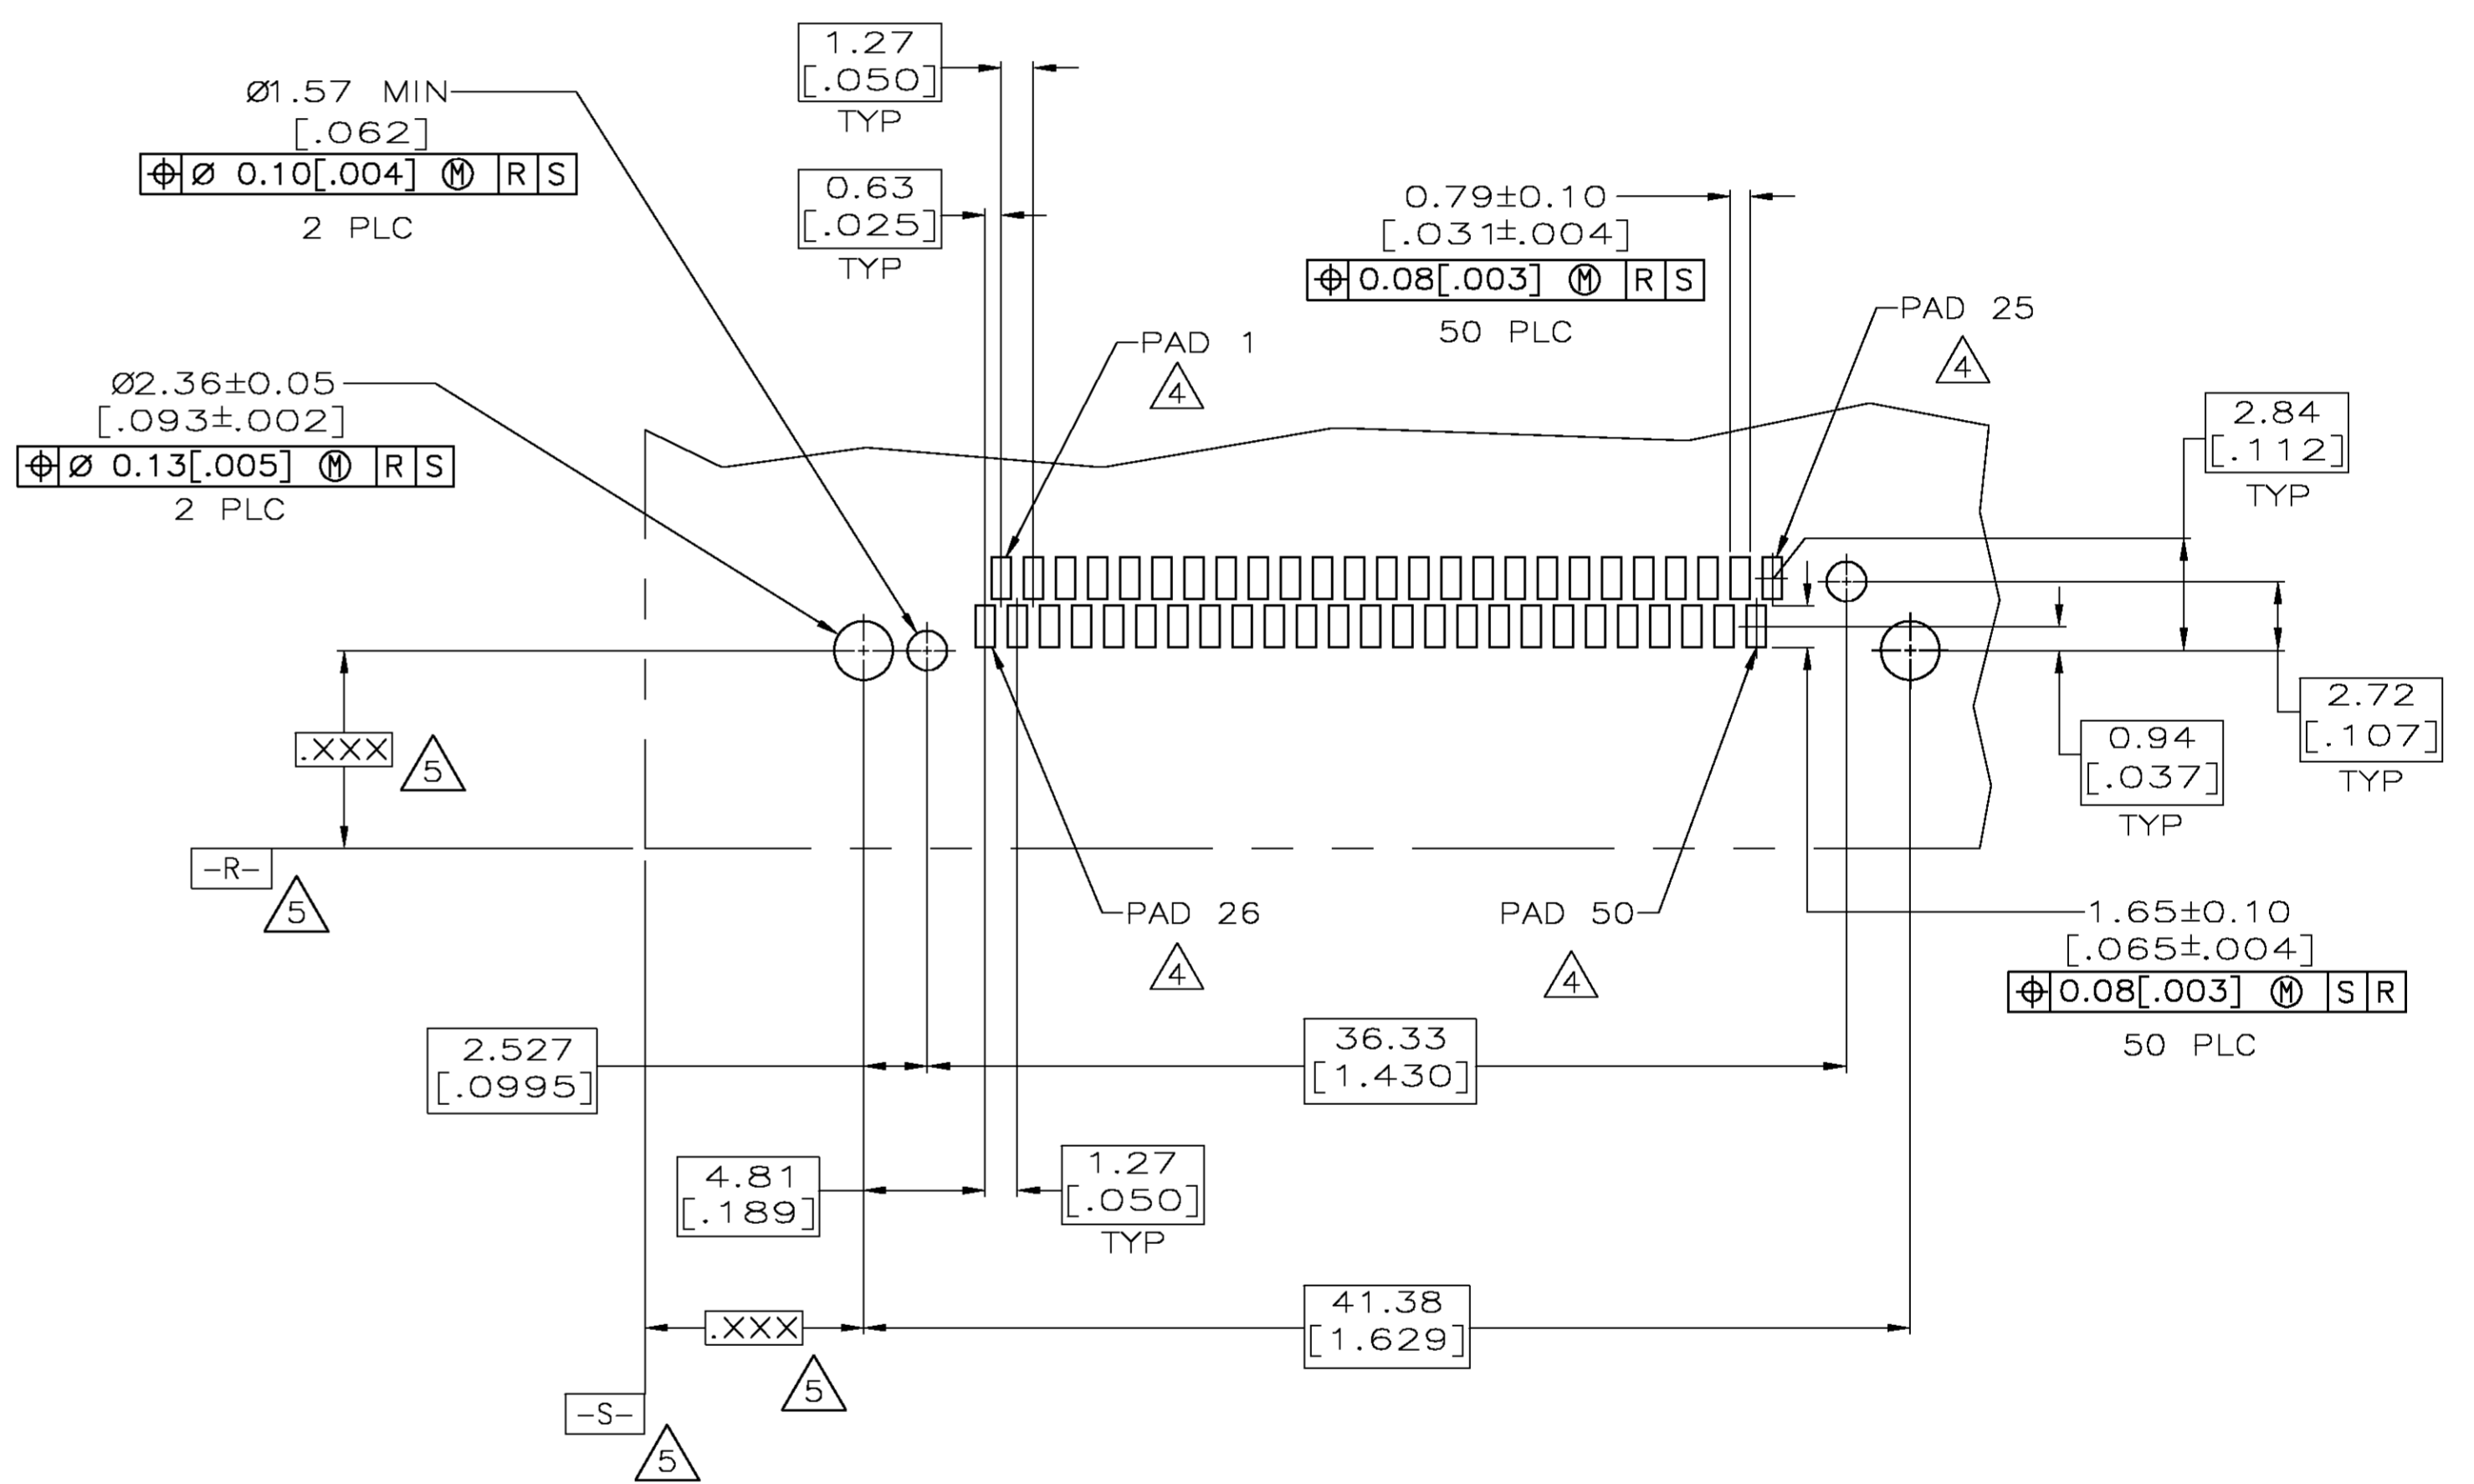

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

1, 13, 38, 50	ALL OTHER PINS	25, 26	788667-1
5.00 [.197]	4.25 [.167]	3.50 [.138]	PART NUMBER
"L" (PIN LENGTH) AND LOCATION			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± 0.13 [.005]	4 PLC ± -	ANGLES ± -
-------------------------	--	-----------	-----------	-----------	---------------------	-----------	------------

MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		A1	00779	788667	

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV A