



**Fig. 1**

- Ultra low profile receptacles sit .018" above the board.
- Series 714 uses M-M# 0552-1, 0552-2 pin receptacles. See page 127 for details.
- Hi-Rel, 3-finger BeCu #11 clip is rated at 3amps. See page 206 for details.

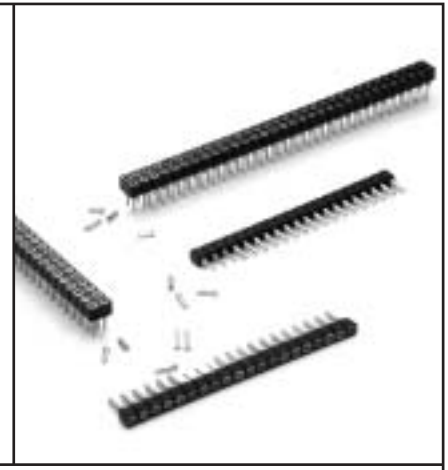

**Ordering Information**

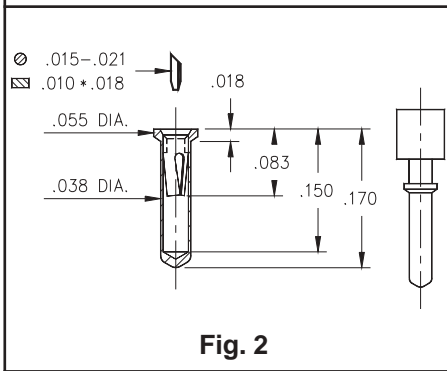

**Fig. 2**

**Fig. 1**


**Single Row (.039 min. mounting hole)**

714-XX-1\_\_-31-012  
**Specify # of pins**      ↳      01-64

**Fig. 2**

**Single Row (.039 min. mounting hole)**

714-XX-1\_\_-31-018  
**Specify # of pins**      ↳      01-64

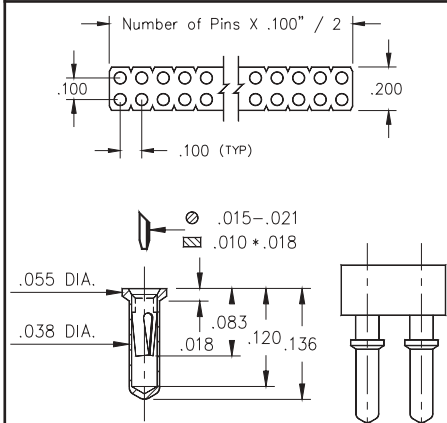

**Fig. 3**

**Fig. 3**


**Double Row (.039 min. mounting hole)**

714-XX-2\_\_-31-012  
**Specify # of pins**      ↳      02-64

**Fig. 4**

**Double Row (.039 min. mounting hole)**

714-XX-2\_\_-31-018  
**Specify # of pins**      ↳      02-64

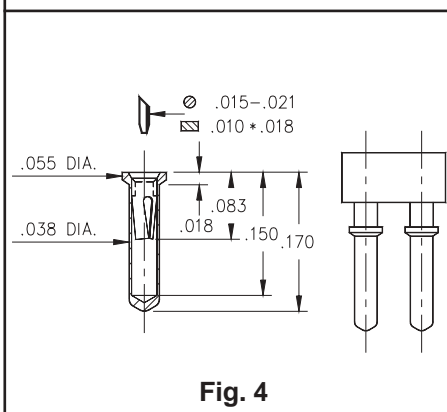

**Fig. 4**

**XX= Plating Code**  
**See Below**

SPECIFY PLATING CODE XX=			<b>93</b>	<b>99</b>
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb