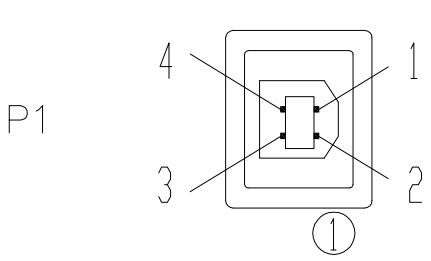

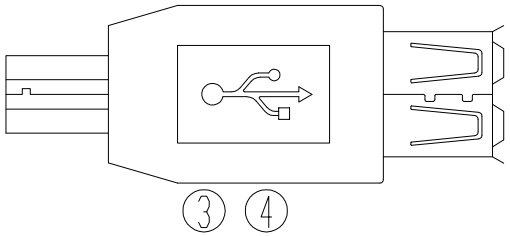



PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
SHEEL	SHEEL

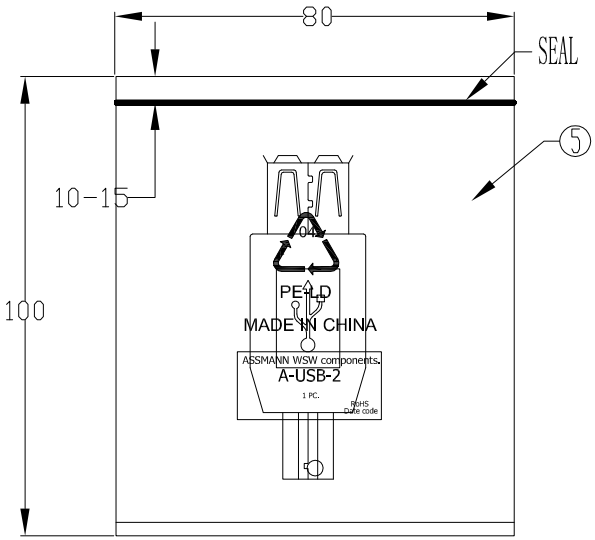

1PC/PE BAG

Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:3 ohm max.
3.Insulation Resistance:20M ohm min.
4.Hi-Pot:300V DC/10ms

NO.	NAME	Q'TY	SPECIFICATION
⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA" +"10PCS".
⑤	PE BAG	1	CLEAR SIZE:80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC".
④	OUT JACKET	6g	BEIGE(IV-29) 40P PVC (WM-006)
	IN JACKET	4g	CLEAR LDPE (NM-009)
③	CABLE	5	UL1007 28AWG L=30MM
②	CONN	1	USB A FEMALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B MALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	20.02.2017	Amy

	Date	Name
Drawn	20.02.2017	Amy
Approved	20.02.2017	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-USB-2

Drawing-No.
ASS 7876 CA

rev00

Replace

Sheet