


1

2

3

4

5

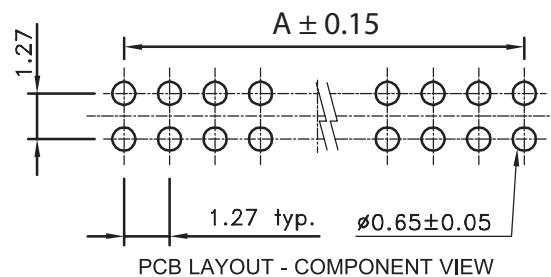

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 6T
 FLAMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOYS
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER CECC 75 301-802
 PITCH: 1.27MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1A MAX
 WORKING VOLTAGE: 50V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD


 CERTIFIED: E323964

SOLDERING
 JEDEC LEAD FREE WAVE SOLDERING PROCESS



PACKAGING
 BAG

DIMENSION

A = 1.27 x (NB. PIN / 2 - 1)
 B = 1.27 x (NB. PIN / 2)

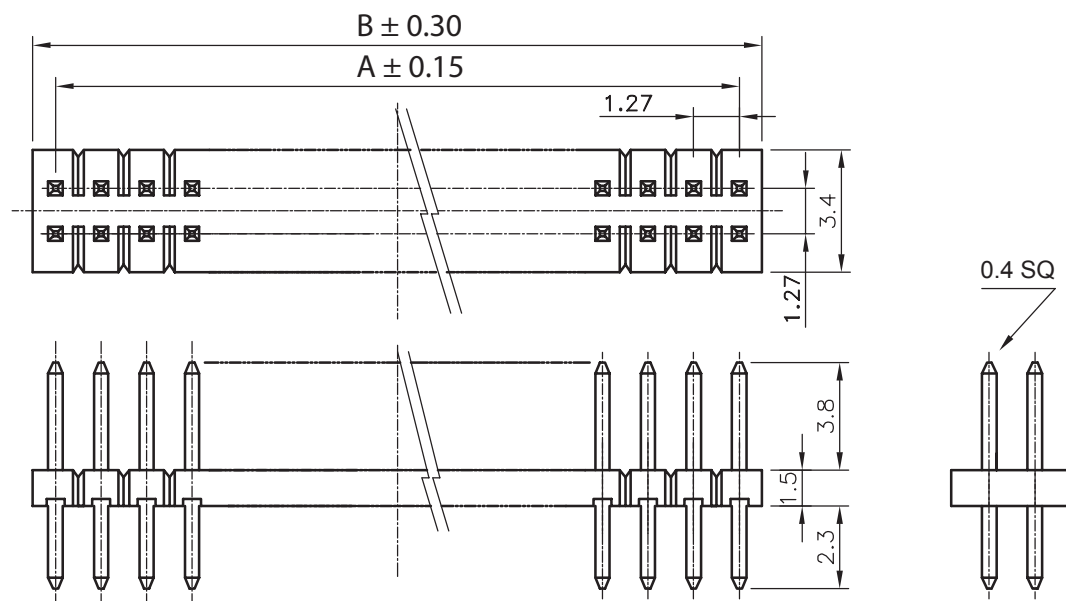

RoHS Compliant

| | | | | | | |
|-----|-----------|---------------|----|--|---|---|
| G | 19-FEB-14 | SOLDERING | QL | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  |
| F | 26-JUL-13 | DIM A & B | QL | | | |
| E | 24-OCT-11 | SOLDERING | GG | | | |
| D | 25-NOV-09 | STANDARD | JP | | | |
| C | 23-NOV-07 | MODIFICATIONS | EC | APPROVAL: RJ | UNIT: MM | DESCRIPTION: 1.27MM DUAL PIN HEADER |
| B | 18-DEC-06 | DRAW | EC | | SCALE: | |
| A | 08-JAN-02 | PDF | JP | | SHEET: 1/1 | WERI PART NO: 622 0xx 211 21 |
| REV | DATE | FILE | BY | | DRAW: PEARL | |

SIZE

A4