
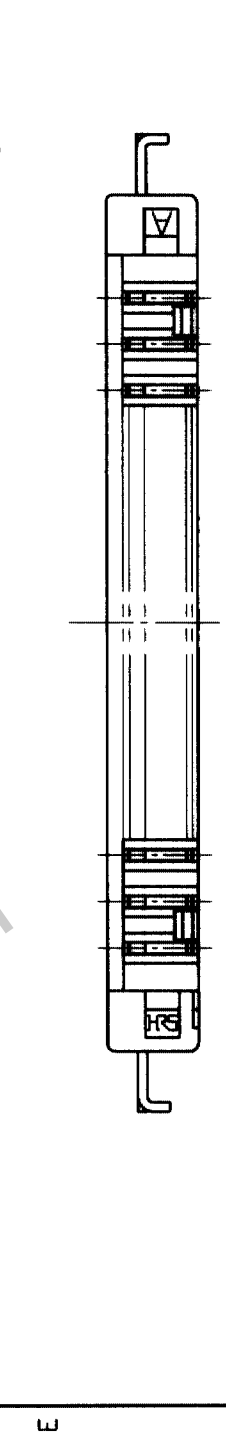
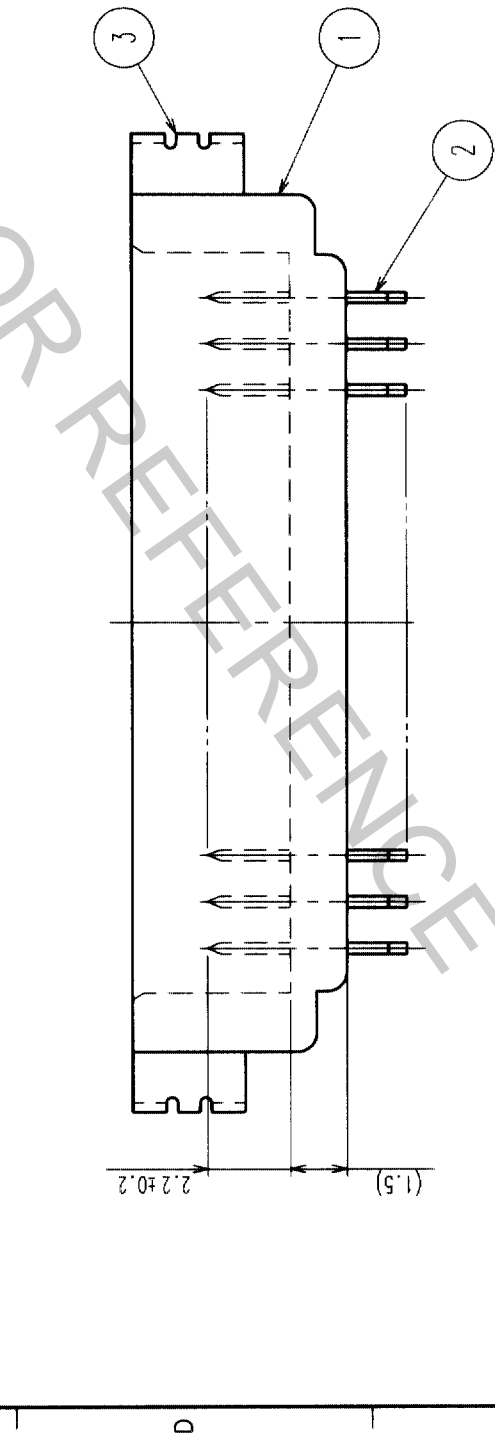
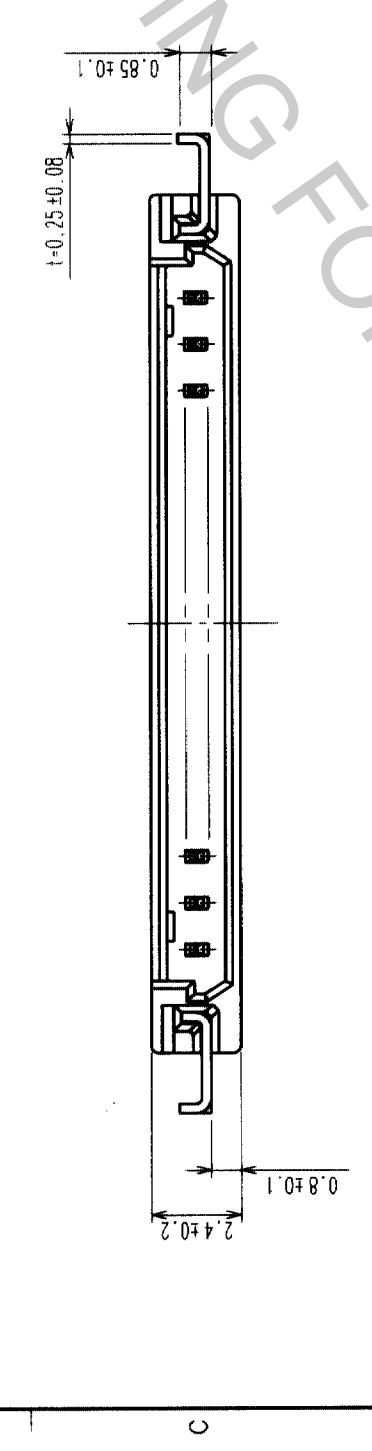
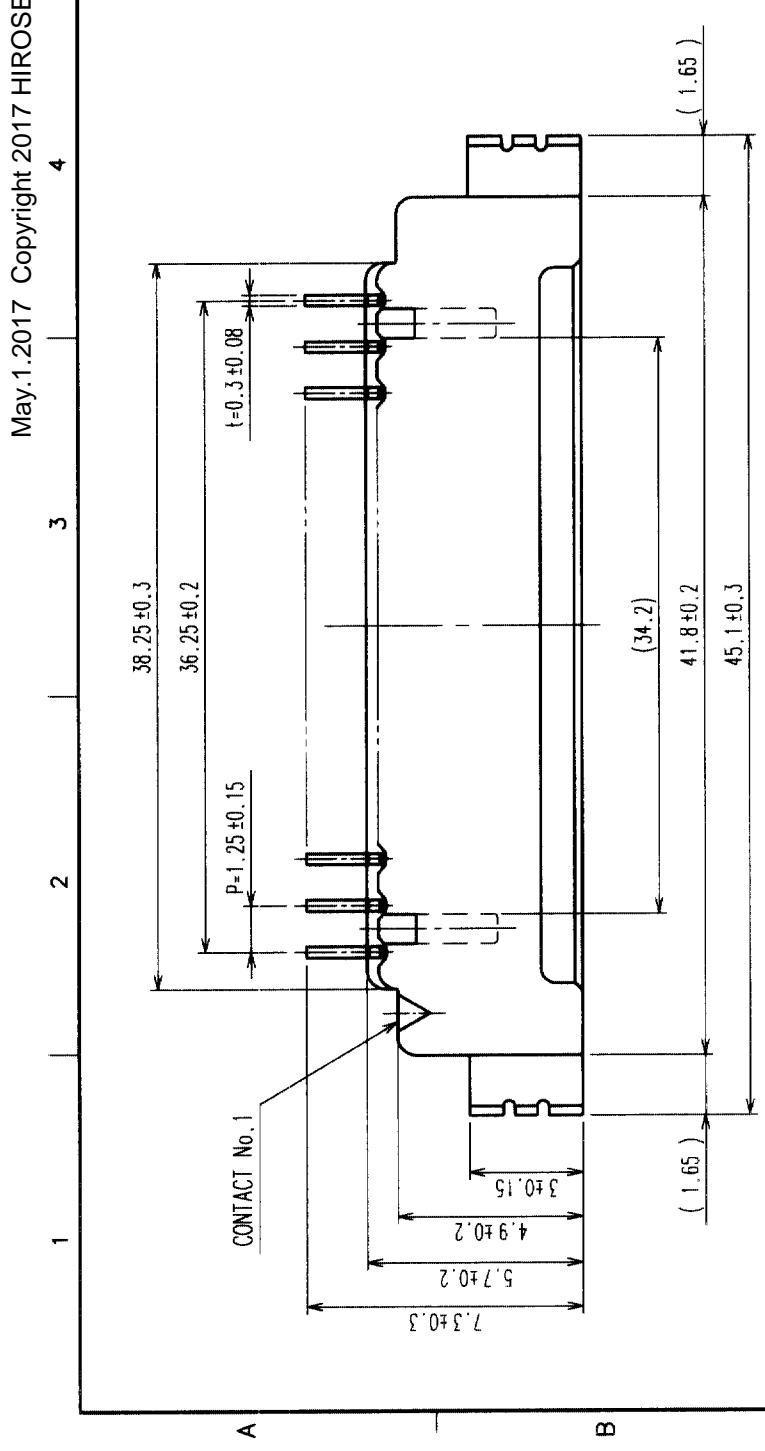
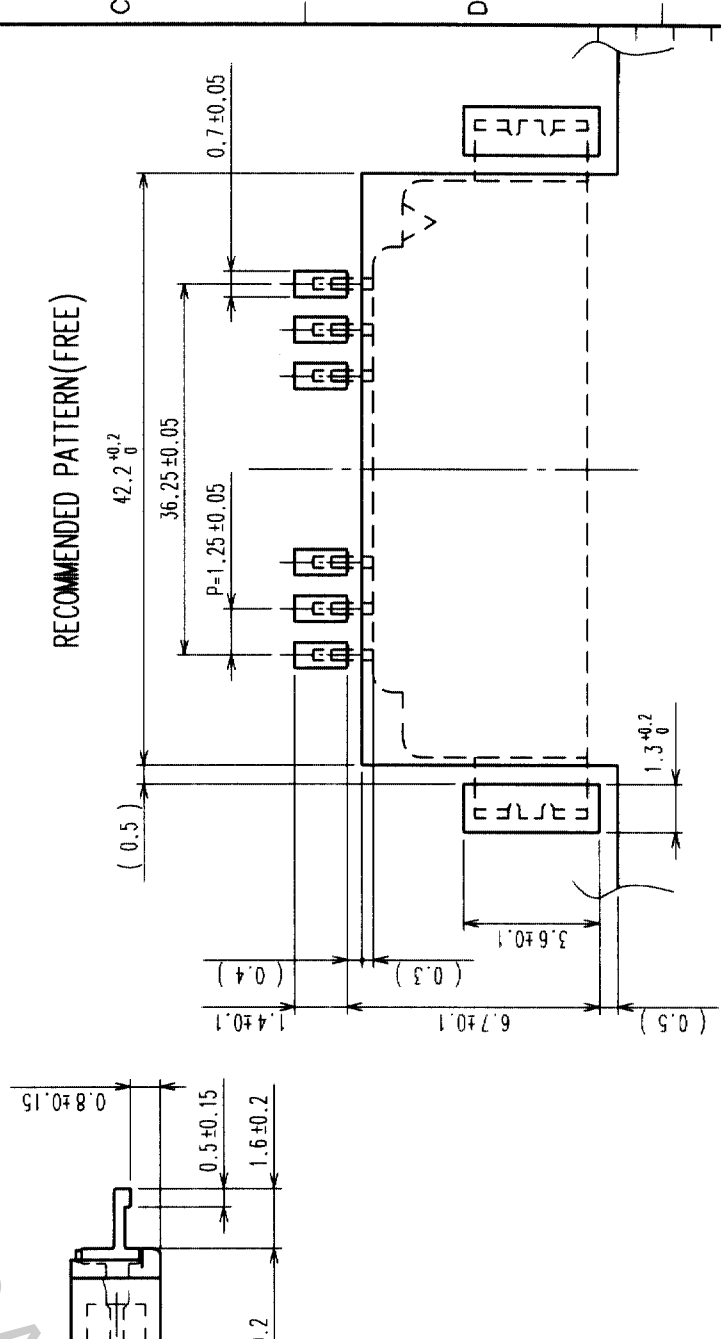


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

APPLICATION DIAGRAM(10:1)

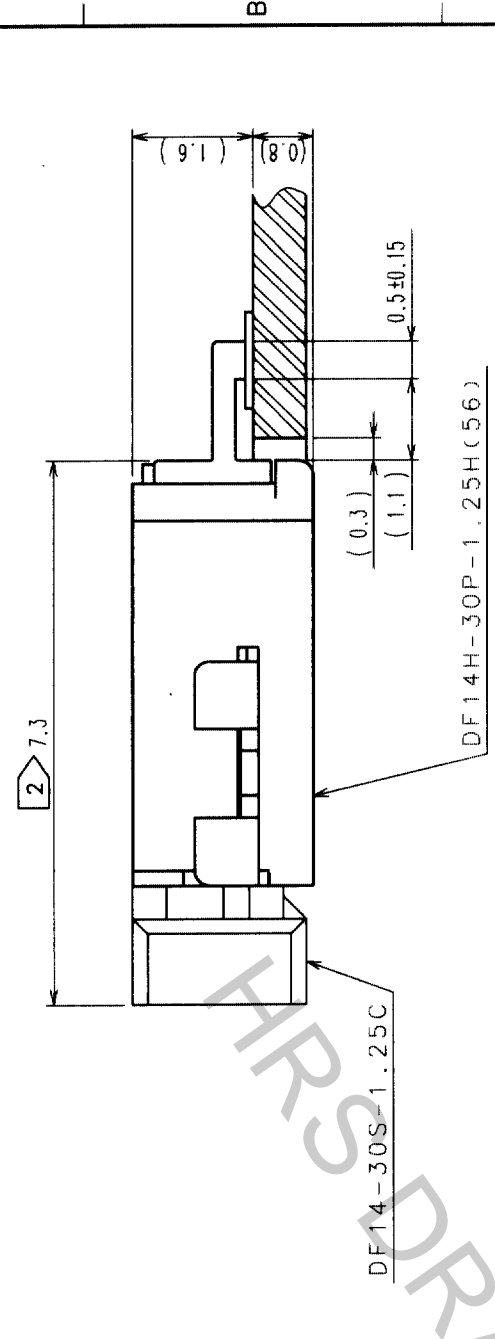

NOTES 1 LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1 mm MAX.  
 2 THIS DIMENTION SHALL CHANGE BY CONNECTION WITH  
 DF14-30S-1.25C :7.3 mm...CRIMP TYPE  
 DF14-30S-1.25R30(01):9.7 mm...IDC TYPE  
 IDC: INSULATION DISPLACEMENT CONNECTION

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	BRASS	CONTACT AREA: GOLD PLATED 0.1µm min SOLDERING AREA: TIN-COPPER PLATED 1µm min	5	PS	CLEAR, EMBOSSED TAPE
1	POLYAMIDE	UNDER PLATING: NICKEL 1µm min BEIGE (UL94V-0)	4	POLYESTER	CLEAR, COVER TAPE
			3	PHOSPHOR BRONZE	TIN-COPPER PLATED 1µm min UNDER PLATING: NICKEL 0.5µm min

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	S. Saito	S. Saito	T. Miyagaki	T. Miyagaki	
	03.03.05	03.03.05	03.03.05	03.03.05	

DRAWING NO.	PART NO.
EDC3-161484-05	DF14H-30P-1.25H(56)
SCALE 5:1	CODE NO. CL538-0188-0-56
UNITS mm	

TO	
----	--

