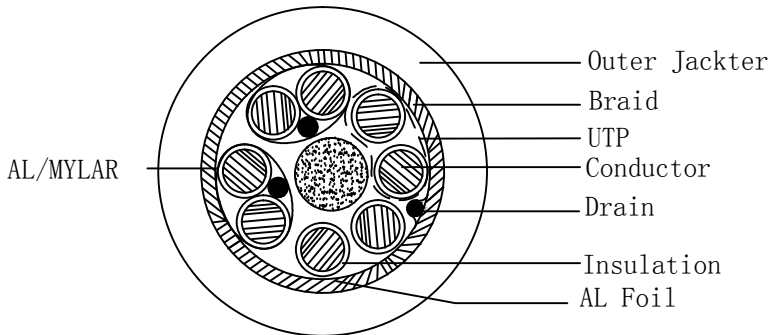




	1	2	3	4	5	6	7			
A	Wire Spec		UL2725 (7/0.127TC*1P+D+AL+MYLAR)*2+ 7/0.127T*1P+7/0.20T*2C+F+ADB			 <p>① Wire color assignment</p>  <p>Packing: 305M/Reel</p>			A	
B	Cores		2P	1P	2C				B	
C	Conductor	AWG	28AWG	28AWG	24AWG				C	
		Material	Tinned Copper	Tinned Copper	Tinned Copper					
		Construction	7/0.127±0.004mm	7/0.127±0.004mm	7/0.2±0.004mm					
		O.D	0.38mm (REF)	0.38mm (REF)	0.60mm (REF)					
D	Insulation	Thickness	0.26mm (REF)	0.23mm (REF)	0.25mm (REF)				D	
		O.D	0.90±0.05mm	0.84±0.05mm	1.10±0.05mm					
		Color	Yellow,Blue,Orange,Purple	WHITE, GREEN	RED, BLACK					
		Material	Foamed PE	HDPE	SR-PVC					
E	Filler	Filler	FILLER						E	
F	Braid	Material	AL-MG						F	
		Construction	16/6/0.12mm							
G	Shield	AL foil	Color :Blue						G	
		MYLAR	White							
H	Drain	Material	Tinned Copper			H				
		Construction	7/0.127T							
A	Outer Jacket	Material	80°C PVC 80P			A				
		O.D	5.5±0.20mm							
		Color	Black							
B	Font	Color	White			B				
		Print:	㊦ AWM STYLE 2725 80°C 30V 28AWG/3P 24AWG/2C --- c AWM I/II A 80°C 30V FT1 USB CABLE							
RoHS compliant Unit:mm		Scale	Free			Date	Name	Customer-No.		
		TOLERANCE				Drawn	26.01.2018	Winnie		
				③	Correct Brown to Purple	06.09.2018	Xavier	Approved	29.08.2018	Winnie
				②	Update	29.08.2018	Xavier			
		DIM	TOL	①	Update	07.08.2018	Xavier			
				①	Drawn	26.01.2018	Winnie			
		Angle	TOL	Id.	Modification	Date	Name			
								Drawing-No.	ASS 8186 CA	rev03
								Replace		Sheet 1 / 1
	1	2	3	4	5	6	7			