

REV	ECN	APPD
-	4807	

L=PITCH X POSITIONS

NOTES:


1. 3 POSITION SHOWN

UL
RATINGS
CURRENT - 12A
VOLTAGE - 300V
U.L. FILE NO. PENDING

SP
RATINGS
CURRENT - 12A
VOLTAGE - 300V
CSA FILE NO. PENDING

ESZPXX100

NUMBER OF POSITIONS
(02-24)

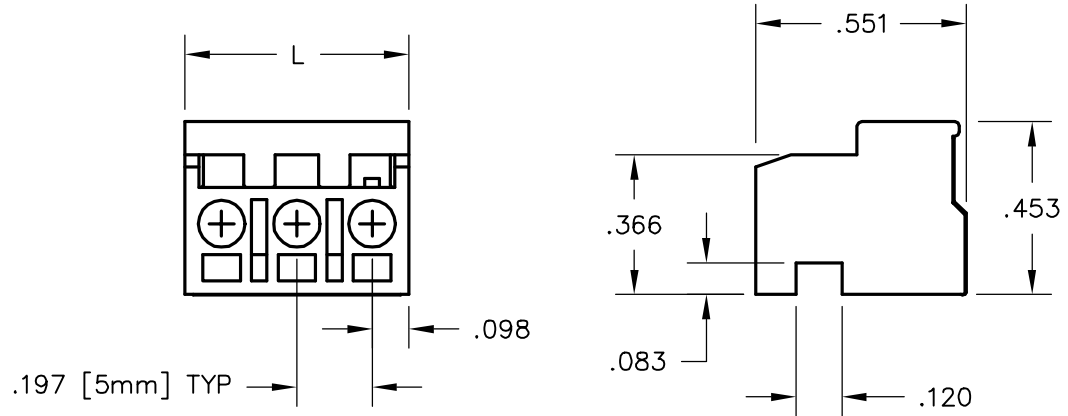

DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992

CURRENT - N/A
VOLTAGE - N/A
TUV FILE NO. N/A

INSTALLATION RECOMMENDATIONS

WIRE RANGE: 14-30 AWG
WIRE STRIP LENGTH: .160-.240
TIGHTENING TORQUE: 4.4 LB-IN.

MATERIALS

HOUSING: POLYAMIDE 6/6, COLOR: BLACK
CONTACT: COPPER ALLOY, TIN PLATED
SCREW / CAGE CLAMP: COPPER ALLOY, NICKEL PLATED

OPERATING TEMPERATURE RANGE: -40°C TO 110°C

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	SPECIFICATION DRAWING			<i>TITLE</i> ESZP SERIES STICK PIN PLUG .197 [5MM] PITCH	
			ENGR I. QUINN 2/4/02			SIZE A	DWG NO. ESZP02100
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		CHKD	APPD	CODE: 58982	SCALE: NONE	SHEET 1 OF 1