
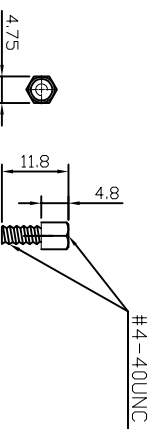


RECOMMENDED PCB LAYOUT

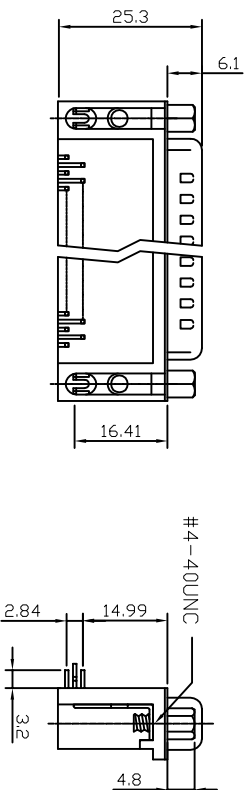

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

13.84mm Footprint

- NOTES:**
- Material : Glass-Filled Thermoplastic PBT, UL94V-0
 - Insulator : Copper alloy
 - Contact : Steel, 100u" Tin Over 50u" min Copper
 - Shell : Steel, 100u" Tin Over 50u" min Copper
 - Clinch Nut : Brass, Nickel Plated.
 - Boardlock : Brass, Tin Plated.
 - Screwlock : Steel, Nickel Plated.
- Electrical**
- Contact Resistance : 20 milliohms
 - Max at 1 AMP DC.
 - Insulation Resistance : 1000 magohms at 500 VDC
 - Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
 - Current Rating : 3AMP
 - Volatge Rating : 250 VAC/rms 60Hz

RoHS compliant

Scale	1:1								
TOLERANCE									
X.	±0.38								
X.X	±0.25								
X.XX	±0.13								
DIM	TOL								
X.°	±3°								
X.X°	±1.0°	Ⓢ	Drawn			05.11.2013	Winnie		
Angle	TOL	Id.	Modification	Date	Name				

ASSMANN
WWSW/ components

Customer-No. _____
 ASSMANN WSW-No. _____
ADSXXA-KG-TASB5
 Drawing-No. _____
ASS 6115 CO
 Replace _____
 Sheet _____

1 2 3 4 5 6 7 TS0016