



Units: mm

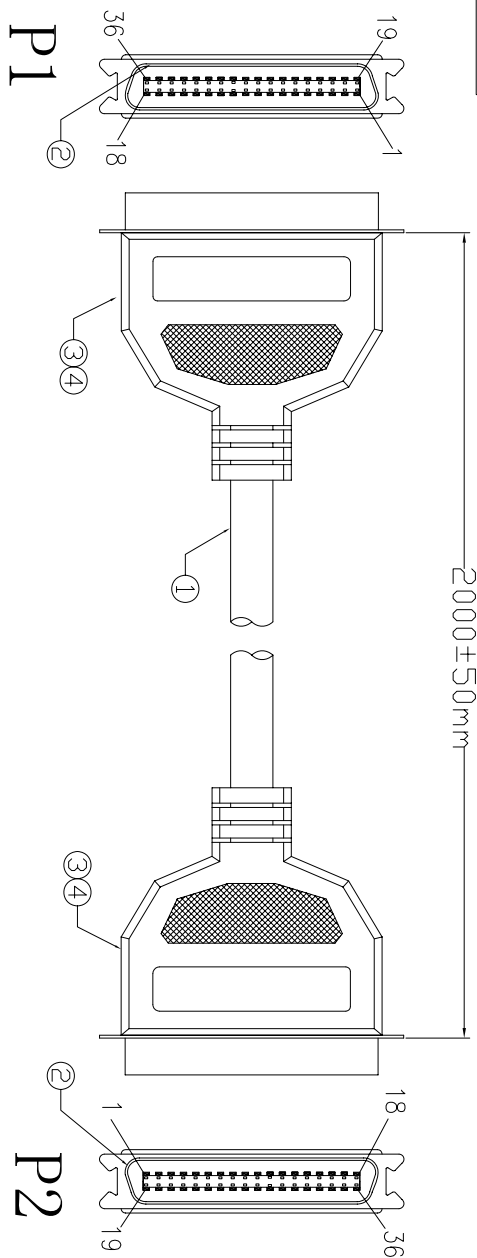

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm (max)
 3. Insulation resistance: 5m Ohm (min)
 4. dielectric test: DC 300V

PIN ASSIGNMENT				
	P1	P2	P2	
P1 1	黑	1	蓝/黑	19
P1 2	棕	2	紫/黑	20
P1 3	红	3	灰/黑	21
P1 4	橙	4	白/黑	22
P1 5	黄	5	粉红/黑	23
P1 6	绿	6	棕/白	24
P1 7	蓝	7	红/白	25
P1 8	紫	8	橙/白	26
P1 9	灰	9	绿/白	27
P1 10	白	10	蓝/白	28
P1 11	粉红	11	紫/白	29
P1 12	浅绿	12	棕红/白	30
P1 13	浅蓝	13	棕/红	31
P1 14	棕/黑	14	橙/红	32
P1 15	红/黑	15	绿/红	33
P1 16	橙/黑	16	蓝/红	34
P1 17	黄/黑	17	紫/红	35
P1 18	绿/黑	18	灰/红	36
SHELL	地	线	SHELL	

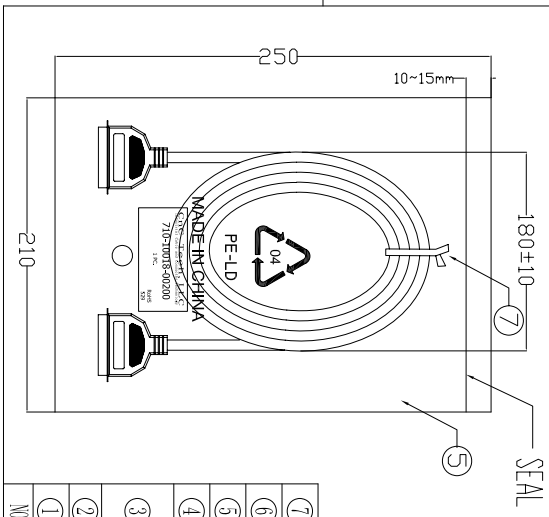

⑦	TIE	1	WHITE L=180mm
⑥	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"3PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"及印生产周期,有透气孔.
④	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.:NM-62)
②	OUT JACKET	60g	BEIGE (TV-29) 40P PVC(Mould NO. NM-145)
①	CABLE	1	MOUL 28# (7.0.12)*36C-D-HAL/NT OD:9.0mm JACKET:BEIGE (TV-29#) L=2000±30MM

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGCHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10018-00200
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	