


AFCI PART NO.

10123475-R0003YYLF

WIRING LIST		
P1		P2
1	---	1
2	---	2
3	---	3

12	---	12
13	---	13
14	---	14

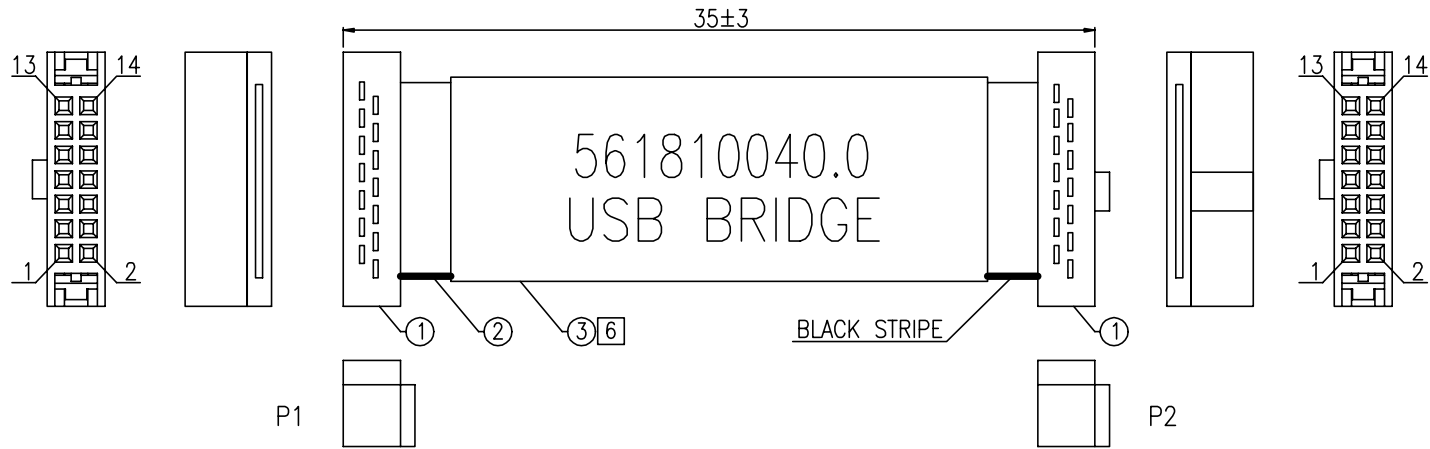

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:
 HI-POT: DC 300V/10ms
 DIELECTRIC RESISTANCE: 10M Ohms MIN.
 CONNECTION RESISTANCE: 4 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

B **6**. LABEL SHOULD BE PRINTED WITH BLACK TEXT AS SHOW BELOW:

561810040.0
USB BRIDGE

B	1	EA	ADHESIVE LABEL: W=25mm, COLOR:WHITE, PRINT BLACK			3
	A/R	FT	FLAT CABLE: UL2678, 0.635PITCH, 30AWG, 14PIN, COLOR:GRAY			2
	2	EA	IDC CONNECTOR: 1.27PITCH, 2X7PIN, 10u" Au PLATING, COLOR:BLACK			1
	Q'TY	UNIT	DESCRIPTION			ITEM
mat'l. code		surface	tolerance	projection	product family	
		ISO 1302	ISO 406 ISO 1101		Cable Assembly	
ltr	ecn no	dr	date	tolerances unless otherwise specified		title
A	/	Harry	03/08'13	angles	linear	1.27PITCH IDC CABLE ASSEMBLY
B	N-24535	Carl	07/20'16			MM
						scale N/A
		dr	Carl Wang	07/20'16	dwg no	
		enr	Carl Wang	07/20'16	sheet 1 of 1 size	
		chr	Caspar Lin	07/20'16	10123475 A3	
		appd	Caspar Lin	07/20'16	type Customer Drawing	
sheet	revision	B				
index	sheet	1				