


| REVISIONS |                             |            |
|-----------|-----------------------------|------------|
| REV       | DESCRIPTION                 | DATE       |
| H         | REVISED PER DCR NO. R060215 | 03/30/2006 |

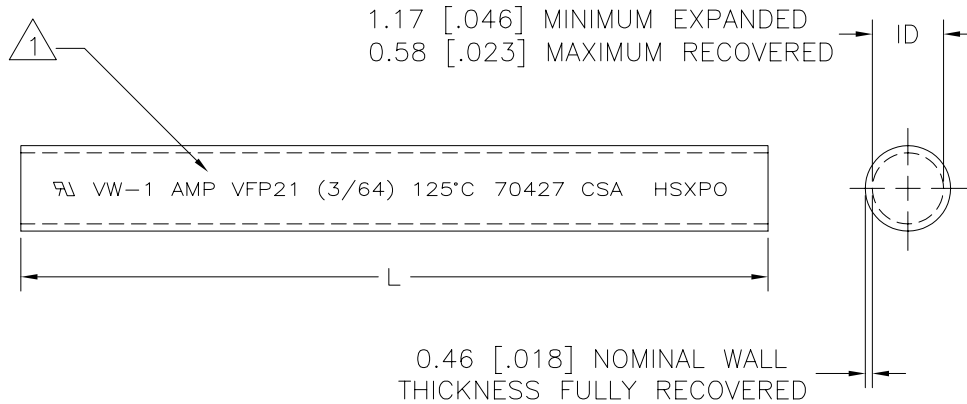

1. TUBING MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED (OPTIONAL). IF NOT PRINTED ON TUBING, PACKAGING OF TUBING MUST BE LABELED WITH APPROVED UL/CSA LABELS.

- TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.
- TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.
- WEIGHT PER LINEAR FOOT/304.8 mm: .41 g/.0009 lbs.
- MATERIAL: BLACK POLYOLEFIN

|                           |             |
|---------------------------|-------------|
| 304.8 m [1000 ft] MINIMUM | 603321-2    |
| 1.22 m [4 ft] MINIMUM     | 603321-1    |
| LENGTH L                  | PART NUMBER |

If this document is printed it becomes uncontrolled. Check for the latest revision

### SPECIFICATION CONTROL DRAWING

|  |                     |         |            |   |                    |
|--|---------------------|---------|------------|---|--------------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.<br><br>DECIMALS<br>.XX ± .01 [.0004 in ]<br>.X ± .1 [.004 in ]<br><br>ANGLES<br>.X ± 0.5 DEG | DRAWN               | UNGUYEN | 03/30/2006 | Tyco Electronics Corporation<br>300 Constitution Drive<br>Menlo Park, CA, USA 94025<br> |                    |
|  | APPROVED            | JBROOKS | 03/30/2006 |   |                    |
|  | CAD NAME<br>R060215 |         |            | TITLE<br>AMPSULATION VFP21<br>3/64 INCH ID, BLACK                                       |                    |
| THIRD ANGLE PROJECTION   |                     |         | SIZE<br>B  | CODE IDENT. NO.<br>06090  | DWG. NO.<br>603321 |
| DO NOT SCALE THIS DRAWING  |                     |         |            | SHEET 1 OF 1  |                    |