



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	"LENGTH" ±.3 [7]
MLTFC2H-LP316	50	2" [51]	7.9" [201]
MLTFC2.7H-LP316	50	2.7" [69]	10.15" [258]
MLTFC4H-LP316	50	4" [102]	14.3" [362]
MLTFC6H-LP316	50	6" [152]	20.5" [521]
MLTFC8H-LP316	50	8" [203]	26.8" [679]

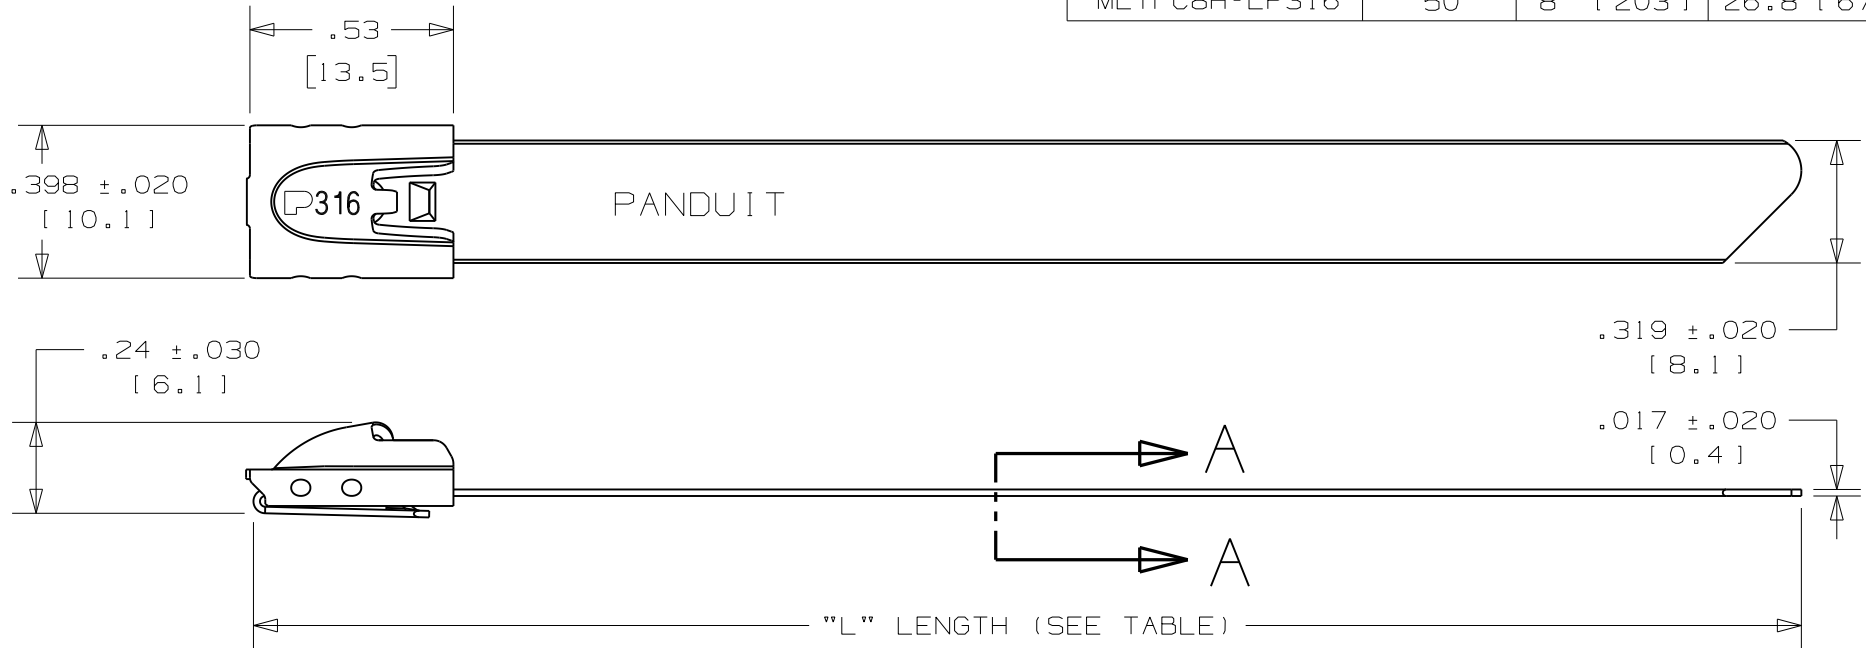

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT OR ST3MT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL
6. COATING - POLYESTER
 COATING THICKNESS: .002 MIN./ .005 MAX. PER SIDE

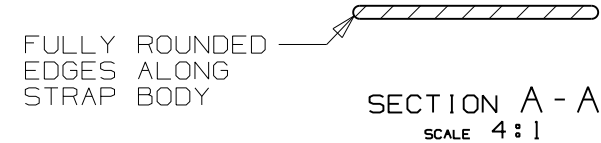

03A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY			 TINLEY PARK, ILLINOIS METAL LOCKING TIE - COATED HEAVY SERIES 316 STAINLESS STEEL (CUSTOMER DRAWING)			
02	11/05	JMMR	EJD	Ⓐ	ADDED MLTFC2.7H-LP316 TO TABLE	SS00112		---	---	
01	3/05	JAMB	PAB	DRAWING REVISED TO REFLECT CURRENT COATED HEAVY SERIES PRODUCT				12501	CCH	JJB
00	11/04	JAMB	PAB	RELEASED				12169	CCH	JJB
REV	DATE	BY	CHK	DESCRIPTION				ECN #	PM	CUST
							DRAWN BY	CHK'D	SCALE	DRAWING NO.
							JAMB	PAB	2x	N41193BS_DC