
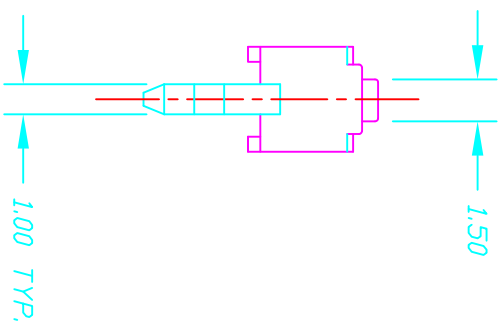


RECOMMEND P.C.B. HOLES

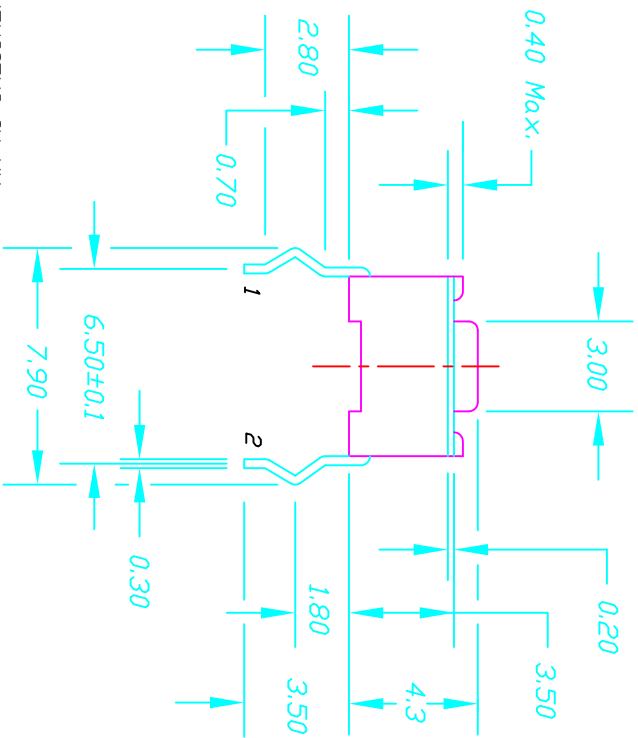

CIRCUIT: SPST

CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
  2. TERM. NOS. FOR REF ONLY
  3. RATING: DC 12V, 50mA
  4. TRAVEL: 0.25±0.1mm
  5. CONTACT RESISTANCE: 100m Ohms Max.
  6. MECHANICAL/ELECTRICAL LIFE: 30,000 CYCLES
  7. PACKAGE: BULK 1,000 PER BAG
  8. 2002/95/EC (ROHS) COMPLIANT
  9. OPERATING FORCE: 260 GRAMS



TL1107AF260W

D	ADDED NOTE 9	10/15/14	AS		
C	UPDATED NOTES	11/7/06	TN		
B	REVISED & REDRAWN				
REV.	DESCRIPTION	DATE	CHKD	SCALE	DATE
				4:1	11/7/06
			DR TN DWG		
			P010313		
			REV D		
TOLERANCES					
		±0.4			
		±0.25			
		0.0			
		0.00			
TITLE					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					