Alle Rechte vorbehalten/ *All rights reserved*

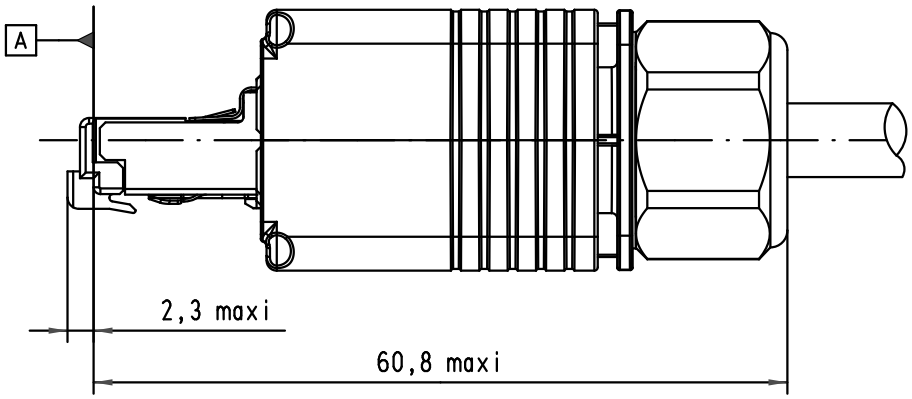


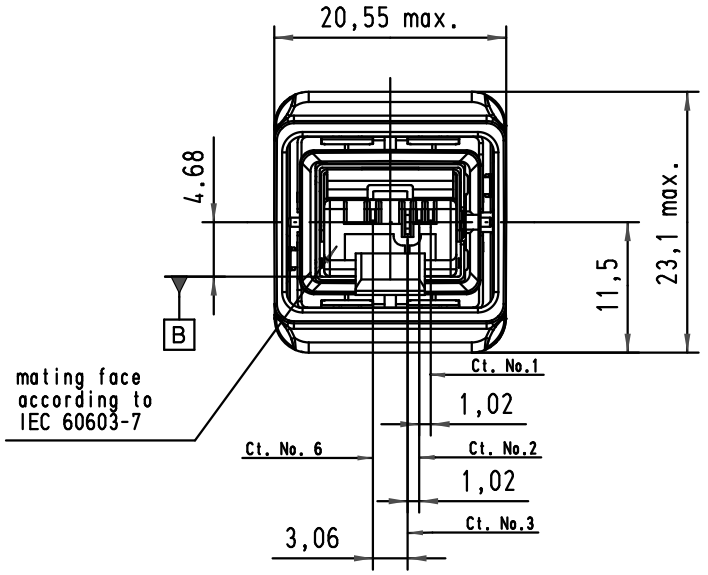


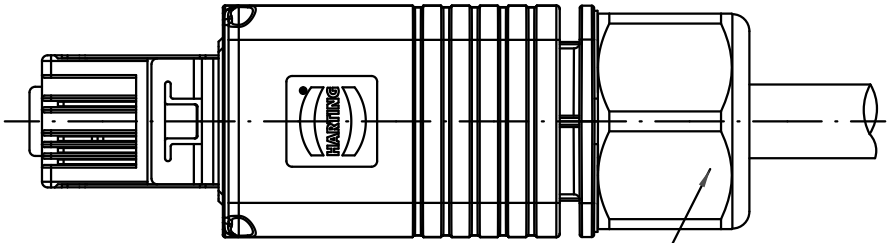


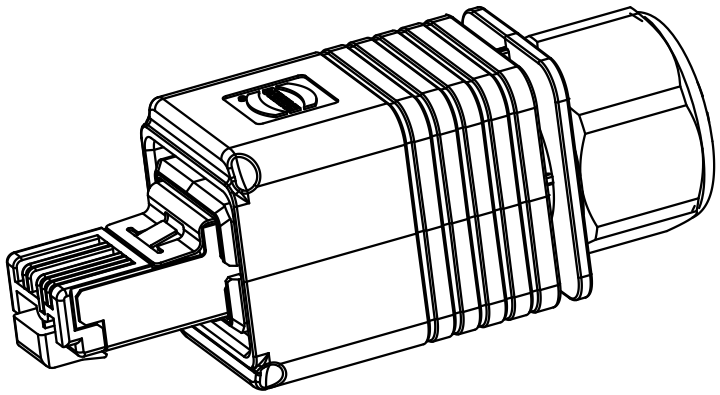

Plug according to
IEC 61076-3-106 Variant 4

Cable diameter : 4.9 to 8.6mm
AWG 22 to AWG 23 Solid &
AWG 22 to AWG 24 Stranded
With wires O.D max. 1.6mm.

| | | | | | |
|---|---|---|---|---|---|
| 09 45 195 1100 | Au: 1.27 µm over nickel | 35643 | 27/01/09 | BD |
| Part Number | Data contact plating | Mod. | Dat. | Name |

| | Dat. | Name |
|---|---|---|
| Detail. | 27/01/09 | BD |
| Insp. | | |
| Stand. | | |

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

HARTING PushPull Metal RJ45
IP65/67 Shielded Plug Cat.5
4 data contacts

TB 09 45 195 1100

Sub.

Maßstab/ *Scale* 3:2

Blatt/ *Page* 1/1