



LOC		DIST		REVISIONS				
AD	00	REV	BY	DESCRIPTION	DATE	DWN	APVD	
D		1		REVISED PER ECO-14-000069	15APR2014	NK	MM	

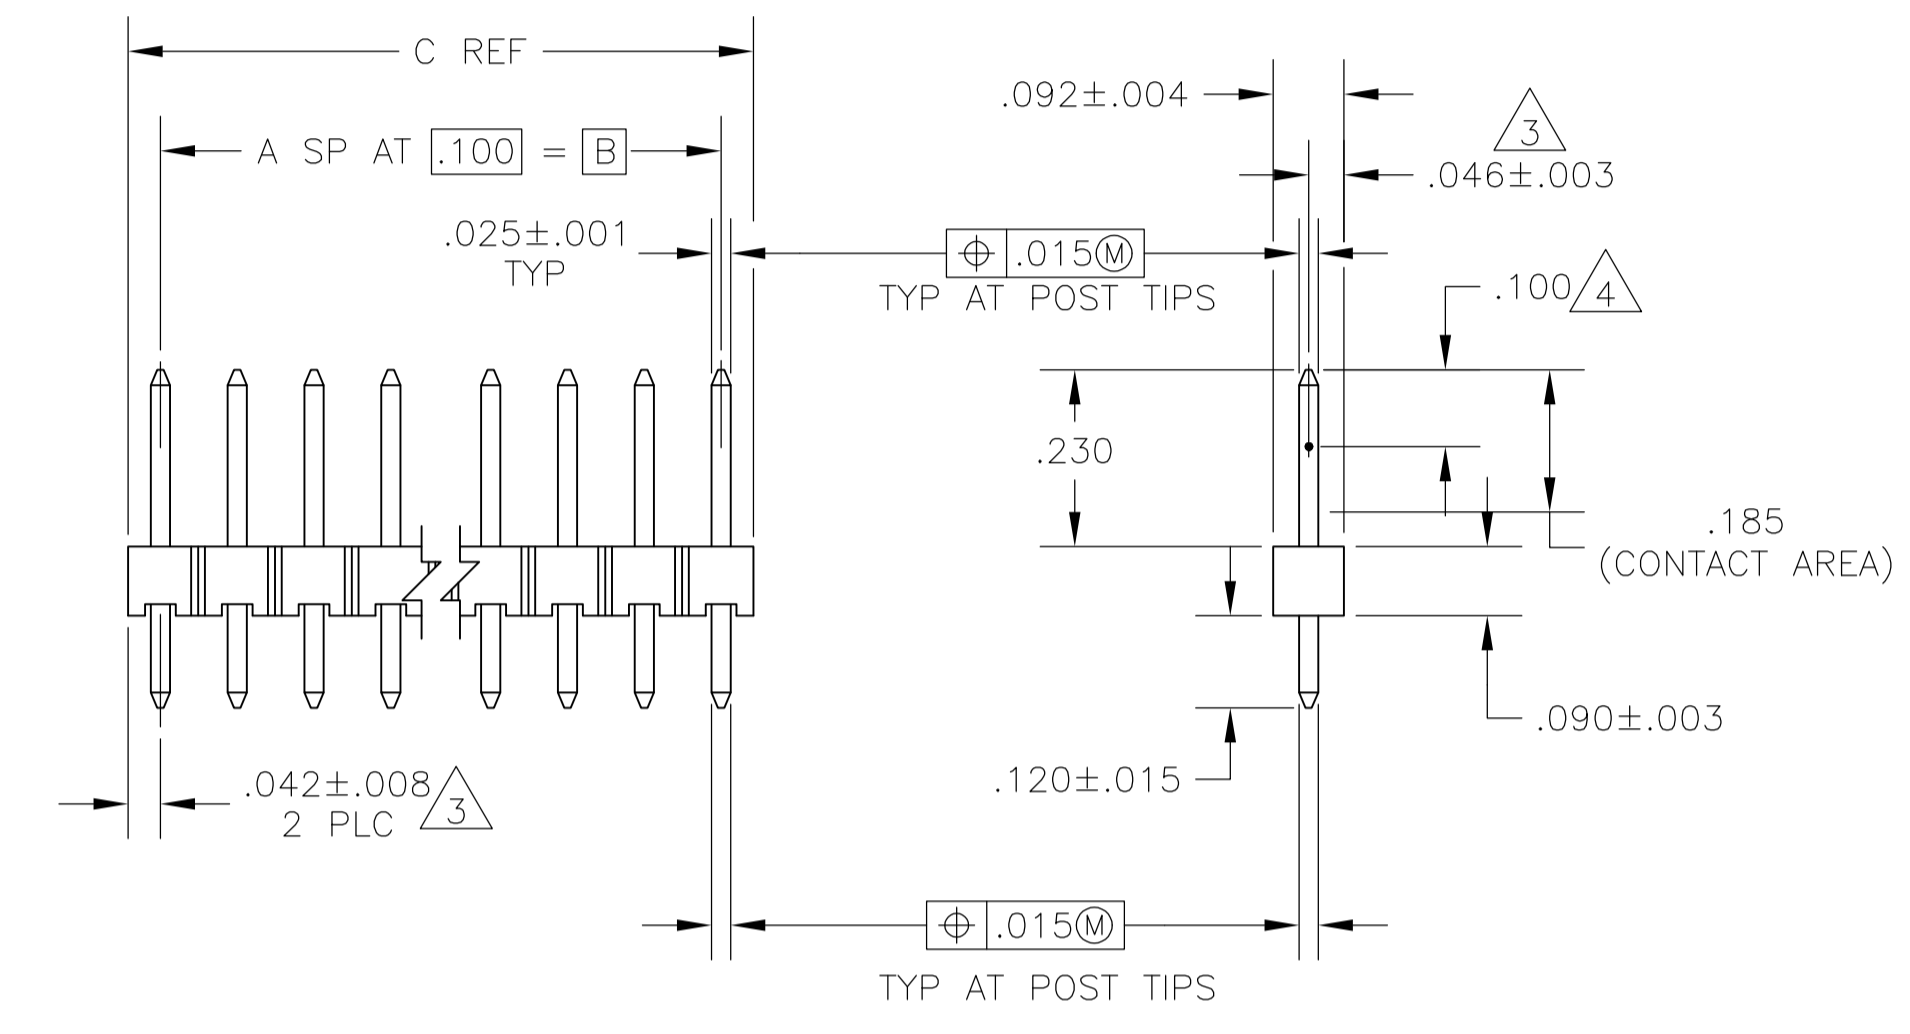

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS

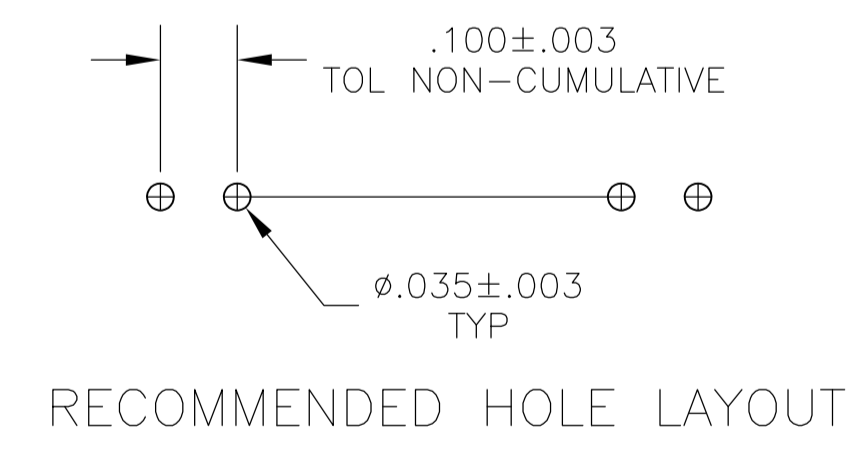

.284	.200	2	3	1571839-2
.184	.100	1	2	1571839-1
C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -
MATERIAL: HOUSING: FRAME BETWEEN HIGH TEMPERATURE THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY		FINISH: PARTS: 000030 0003 ON CONTACT SURF. 0001 100 000000 ON SURF. IN CONTACT WITH TN 000050 NICKEL		WEIGHT: -		SIZE: A1	

DIN: R BROWN 24MAY04  
 CHK: J GESFORD 24MAY04  
 APVD: R BENDORF 24MAY04  
 NAME: R BENDORF  
 PRODUCT SPEC: -  
 APPLICATION SPEC: -  
 SCALE: 4:1 SHEET 1 OF 1 REV D

**STE** TE Connectivity  
 HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, .025 SQUARE POSTS, LEAD-FREE, HIGH TEMP  
 CUSTOMER DRAWING