


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
1/12/08	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

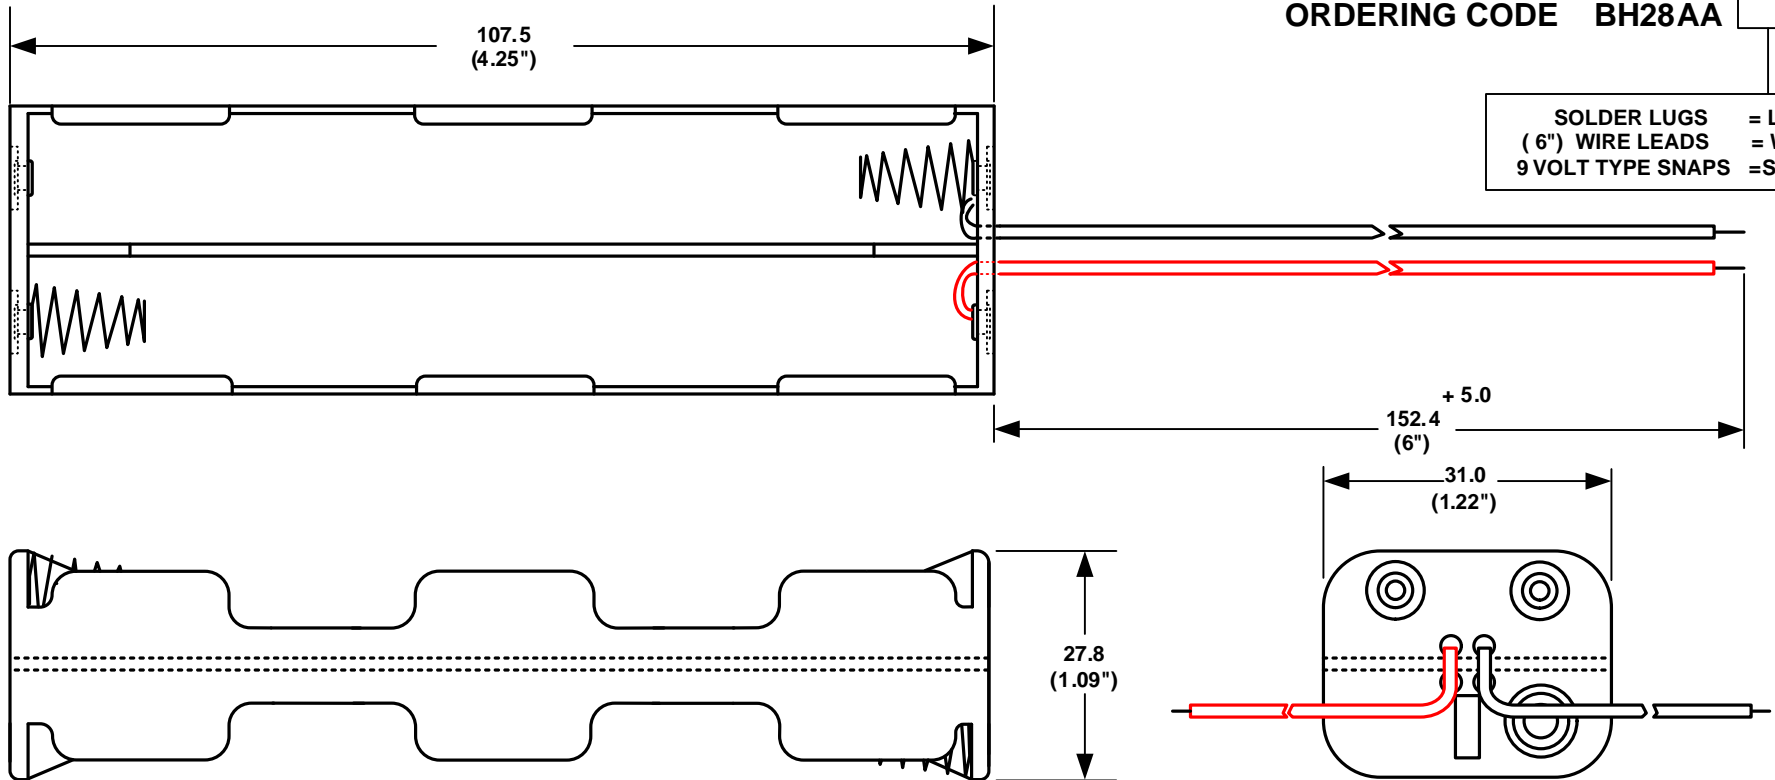

ORDERING CODE BH28AA


SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS = SF

WIRE LEADS SHOWN ABOVE

SPECIFICATIONS :

- Plastic material - polypropylene
- Flammability Rating-UL94 HB, UL File No. E216959
- Temperature Range: -10°C to +100°C
- Springs - nickel plated spring steel
- Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated
- Contact Resistance: Under 50m Ω for +/- contacts per EIA-540J000
- ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	EIGHT "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	1/12/2008	BH28AAW	