








PART NO.


10116040-001LF

NOTES:

- MATERIAL:
HOUSING: HIGH PERFORMANCE RESIN, GLASS FILLED, UL94 V-0, COLOR: NATURAL.
TERMINAL: TI-CU ALLOY.
CAP: STAINLESS SLEEVE.
HOLDDOWN: STAINLESS SLEEVE.
- FINISH:
TERMINAL:
CONTACT AREA: GOLD PLATED 30u" MIN.
ALL AREA: GOLD PLATED 1u" MIN.
UNDER NICKEL PLATED 50u" MIN.
HOLDDOWN:
ALL AREA: GOLD PLATED 1u" MIN.
UNDER NICKEL PLATED 50u" MIN.
- NORMAL FORCE: 1.25N Min. FOR 1.6mm COMPRESSION.
- THE PRODUCT SPEC. PLS. REFER TO GS-12-674.
- THE PACKING SPEC. PLS. REFER TO GS-14-1545.
- THE SUFFIX "LF" MEANS FOR LEAD FREE PROCESS.

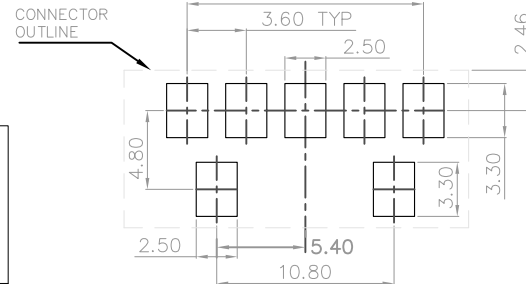
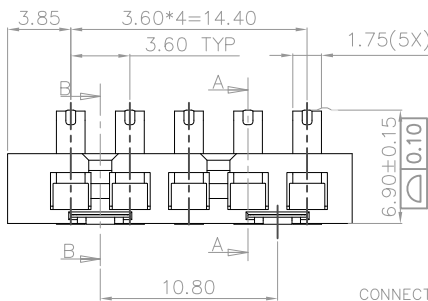
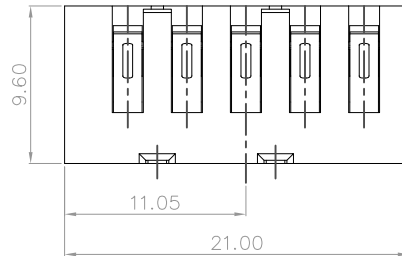
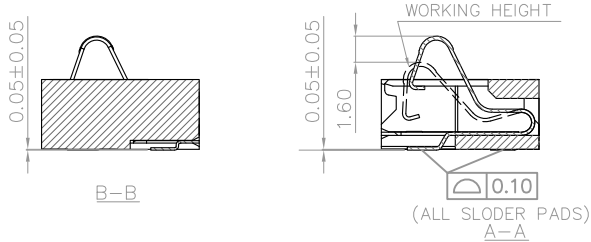


RECOMMENDED P.C.B. LAYOUT
TOLERANCE: +/- 0.05

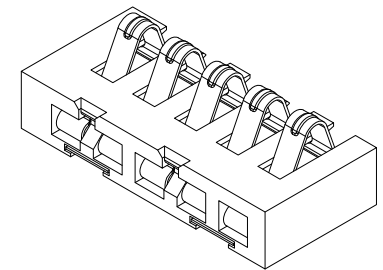

A

A

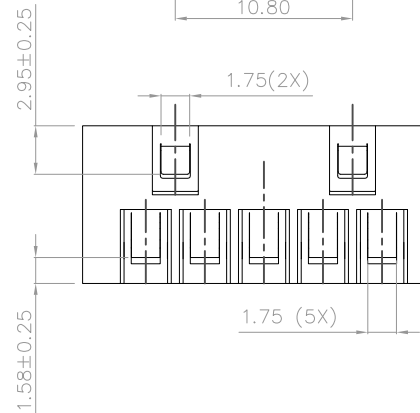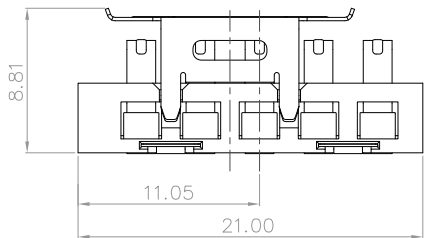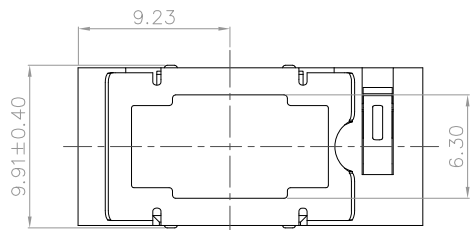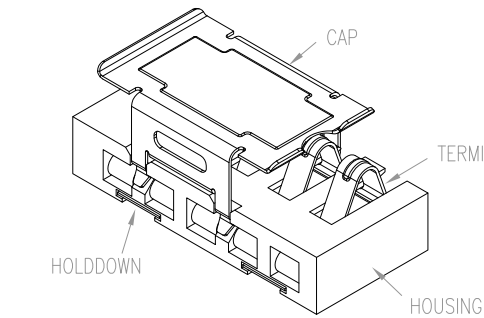

B

5

mat'l. code		surface ASME Y14.5		tolerance ASME Y14.5		projection MM		product family BATTERY	
ltr ecn no dr date		tolerances unless otherwise specified		angles		scale		title 5 PINS 3.60mm PITCH BATTERY CONNECTOR	
A	T10-0130	LS	01-19-11	line	.X±0.25			dwg no 10116040	
				line	.XX±0.15			sheet 1 of 1 size A4	
				line	.XXX±0.10			type CUSTOMER Drawing	
				dr	LEIF SHEN	01-19-11			
				enr	LEIF SHEN	01-19-11			
				chr	GARY HSIEH	01-19-11			
				appd	JOSEPH HSIA	01-19-11			
sheet index	revision	A							
	sheet	1							

B