
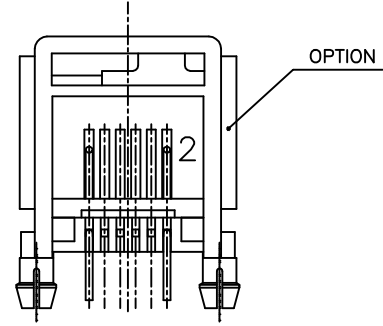


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

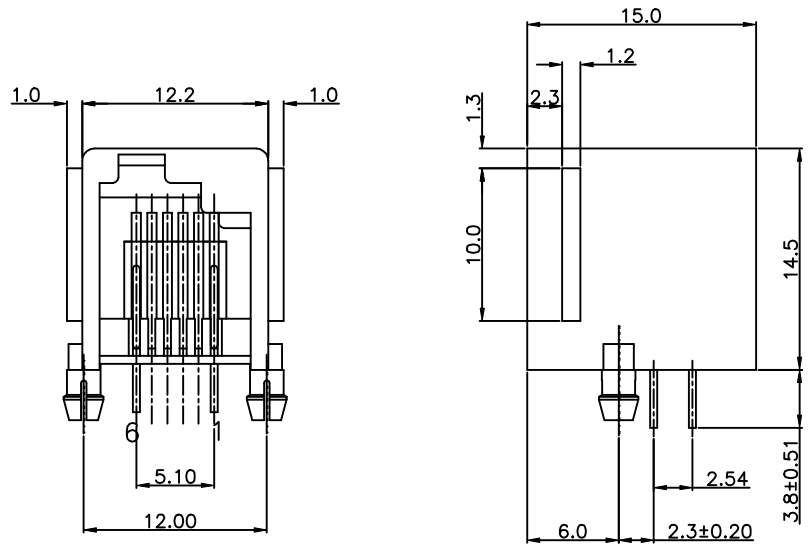

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL : PBT+20%.G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230°C~250°C (3~5 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E5562-D8L01X-L

1- 3u" 2- 6u" 3-15u"  
4-30u" 5-50u"

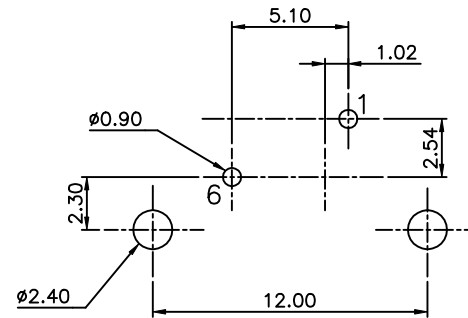

T=1.60

PC Board Layout Component Side Shown

DETACHED LISTS	← MM (INCH) →		DFTO Qianpu	DATE 4/15/05'	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKDYCAN	DATE 2005/4/18		
	MM	±	MFO	DATE	TITLE DEC TYPE L/P PCB JACK	
	.0 ±0.2	±	APPVLLUSHENG	DATE 2005/4/18		
.00 ±0.15	±	MATERIAL :		DRAWING NO. GE553066-LC		
.000 ±0.075	±	ANGLES ± 0.5		/PART NO. SEE NOTE		
THIRD ANGLE PROJECTION		QT'Y :		SIZE A3		
		FINISH :		REV 0		
		SCALE : 3 : 1		DO NOT SCALE DRAWING		
				SHEET OF		