

SPECIFICATION SHEET

55FB1424

CABLE, ELECTRIC, FILTER LINE - ELECTROLOSS™  
TWO COMPONENT

5 December 1985

150°C


Revision D

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55F.

COMPONENT WIRES - 55FA0414

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,  
MODIFIED CONDUCTIVE ETFE

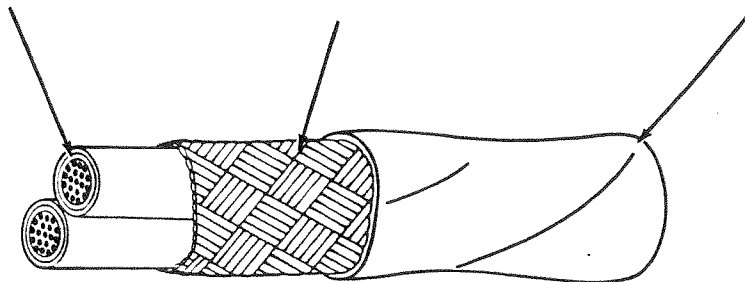

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft.)
			MINIMUM	NOMINAL <u>1/</u>	NOMINAL <u>1/</u>	MAXIMUM	
55FB1424-26-*	26	38	.006	.008	.133	.140	13.7
55FB1424-24-*	24	38	.006	.008	.139	.146	15.1

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

BLOCKING: 200 ± 3°C for 6 hours

COLOR STRIPING DURABILITY: 125 cycles (250 strokes) (minimum), 500 grams weight

CROSSLINKING PROOF TEST (ACCELERATED AGING): 300 ± 3°C for 7 hours

FLAMMABILITY: 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue

IDENTIFICATION DURABILITY: 125 cycles (250 strokes) (minimum), 500 grams weight

IMMERSION: 5% (maximum) diameter increase, no cracking of jacket

JACKET COLOR: Black

JACKET CONCENTRICITY: 70% (minimum)

JACKET ELONGATION AND TENSILE STRENGTH: Elongation, 50% (minimum)

Tensile Strength, 3500 psi (minimum)

JACKET FLAWS: Not Applicable

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: Oven temperature, 150 ± 3°C .125 in. (maximum)

VOLTAGE WITHSTAND (DIELECTRIC): Conductor to conductor and shield, 1500 volts (rms), 60 Hz

VOLTAGE WITHSTAND (POST-ENVIRONMENTAL): Not Applicable

PART NUMBER:

The "\*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681; except that violet shall be light violet and the designator shall be 7L; with a slash separating component wire colors and a dash separating the component wire colors from the jacket color.  
Example: AWG 24, light violet component wires; black jacket: 55FB1424-24-7L/7L-0.

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
4151 361 3333 TWX 910 373 1205

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.