

## DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail module, empty, for 12 x ST simplex

DIN rail module, 12 x ST simplex, without pigtails and splice comb

### Product Description

DIN rail module, for 12 x ST simplex, front plate fitted with 6 x multimode hybrid coupling (SC duplex to ST), without pigtails and splice holder. Housing (2-piece) for fixing on the DIN rail, integrated rack for accommodating excess lengths of fiber (protection), cable entry possible by means of M20 x 1.5 screw connection on top/bottom (screw connection available as an option). Ready for DIN rail mounting by means of adapter on the back, ready for equipotential bonding.

Supplied as standard: DIN rail housing, empty (2-piece), front plate with port marking and integrated splice comb (mounted), front plate fitted with 6 x ST/SC duplex coupling (hybrid) metal.

### Product Features

- Cable entry possible by means of M20 x 1.5 screw connection on top and bottom
- Suitable for industrial applications
- Compact dimensions despite large splice comb
- Snap-in adapter for easy DIN rail mounting
- Ready for equipotential bonding



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	840.0 g
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Mechanical characteristics

Number of slots	12
Connection profile	ST / BFOC (ST®) connectors

## DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

### Technical data

#### Mechanical characteristics

Fiber type	GOF
Fiber	50/125 µm OM2
Ferrule diameter	2.50 mm
Insertion/withdrawal cycles	> 500
Type of contact	Fiber optics connectors
Max. cable diameter	M20 x 1.5 cable gland
External cable diameter	depending on optional cable gland
Type of cable	For all common cable types
Color	light grey RAL 7035
Mounting type	DIN rail mounting

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (according to IEC 61300-2)
Ambient temperature (storage/transport)	-25 °C ... 70 °C (according to IEC 61300-2)
Degree of protection	IP20

#### Material data

Flammability rating according to UL 94	V0
Housing material	Sheet steel
Housing surface material	Powder-coated, gray

#### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

### Classifications

#### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 8.0	19170105


#### ETIM

ETIM 4.0	EC000731
ETIM 5.0	EC000731

### Drawings

## DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

Dimensional drawing

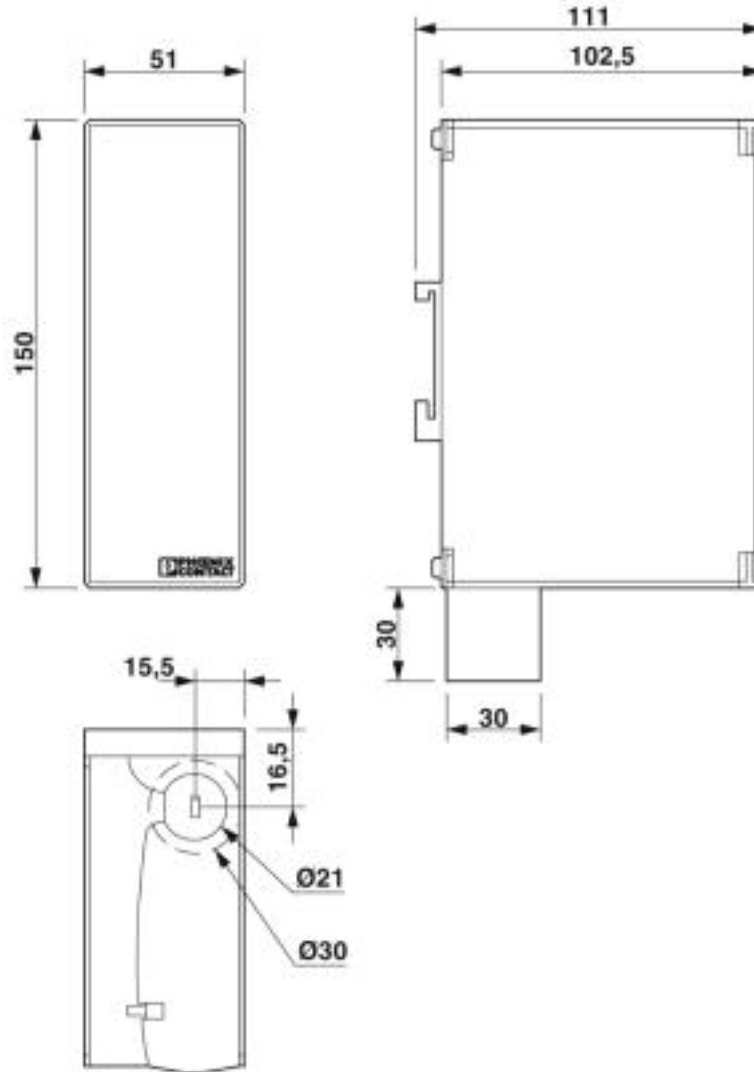

DIN rail module, 6 x ST/SC duplex (hybrid), without pigtaills