


used for: DIN EN 60603 TYPE "R"




NOTES:

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10569X CONEC ABC

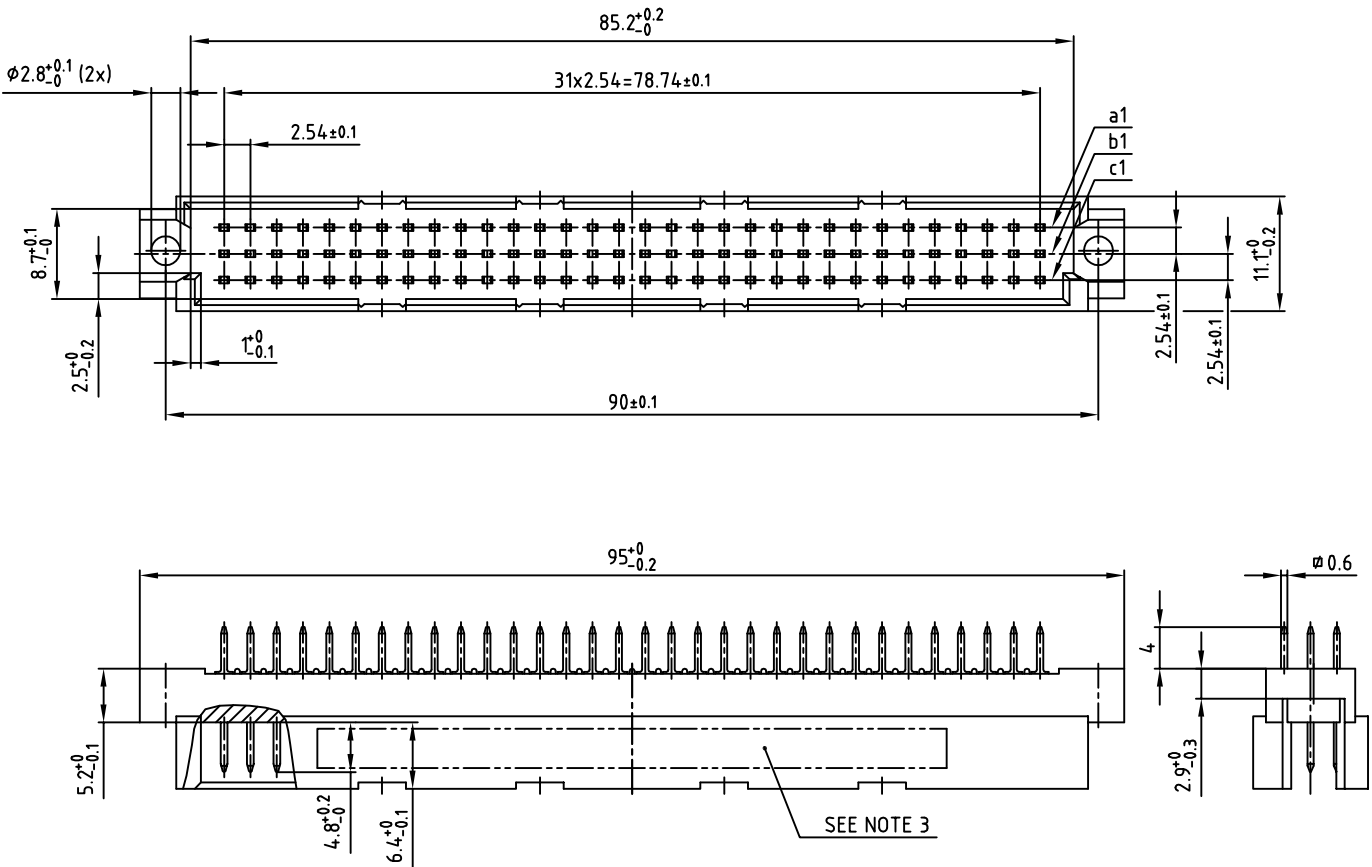

P.C.B. HOLE DRILLINGS

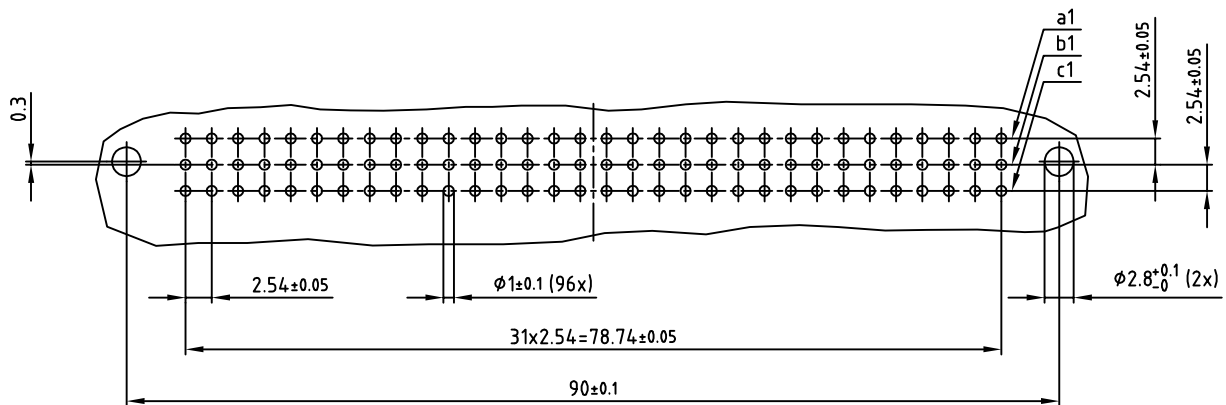

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		scale:	
		2:1	
		material:	
		SEE NOTES	
		title:	
		MALE CONNECTOR TYPE "R" 96pos. SOLDER PIN	
		dwg no:	
		AutoCAD 2004	
		part no:	
		121A10569X	

material:		scale:	
		2:1	
		title:	
		MALE CONNECTOR TYPE "R" 96pos. SOLDER PIN	
		dwg no:	
		AutoCAD 2004	
		part no:	
		121A10569X	



dwg no:		part no:	
		121A10569X	
		sh: 1/1	
		3	