
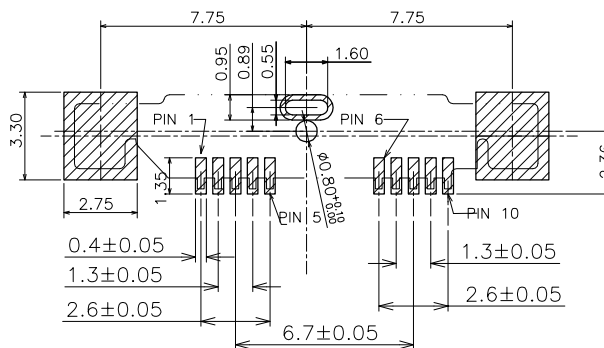





REVISION RECORD		
REV	DESCRIPTION	DRFT

H  
G  
F  
E  
D  
C  
B  
A

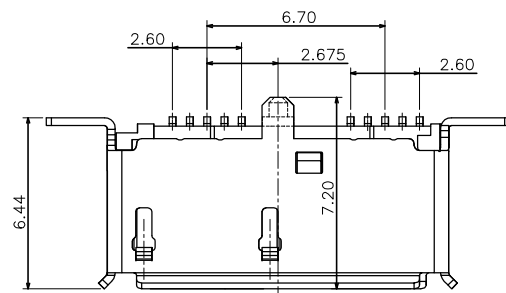


NOTES:

- MACHANICAL CHARACTERISTICS:  
 MATING FORCE: 1.30±0.30kgf.  
 UNMATING FORCE: 1.30±0.30kgf.  
 DURABILITY: 10000 CYCLES
- ELECTRICAL CHARACTERISTICS:  
 CURRENT RATING:1.5A  
 CONTACT RESISTANCE:30mΩMax.  
 DIELECTRICAL WITHSTANDING:100V AC/1min.  
 INSULATION RESISTANCE:100MΩ
- MATERIAL:  
 PLASTIC:LCP WITH 30% GF,UL 94V-0 ,BLACK.  
 TERMINAL:BRASS, T=0.15mm  
 TERMINAL PLATING:  
 50u" NICKEL UNDERPLATING OVER ALL,  
 15u" GOLD PLATING ON THE CONTACT AREA  
 100u" TIN PLATING ON THE SOLDER AREA  
 SHIELD: STEEL 0.3 THICKNESS.  
 SHIELD PLATING: 50~120u" NICKEL PLATING OVER ALL
- OTHERS:  
 OPERATION TEMPERATURE: -20°C to +80°C

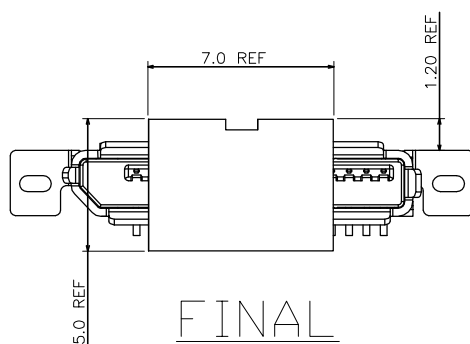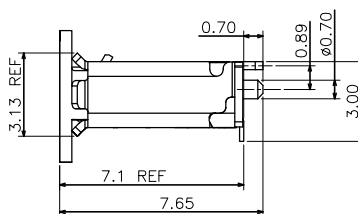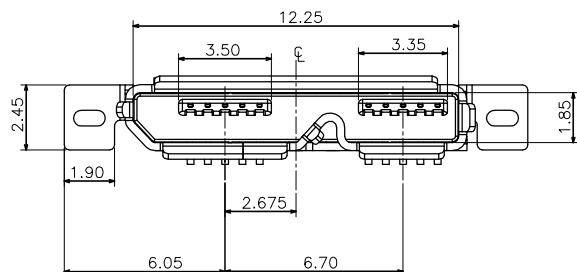

FINAL

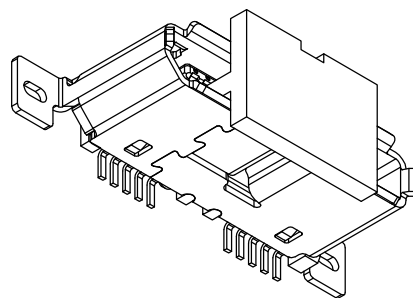

DETACHED LISTS	MM (INCH)	DFTD Roy	DATE 11/20/2012		<b>RoHS Compliant</b>	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
	MM	±	APPVL	DATE	TITLE USB 3.0 Micro BF SMD SHORT BODY	
	.0 ± 0.35	±	MATERIAL :			
.0 ± 0.25	±	ANGLES: X*±1° X.X*±0.5°		DRAWING NO. E8110-033-01		
.00 ± 0.15	±	THIRD ANGLE PROJECTION		/PART NO. E8110-033-01		
.000 ± 0.05	±	SCALE : 1:1		SIZE A3		
DO NOT SCALE DRAWING				REV 01		
SHEET 1				OF 1		