


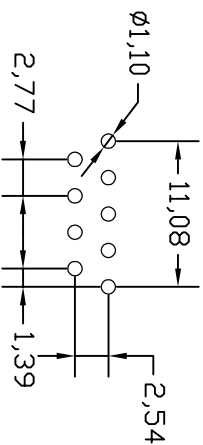
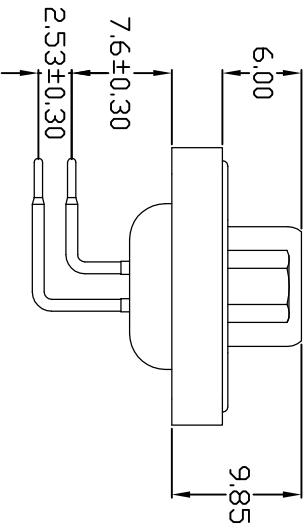
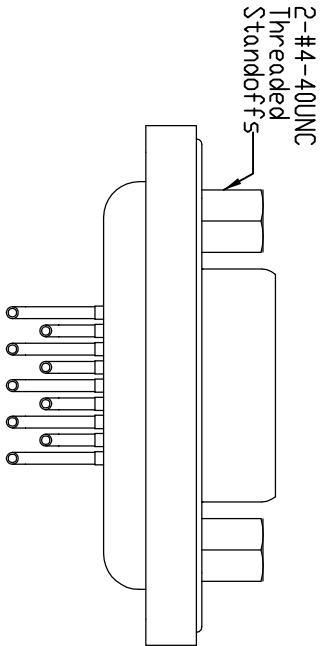


THIS IS A CAD GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

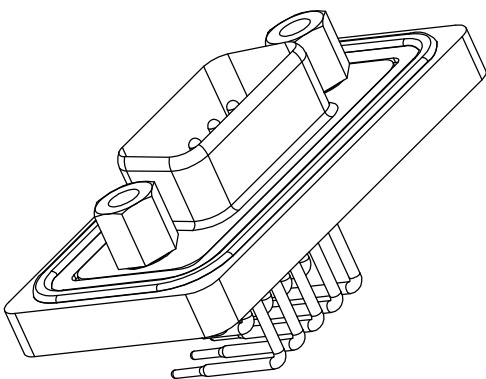

ISSUE NUMBER
ORIGINAL

①

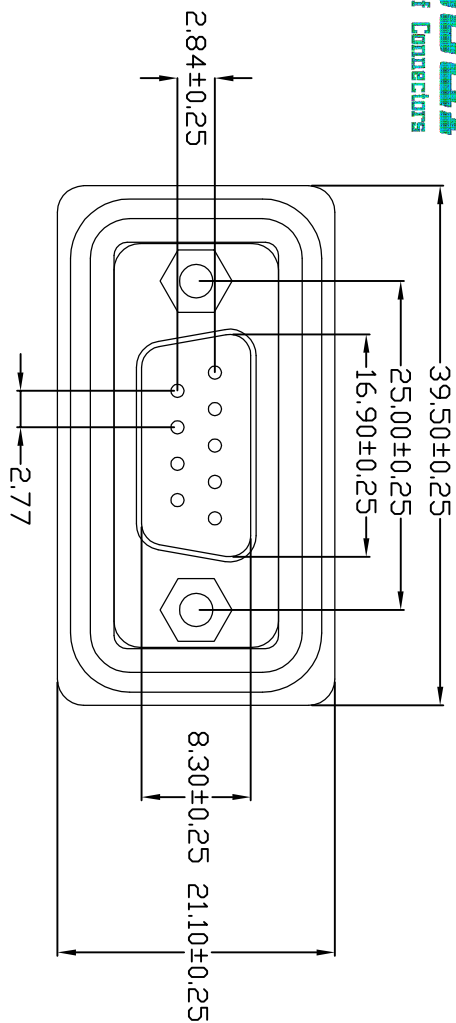

- Materials and Finish**
- Insulator: PBT with Glass Fiber, UL94V-0, Black
 - Shell: Steel, Nickel Plated
 - Contact: Copper Alloy, with 2-Gold Flash Plating over Nickel
 - Watertight Frame: PBT with Glass Fiber, UL94V-0, Black
 - O-Ring: Silicone
 - Epoxy Sealant: Epoxy
 - DEGREE OF PROTECTION: IP67 AS PER IEC60529

Electrical Characteristics

- Current Rating: 5 Amperes
- Dielectric Withstanding Voltage: 1000 V, for 1 Minute
- Insulation Resistance: 5000 Megohm Min.
- Contact Resistance: 10 Milliohms Max.
- Temperature Range: -25C to +85C

Mounting Option
2- #4-40 UNC THREADED HOLE

Contact Code
40- RIGHT ANGLE TAIL, 10.3 L406J, STANDARD FOOTPRINT




THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES
2011/65/EU FOR ROHS COMPLIANCY.

Standard Density Waterproof D-Sub Connector

PART NUMBER: 629-W09-240-012

PLUG

EDAC INC



TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 627-629W Assembly

DRAWN: RSTAMONDICA DATE: June 4/13

CHECKED: DATE:

SCALE: NTS SHEET 1 OF 1

DRAWING NUMBER 627-629W Assembly

ISSUE 1