MATERIALS AND FINISHES

BODY: ZINC ALLOY
PLATED NICKEL

CRIMP TUBE, JAM NUT: BRASS
PLATED NICKEL

CENTER CONTACT: PHOSPHOR BRONZE
PLATED TIN

CABLE CONTACT: BRASS
PLATED TIN

INSULATOR: POLYPROPYLENE, TEFLON

LOCK WASHER: PHOSPHOR BRONZE
PLATED NICKEL

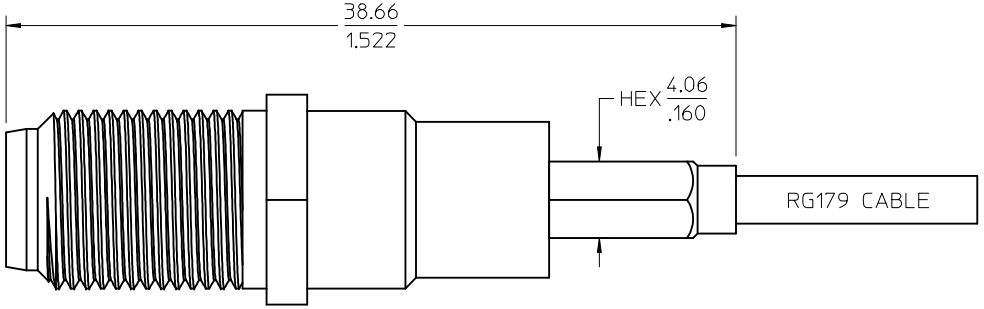





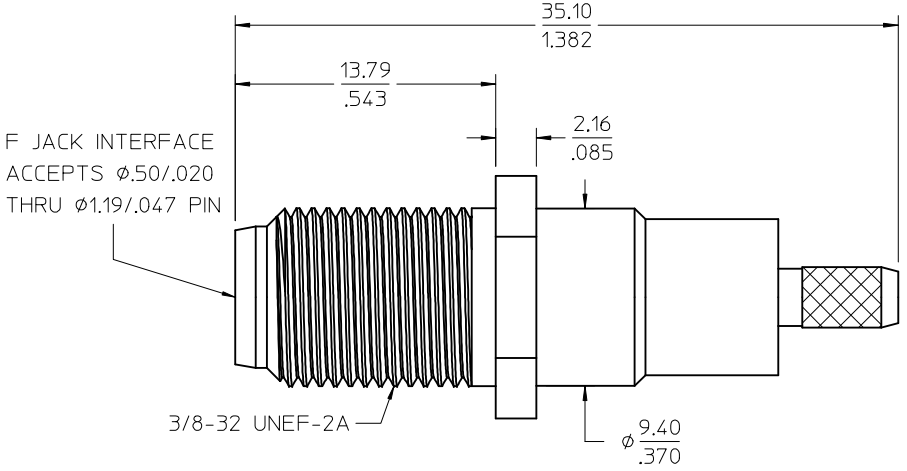

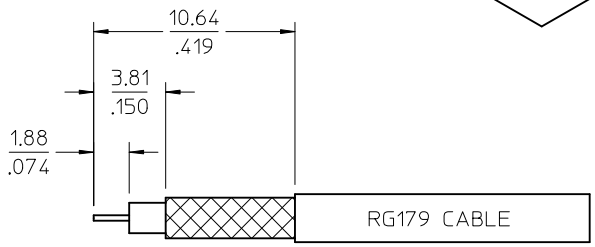

RECOMMENDED STRIP DIMENSION



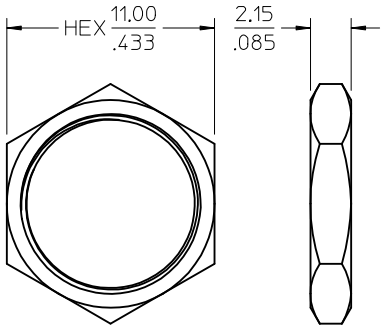

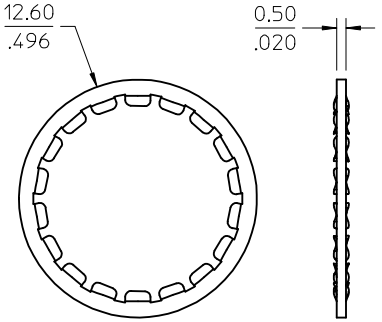

73356-0180	BULK
PART NO	PACKAGING

AS-89678-3400	CABLE ASSEMBLY INSTRU
PS-89675-1710	ELEC/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: UPDATED VIEWS PER RF14-E031
EC NO: URF2014-0120 2013/10/04
DRWN:RYEH
CH'KD:
APPR:MHUANG 2013/10/23
DESCRIPTION
A5
REV

QUALITY SYMBOLS
E =0
E =0
E =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	SSS	2000/08/18
CHECKED BY	TEF	2000/08/18
APPROVED BY	GMH	2000/08/18

TITLE: F JACK STR BKHD W/O D-FLAT FOR RG179 F-J/CABLE

molex

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-73356-018
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION