

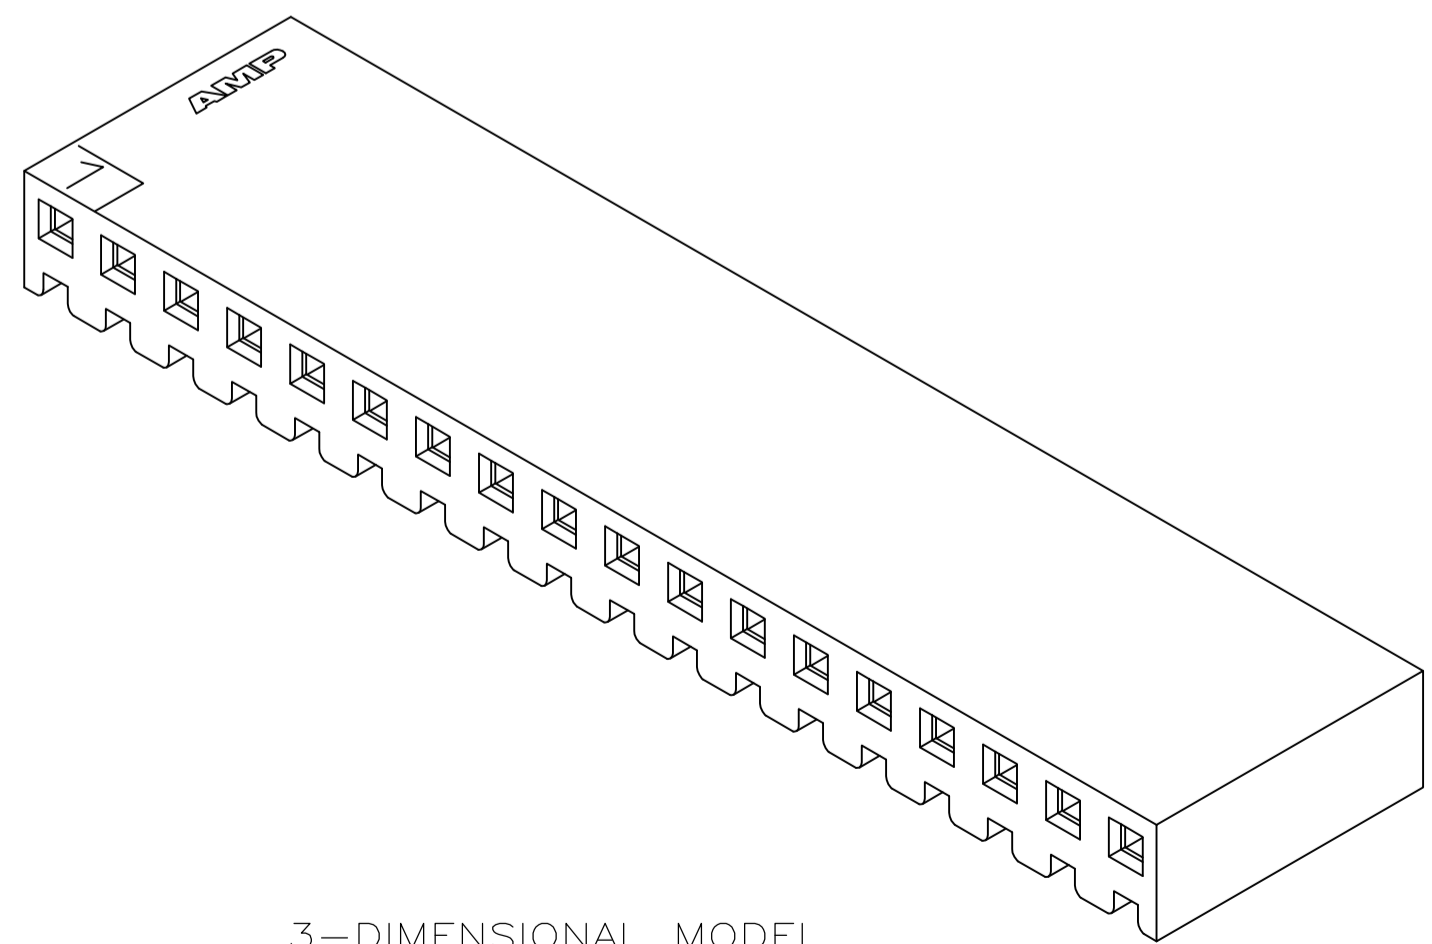
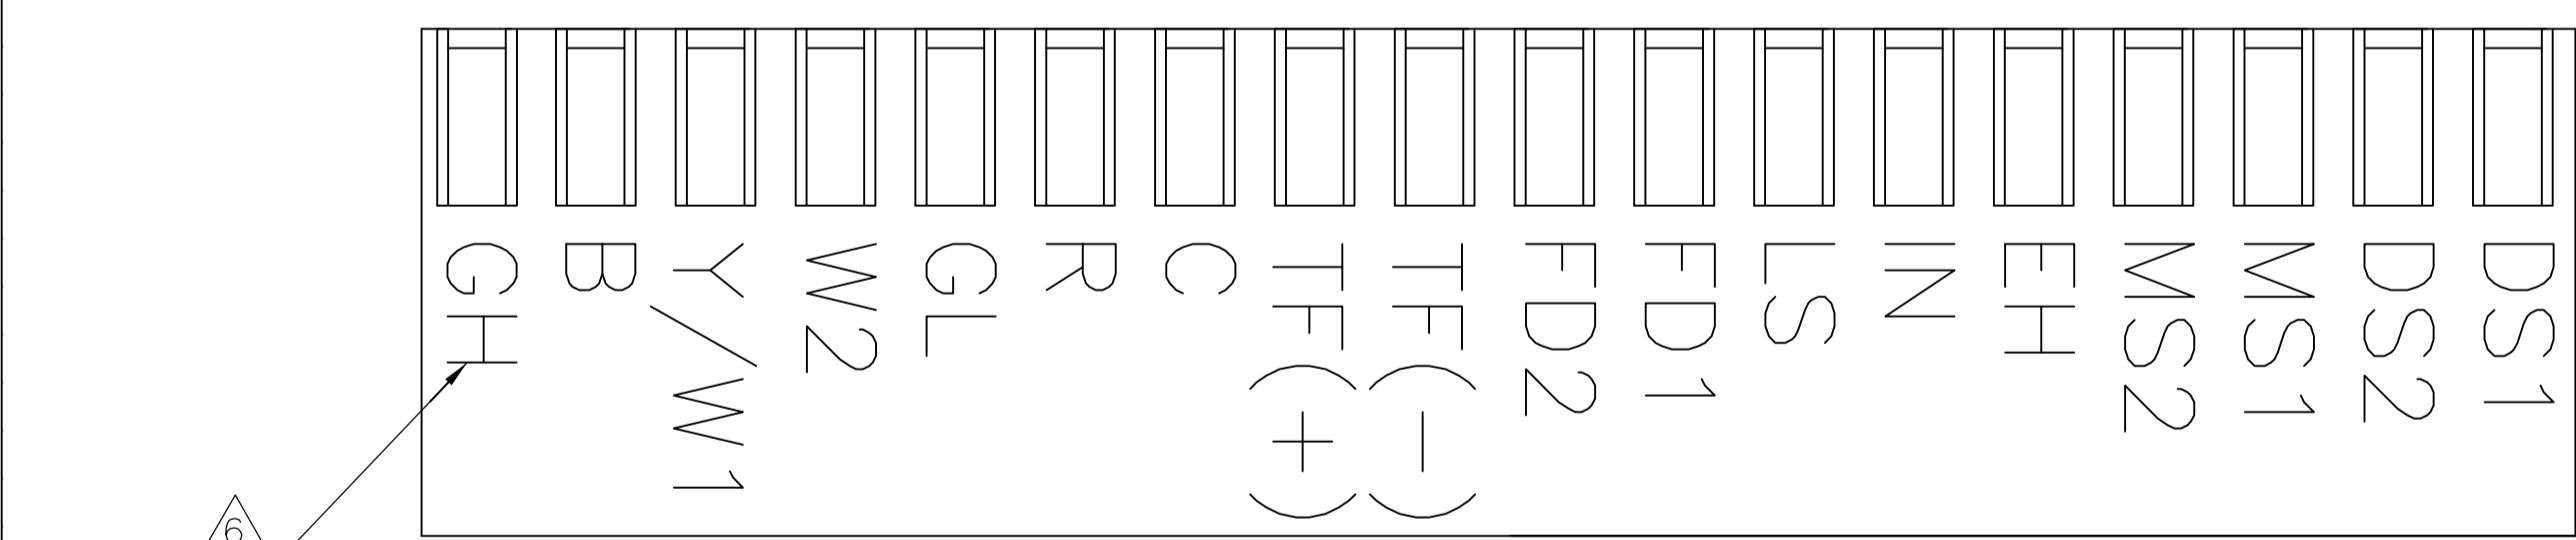
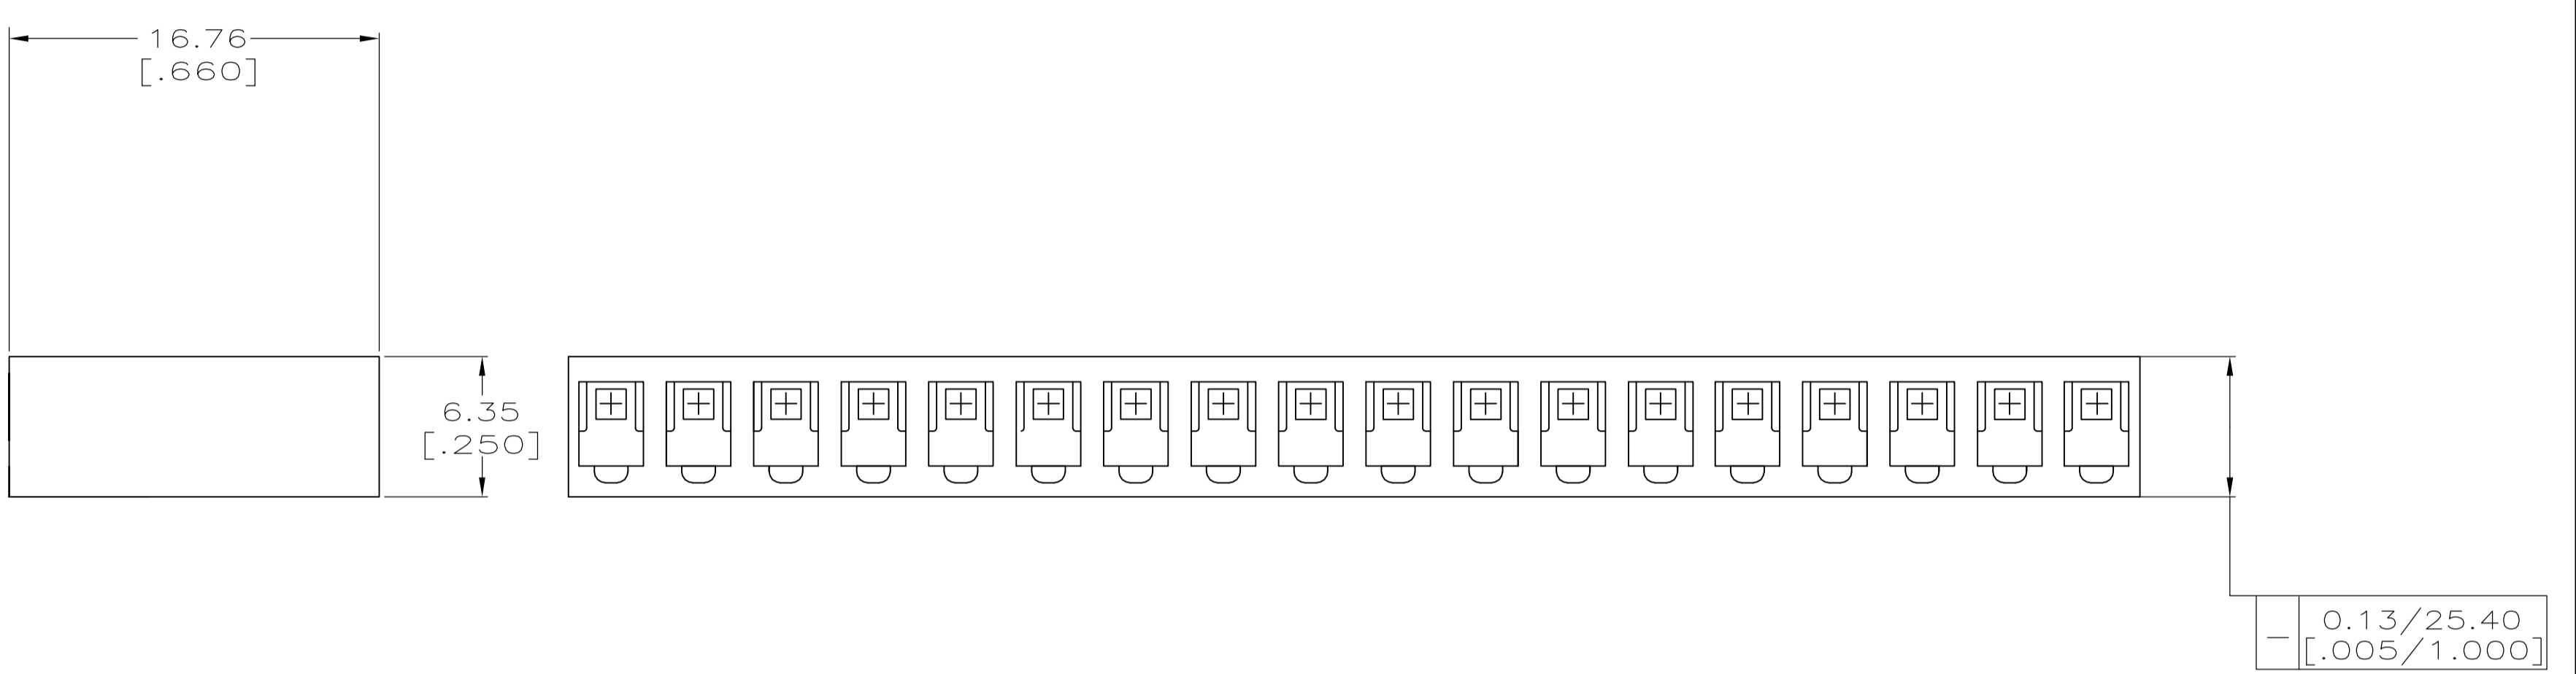
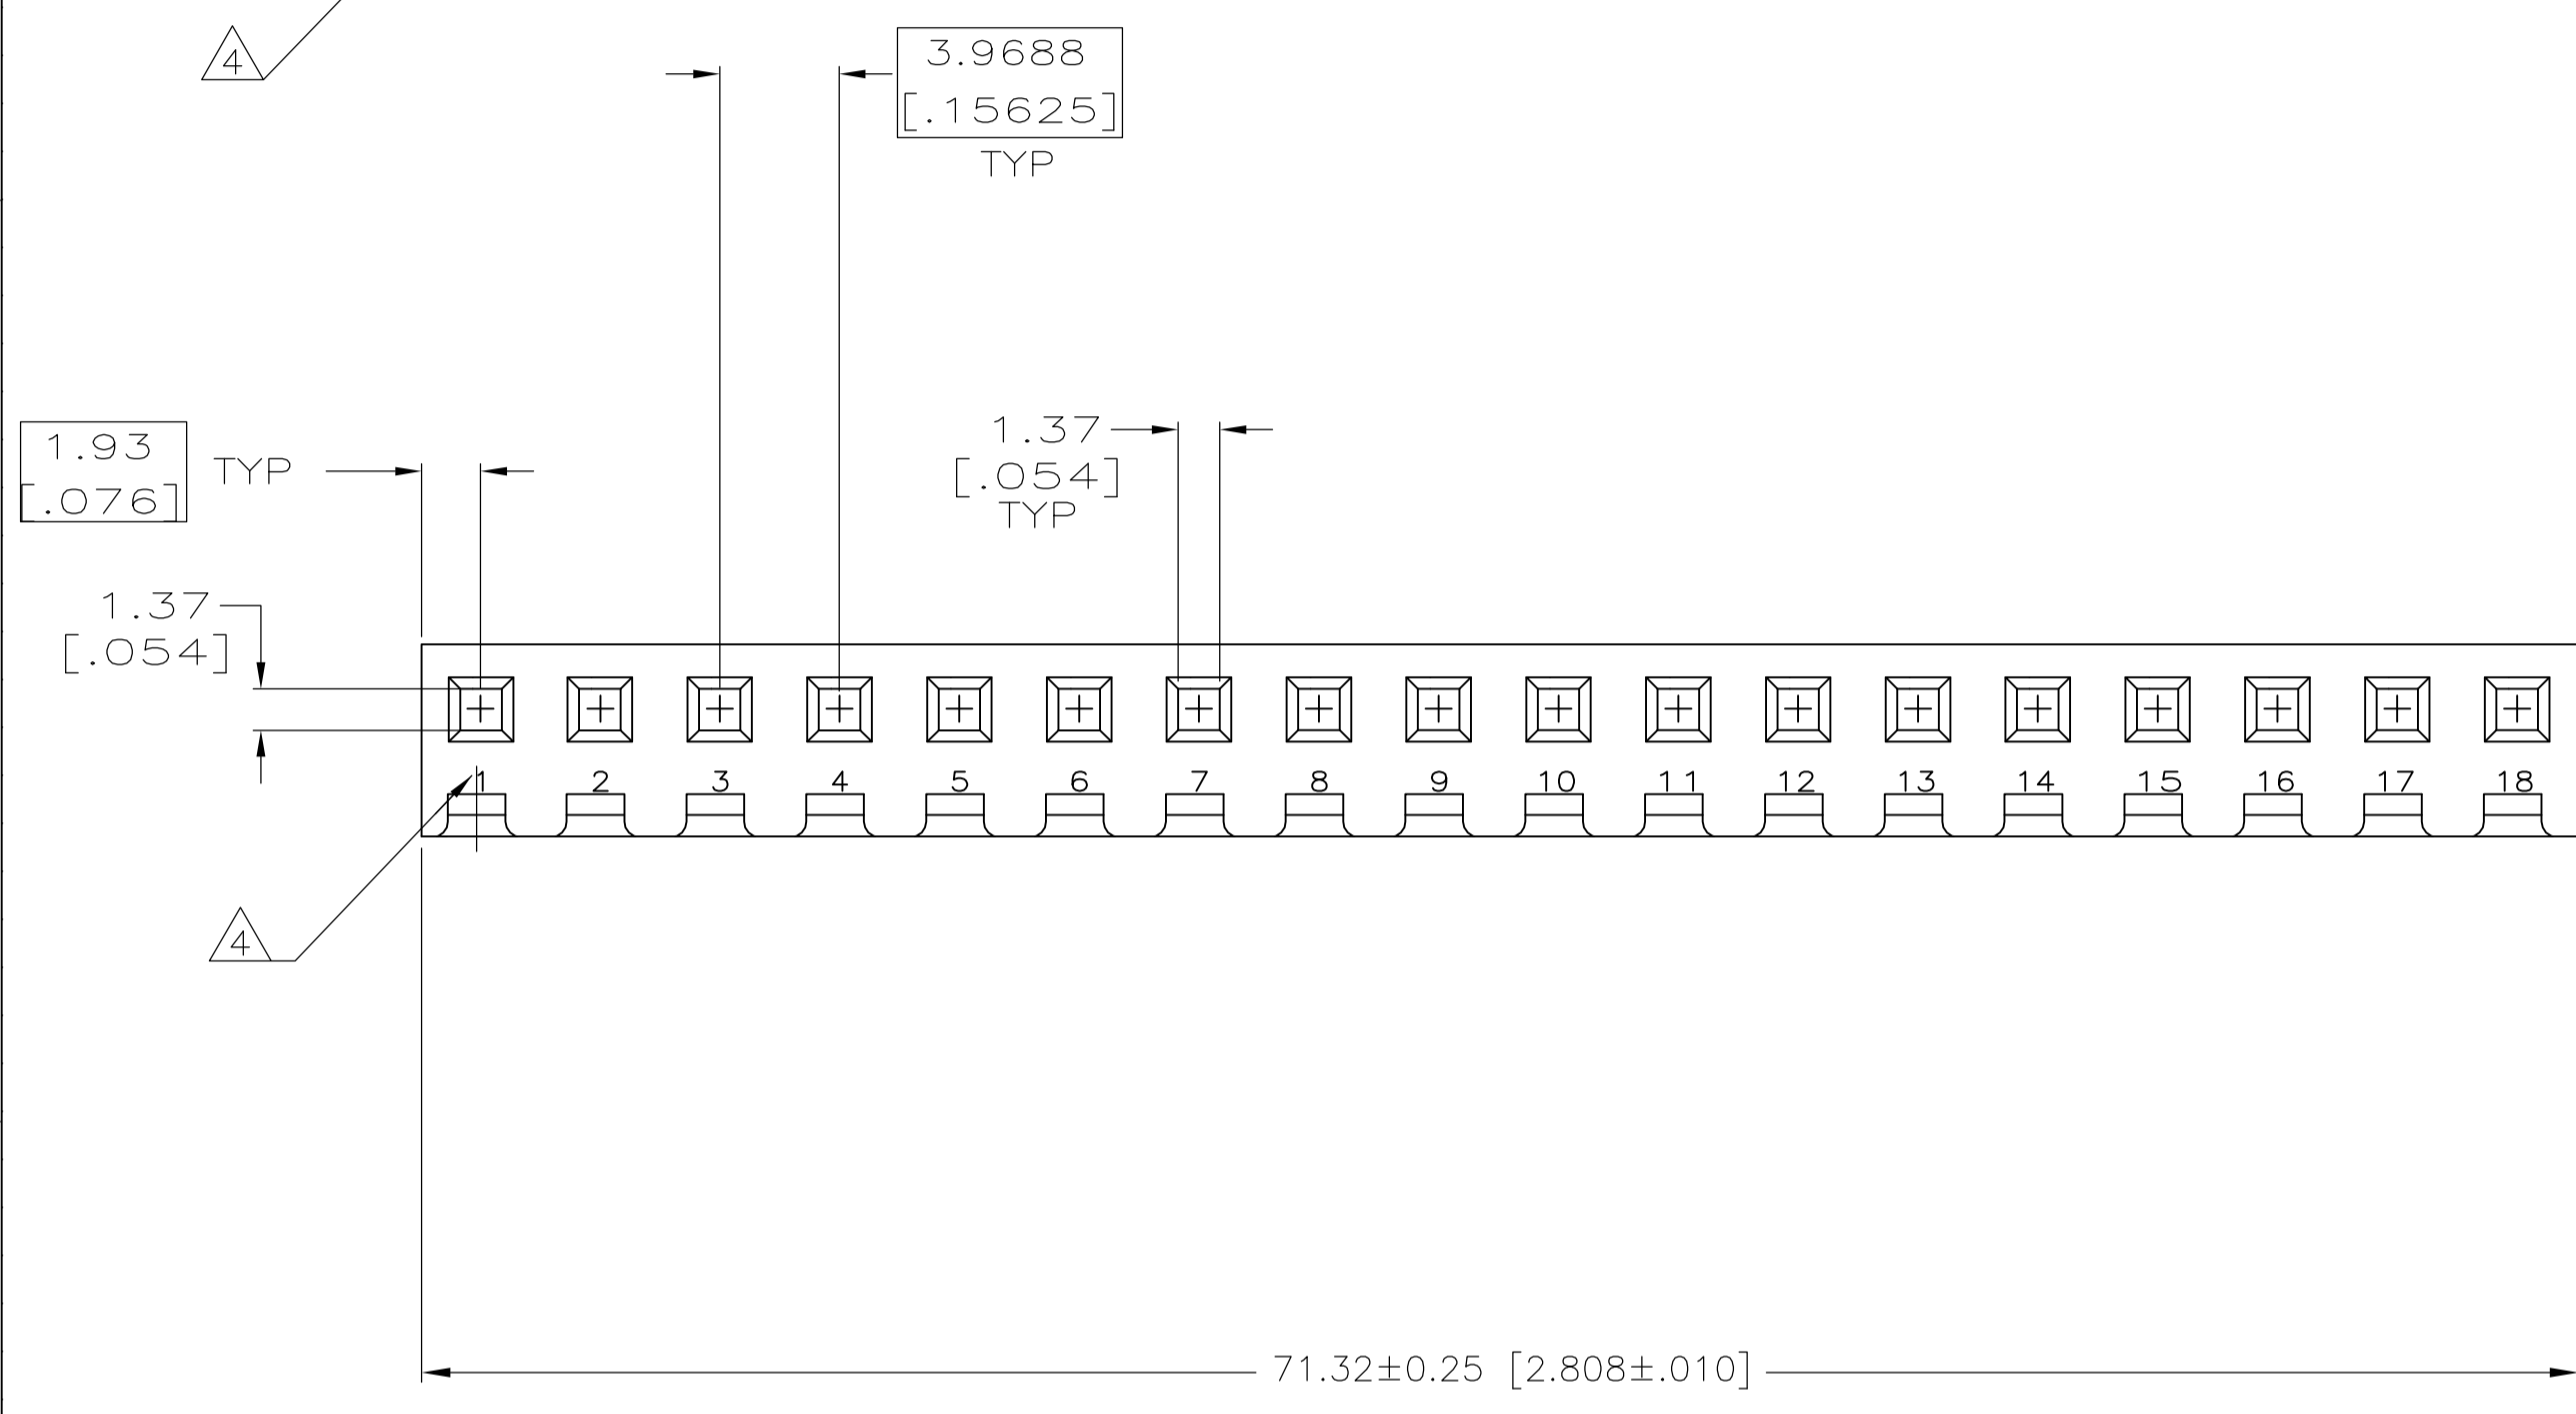
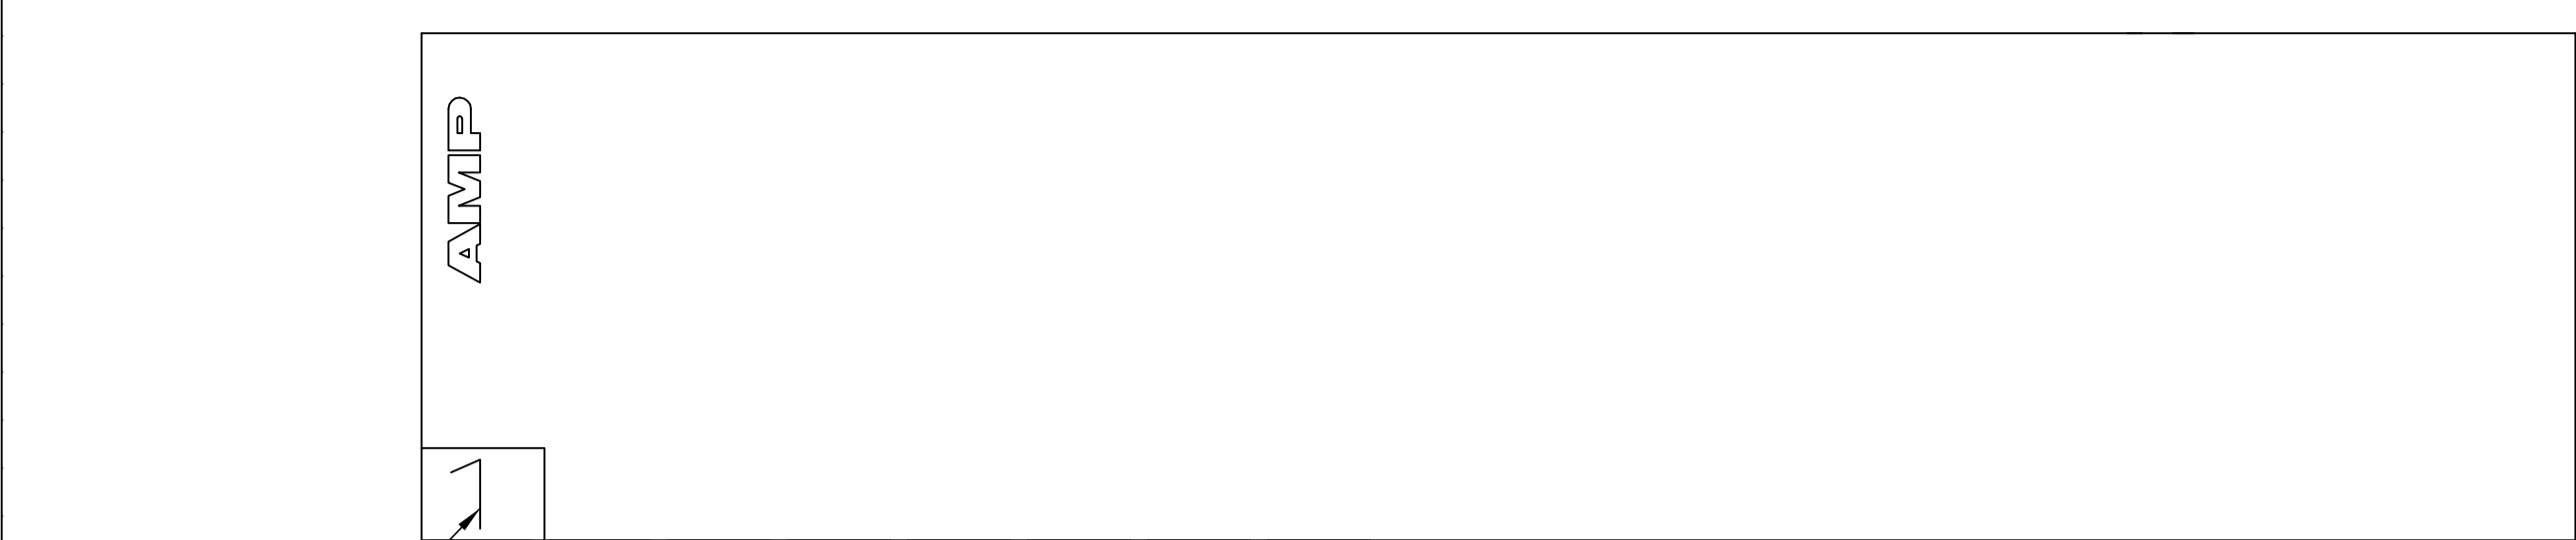


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
B		REVISED PER ECR-12-015173	23FEB2013	KH	TM		

- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4  CIRCUIT I.D. NUMBER(S) TO BE LOCATED SEQUENTIALLY AS SHOWN OR ONLY NO. 1 CIRCUIT PLACED ON TOP OF HOUSING.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6  IDENTIFY CIRCUITS AS SHOWN.



3-DIMENSIONAL MODEL NTS

1-1744158-8  
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 28JULY2005	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. ROSSI 28JULY2005	NAME HOUSING WITHOUT LOCKING RAMP,SPECIAL LABELED, SL-156	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. ROSSI 28JULY2005	RESTRICTED TO	
0. PLC ± -	1. PLC ± -	PRODUCT SPEC	SIZE A1	CAGE CODE 00779
2. PLC ± -	3. PLC ± 0.13 [.005]	APPLICATION SPEC	DRAWING NO 1744158	SCALE 4:1
4. PLC ± -	ANGLES ± -	WEIGHT	SHEET 1 OF 1	REV B
MATERIAL NYLON,UL 94V-0	FINISH	CUSTOMER DRAWING		