

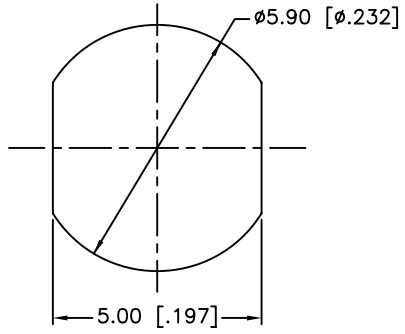


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/12/12	XXXXXX	INITIAL RELEASE

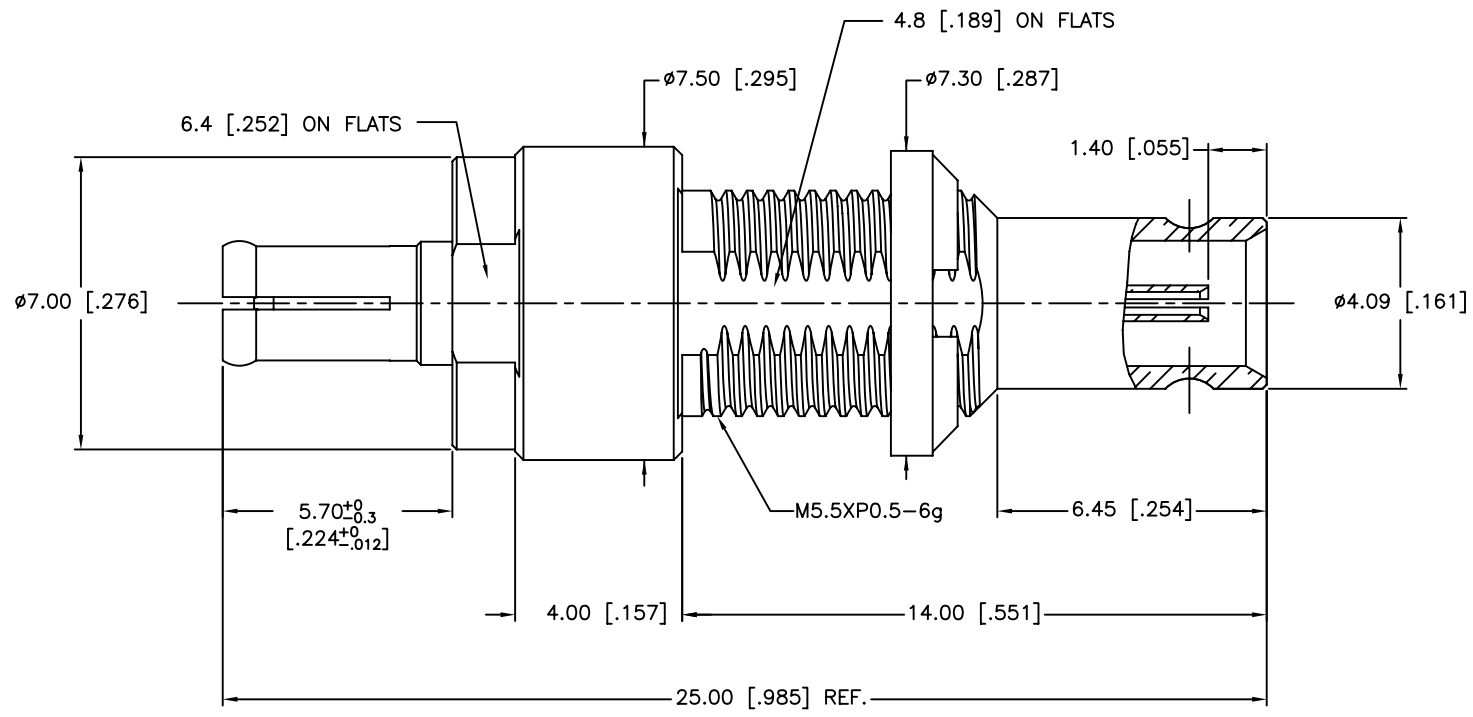

RECOMMENDED MOUNTING HOLE

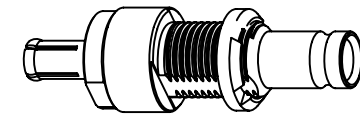

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC TO 3 GHz
3. VSWR: 1.15 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. MAX. PANEL THICKNESS=5mm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	T.DENG	04/12/12
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE		C:/CONNEX/282142-75.DWG

# Amphenol Connex

PART DESCRIPTION			
1.0/2.3 PUSH-ON PLUG TO JACK ADAPTOR			
PART NO.			
282142-75			
DWG. NO.	282142-75.DWG	REV.	NC
SIZE	A	SCALE	NA

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	SPANNER NUT
1	GOLD	BERYLLIUM COPPER	CONTACT PIN
1	NATURAL	PTFE	INSULATOR
1	GOLD	BRASS	BODY
1	GOLD	BERYLLIUM COPPER	OUT CONTACT