



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

## Features

- Halogen free available upon request by adding suffix "-HF"
- Low forward voltage drop
- Super long operating life
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

## Maximum Ratings

- Operating Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C

MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR10200UPS	10200U	200V	140V	200V

## Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current	$I_{F(AV)}$	10A	$T_L = 135^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	180A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	$V_F$	0.82V 0.67V 0.88V	$I_F=5A T_J = 25^\circ\text{C}$ $I_F=5A T_J = 125^\circ\text{C}$ $I_F=10A T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	0.1mA 10mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Maximum thermal Resistance	$R_{thJA}$	77	$^\circ\text{C/W}$

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

# MBR10200UPS

## 10 Amp Schottky Barrier Rectifier 200 Volts

### TO-277B

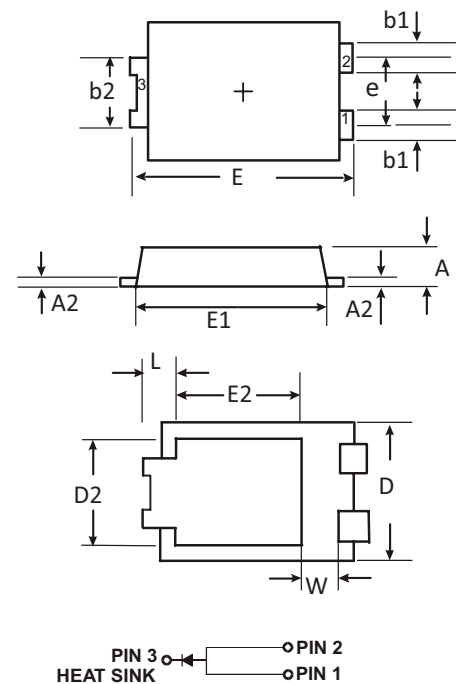

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.039	.047	1.00	1.20	
A2	.006	.017	0.15	0.43	
b1	.030	.041	0.75	1.05	
b2	.065	.077	1.65	1.95	
D	.148	.169	3.75	4.30	
D2	.110	.126	2.80	3.20	
E	.250	.264	6.35	6.70	
e	.065	.077	1.65	1.95	
E1	.207	.228	5.25	5.80	
E2	.120	.142	3.05	3.60	
L	.028	.051	0.70	1.30	
W	.031	.056	0.80	1.42	

# MBR10200UPS

## RATING AND CHARACTERISTIC CUEVES

Fig. 1 - Forward Current Derating Curve

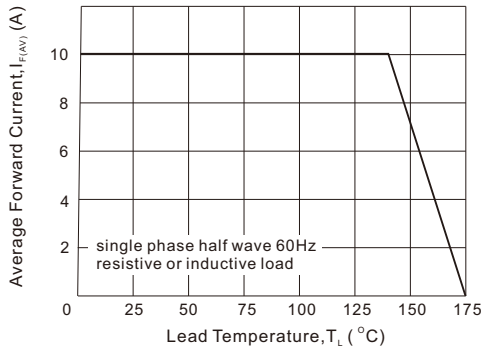


Fig. 2 - Instantaneous Forward Characteristics


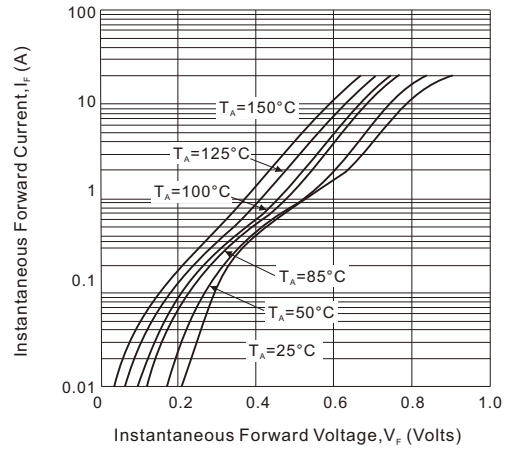


Fig. 3 - Reverse Characteristics



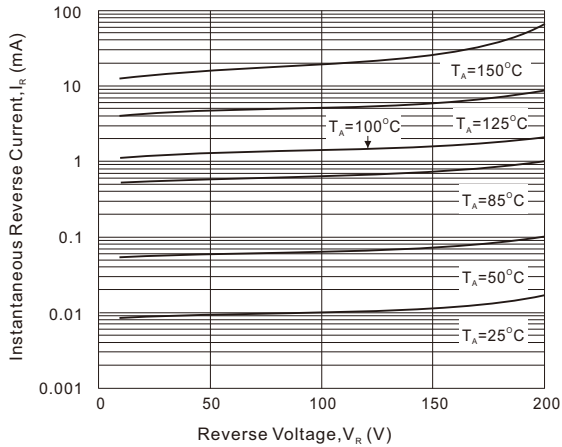

Micro Commercial Components

## Ordering Information

Device	Packing
Part Number-TP	Tape&Reel: 5Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.