

Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Complete housing, length: 85 mm, without vents, Cross connection: DIN rail bus connector, color: light gray, width: 17.5 mm, height: 70.4 mm, number of positions cross connector: 5

Why buy this product

- Item is from the ME-MAX product range
- Easy mounting
- Available in overall widths from 6.2 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional with bus connector for DIN rail mounting as well as power connection system



Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 046356 178525
GTIN	4046356178525

Technical data

General

Housing type	Complete housing
Housing material	Polyamide
Color (RAL)	light gray (7035)

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)

Dimensions

Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

Technical data

Dimensions

Length	85 mm
Constructional height	70.4 mm
Width	17.5 mm
Depth	85 mm

Technical data

Connection in acc. with standard	CUL
Indicator1	CUL1
Power dissipation without gap	3.2 W
Power dissipation with 20 mm gap	5.9 W
Number of positions	12

Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

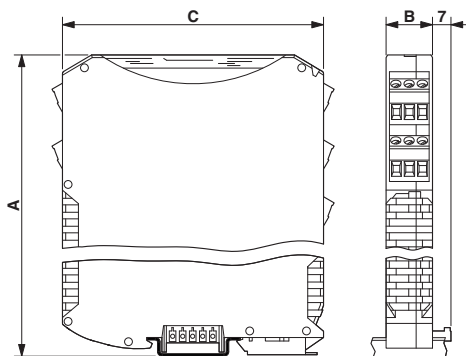

A = 70.4 mm; B = 17.5 mm; C = 85 mm

Approvals

Approvals

Approvals




UL Recognized / cUL Recognized / UL Recognized / cULus Recognized

Electronic housing - ME MAX 17,5 SF G 2-2 KMGY - 2901369

Approvals

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 240868
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>